


KAB-L VDS-062-0285RK

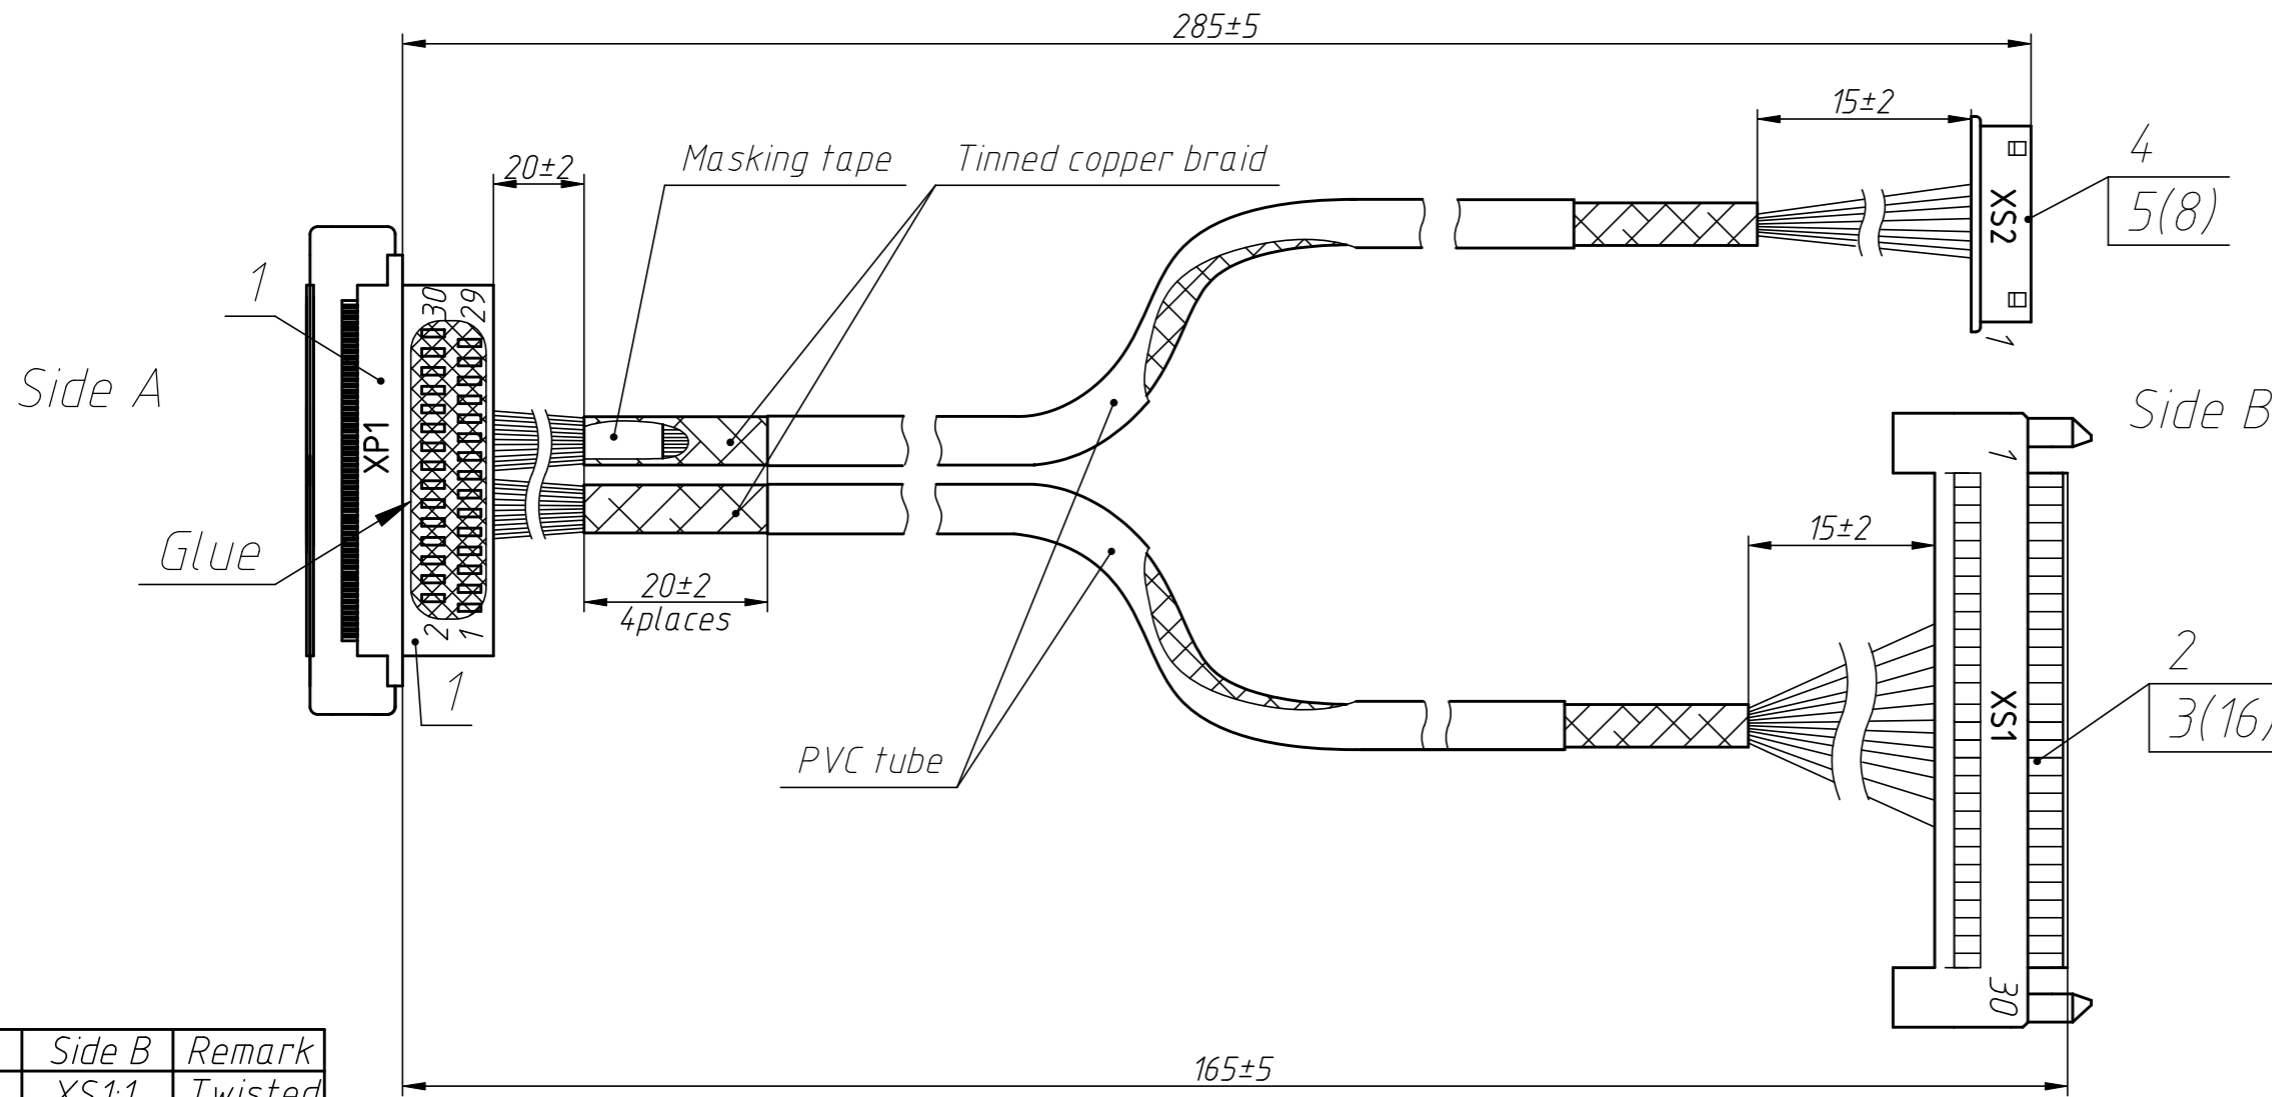

Side A	Side B	Remark
XP1:1	XS1:1	Twisted pair
XP1:2	XS1:2	pair
XP1:3	XS1:3	Twisted pair
XP1:4	XS1:4	pair
XP1:5	XS1:5	Twisted pair
XP1:6	XS1:6	pair
XP1:7	XS1:24	
XP1:8	XS1:8	Twisted pair
XP1:9	XS1:9	pair
XP1:10	XS1:10	Twisted pair
XP1:11	XS1:11	pair
XP1:12	XS1:14	
XP1:14	XS2:2	
XP1:15	XS2:3	
XP1:16	XS2:7	
XP1:17	XS2:6	
XP1:18	XS2:5	
XP1:20	XS2:10	
XP1:21	XS2:9	
XP1:22	XS2:8	
XP1:25	XS1:28	
XP1:28	XS1:7	
XP1:29	XS1:29	
XP1:30	XS1:30	

Balanced impedance of twisted pair 100 Ohm.
All dimensions in mm.

Pos.	Designation	Name	Quant.	Remark
1		KB9501-30HG2A-TX		
		with PULL ROD (with Insulator)		
		(XYCO Precision Connectors)	1	XP1
2		Socket FI-X30HL		
		JAE	1	XS1
3		Contact FI-XC3A-1-15000		
		JAE	16	
4		Socket 51021-1000		
		Molex	1	XS2
5		Contact 50079-8000		
		Molex	8	
7		Wires AWG 26-30		

BMLJ-22.3KK