


NOTES

- * Poles:4-34
- * Material: NYLON66 UL94V-2 BLACK

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

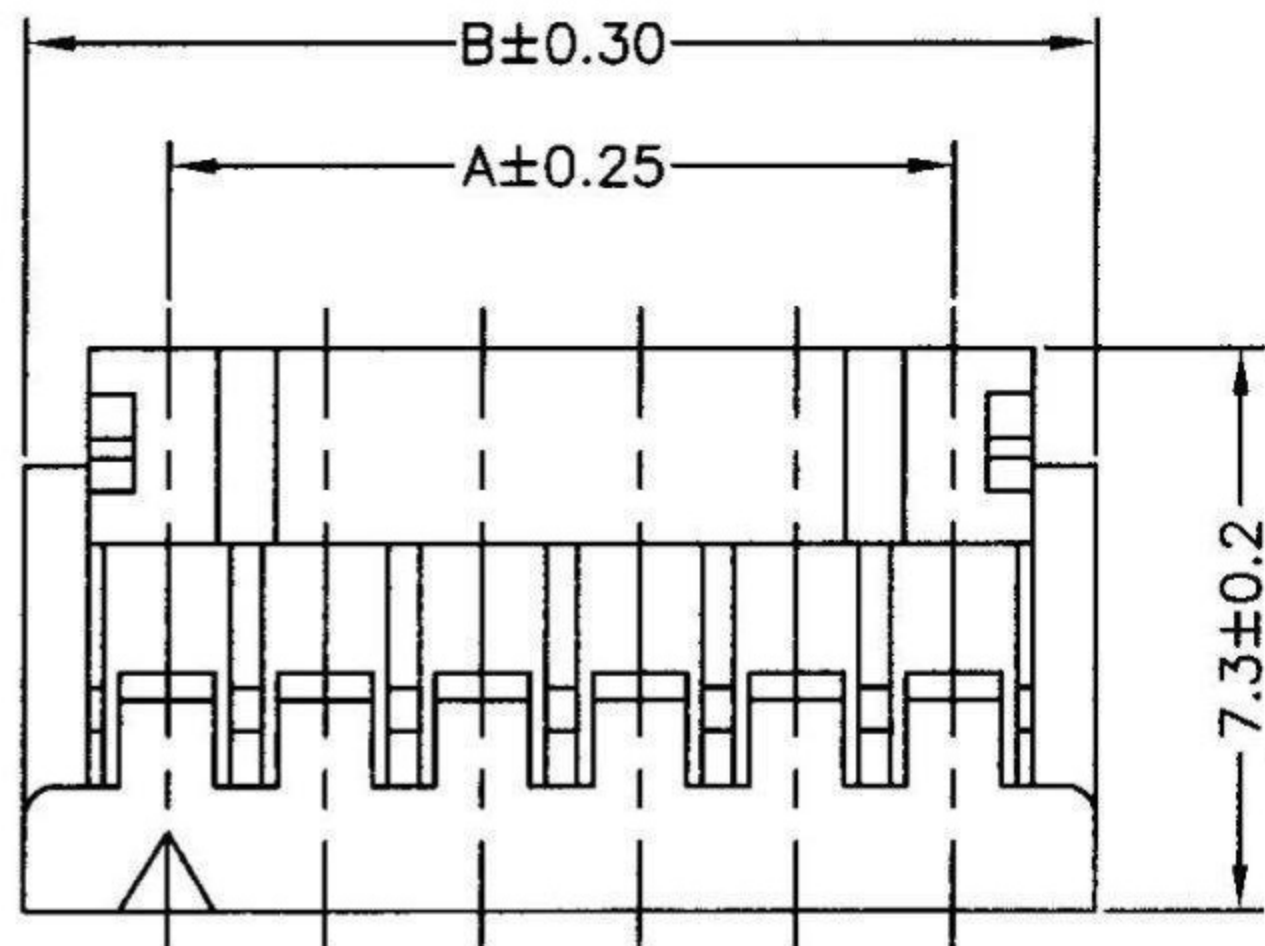

CIRCUITS	DIMENSION mm	
	A	B
4	2.00	6.00
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00

H 2001 — 04 P D B 0 0 0 R

- | | | |
|-------------------------------------|--|---------------------|
| 1. PRODUCTS:
H:Housing | 4. CONTACT TYPE:
P:Non Distribution | 7. FILL IT WITH "0" |
| 2. SERIES NO.:
2001 | 5. ROW TYPE:
D: Dual Rows | 8. FILL IT WITH "0" |
| 3. CONTACT NO.:
04(2x2)-32(2x16) | 6. INSULATOR COLOR:
B: Black | 9. FILL IT WITH "0" |
| | | 10. R: ROHS |

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE	PART NAME 品名 2.00mm HOUSING 2*XXP DUAL ROW BLACK COLOR ROHS
DWG. 製圖 KAREN	SCALE 比例 參考	UNIT 單位 MM	SIZE 紙張尺寸 A4
DATE 制表日 2013/05/14	PAGE 張數 1 OF 1	REV. 版本 C	PART NO. 料號 H2001-XXPDB000R