

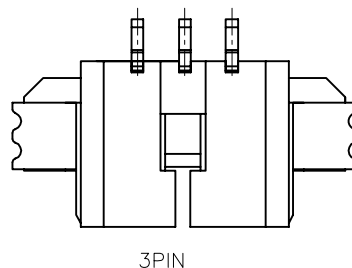
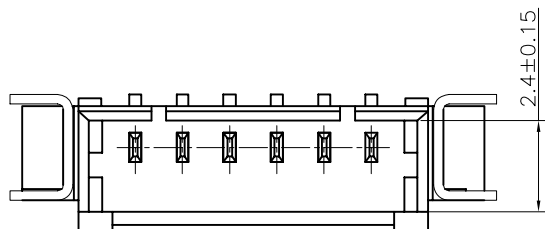



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	01	BATCH PRODUCTION INITIAL RELEASE.	2020.07.30	李全樂


Specifications
 Current Rating:1Amp
 Voltage rating:125v ac/dc
 Insulation Resistance:100MQ Min.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩ Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP(Nylon) or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

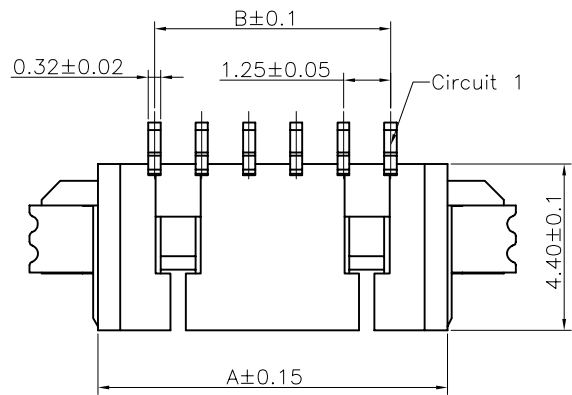

PART NO	Dimensions	
	A	B
02P	4.25	1.25
03P	5.50	2.50
04P	6.75	3.75
05P	8.00	5.00
06P	9.25	6.25
07P	10.50	7.50
08P	11.75	8.75
09P	13.00	10.00
10P	14.25	11.25
11P	15.50	12.50
12P	16.75	13.75
13P	18.00	15.00
14P	19.25	16.25
15P	20.50	17.50

Ordering Information

G WDD123-XX XX A 001 C X S X-9B
 No. of Pins per Row 02~15 Standard Plating 01=Tin Color 2=White
 Selective Plating 02=Gold Flash Standard Packing D=Tape Reel Selective Packing N=PE Bag

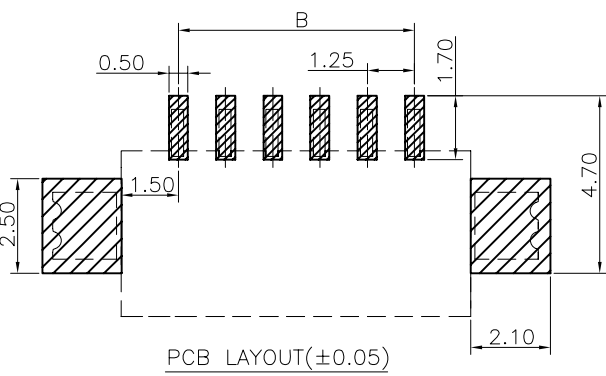

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±	X.±0.50
.X*±	.X±0.35
.XX*±	.XX±0.25
.XXX*±	.XXX±0.10

DESIGN: 李全樂
 CHECKED: 方秋香
 APPROVED: 方秋香

DATE:
 DATE:
 DATE:

DWG. NO. GWDD123-CA1CS
 PART NO. GWDD123-XXXXA001CX SX-9B

TITLE:
 1.25 mm Wafer 90° SMT Connectors

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1