



Ver.	Modify No.	Details	Area	P.I.C	Date
02	N01	Double-side tape is added to the back of the Sensor	DWG	Curry	230602


TOP VIEW

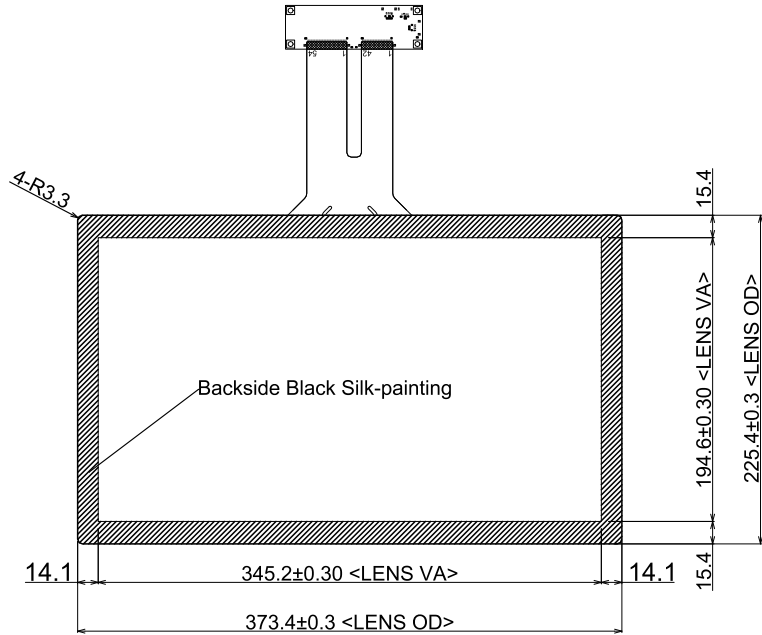

SIDE VIEW

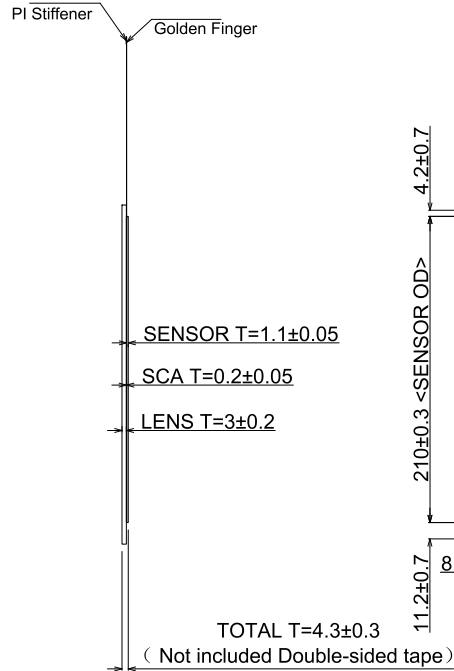

BOTTOM VIEW

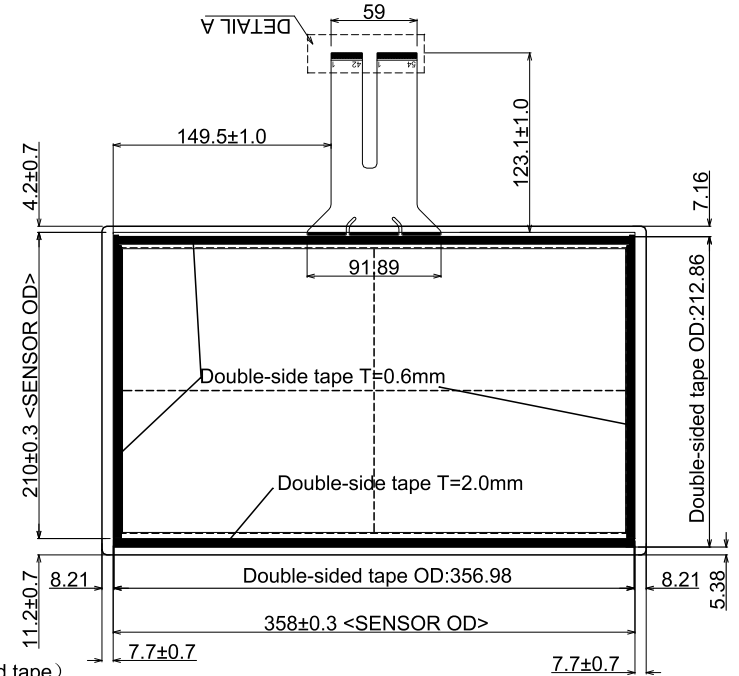



USB PIN ASSIGNMENT

1	VBUS
2	DN
3	DP
4	GND

Technical Datasheet:

- Structure: Cover Glass+SCA+ITO Glass
- Controller: BTP-GG-CTR-ILI-156B-R12 COB
- Controller IC: ILI 2510
- Cover Glass: T=3mm, Surface hardness ≥6H
- Light transmittance: ≥85%
- Working Temperature: -20°C~+70°C, ≤85%RH;
- Storage Temperature: -30°C~+80°C, ≤85%RH;
- Unmarked Tolerance: ± 0.3 mm;
- All material used conform to RoHS standards

CONTROLLER
SC 2:1

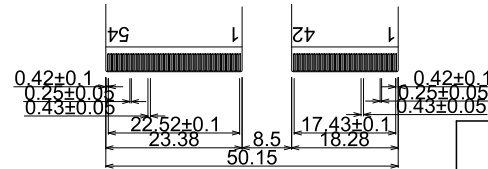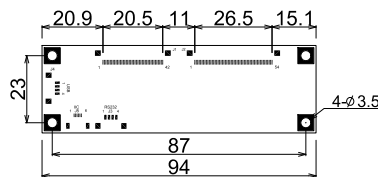

DETAIL A
SC 4:1

Designed by:	Curry.Wang
Checked by:	Betty.Fu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.	BTP-GG-TPB-15.6-ILI-R12-V02			
Product Name:	15.6 inch Touch Panel	Drawing No.	G156230511R12	
		Project Code.	G156R12	
Business Unit:	SNT-BTP	Period Mark	A	View Angle
				Ratio
BOM Code	1.13.156.04.0112			1:1
Product Series	BTP-CG	Page 1	Total 1 Page	
思诺泰科创电子(苏州)有限公司 SINOTRONICS INC.				