

BROOKE-G2-S

~20° spot beam compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Ø 45.0 mm **Dimensions** Height 18.9 mm Fastening socket Colour metal

Box size 480 x 280 x 300 mm


Box weight 4.8 kg Quantity in Box 720 pcs yes 🕕 ROHS compliant





MATERIAL SPECIFICATIONS:


Component **Type** Material Colour Coating **BROOKE-G2-S** Reflector PC metal **HMDS**




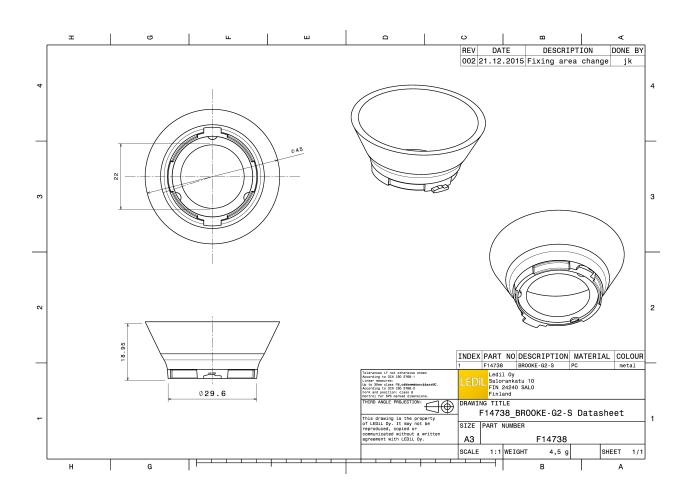

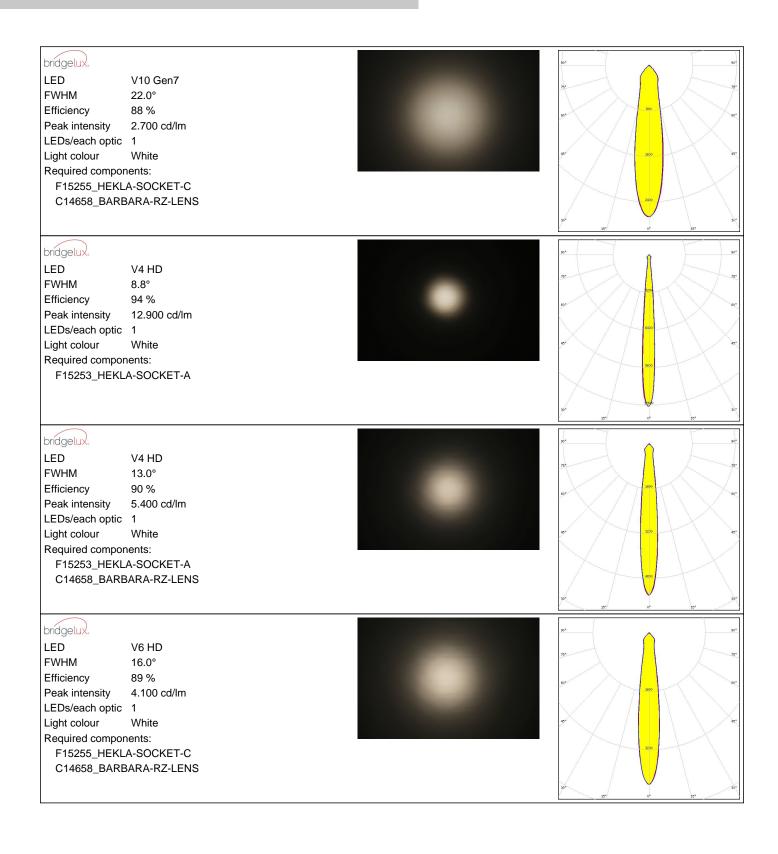

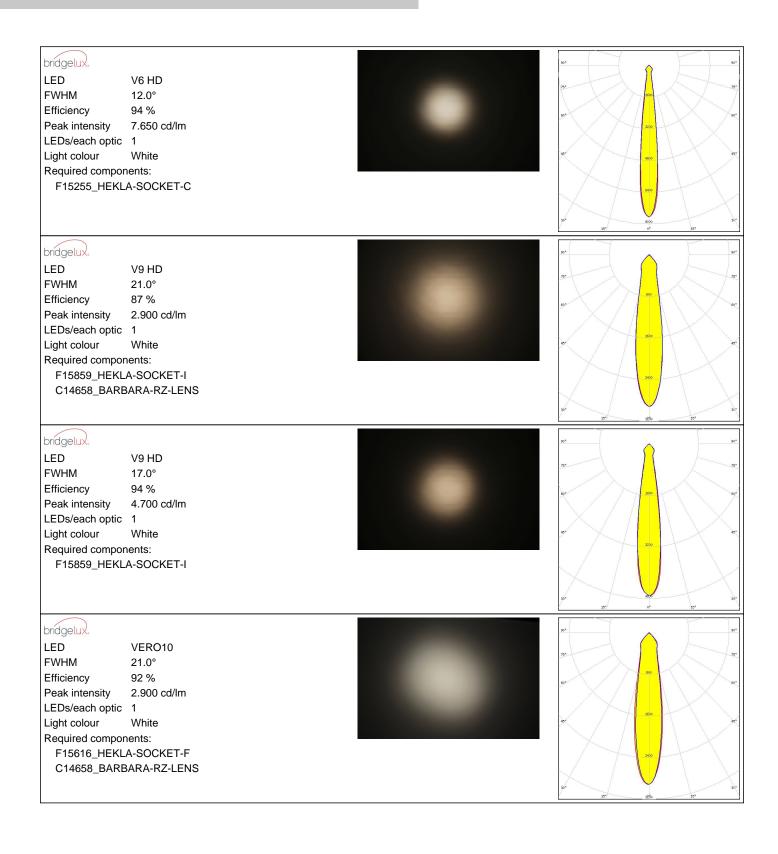

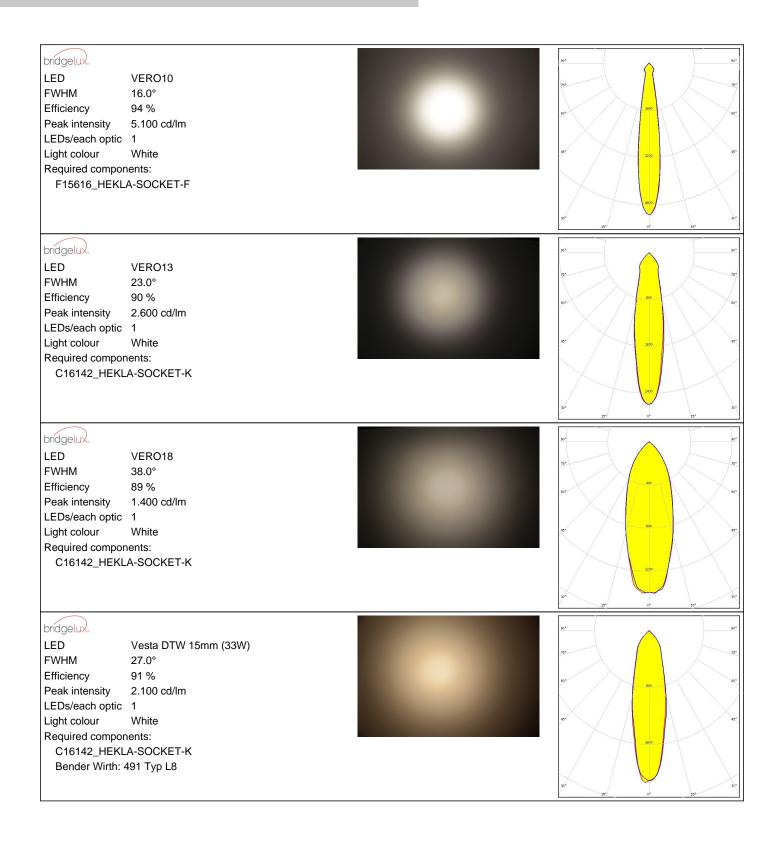

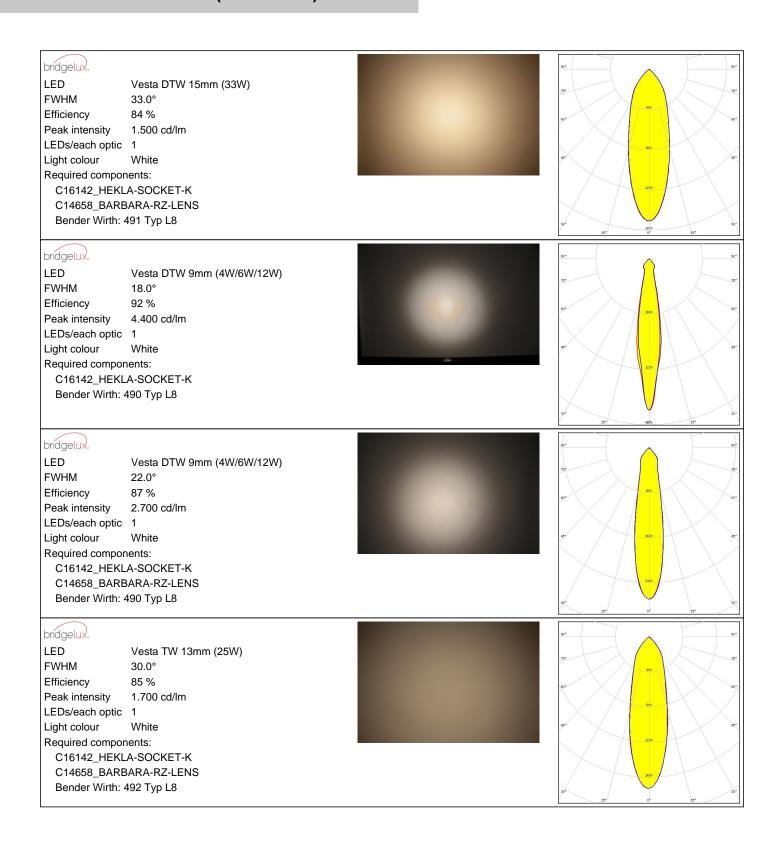

PHOTOMETRIC DATA (MEASURED):

bridgelux


LED Vesta TW 9mm (12W)

FWHM 23.0°
Efficiency 85 %
Peak intensity 2.400 cd/lm
LEDs/each optic 1

Light colour White
Required components:
C16142_HEKLA-SOCKET-K
C14658_BARBARA-RZ-LENS

Bender Wirth: 489 Typ L8





CITIZEN


LED CLC020 Series (Dim-To-Warm)

FWHM 26.0°
Efficiency 84 %
Peak intensity 2.000 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 487 Typ L8






CITIZEN

LED CLC030 Series (Dim-To-Warm)

FWHM 23.0° Efficiency 89 % Peak intensity 2.200 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142 HEKLA-SOCKET-K





CITIZEN


LED CLC030 Series (Dim-To-Warm)

FWHM 30.0° Efficiency % Peak intensity 1.600 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 436 Typ L8





PHOTOMETRIC DATA (MEASURED):

CITIZEN

Light colour

LED CLL02x/CLU02x (LES10)


White

FWHM 16.0°
Efficiency 94 %
Peak intensity 4.800 cd/lm
LEDs/each optic 1

Required components:

F15255_HEKLA-SOCKET-C





CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 16.0° Efficiency 94 % Peak intensity 4.800 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C

CITIZEN

 LED
 CLU700/701

 FWHM
 12.0°


 Efficiency
 94 %

 Peak intensity
 7.750 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C





CITIZEN

 LED
 CLU700/701

 FWHM
 17.0°


 Efficiency
 90 %

 Peak intensity
 3.800 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS





PHOTOMETRIC DATA (MEASURED):

CITIZEN


LED CLU7A2 (LES 4.2mm)

FWHM 8.0°
Efficiency 94 %
Peak intensity 15.900 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C





CITIZEN


LED LCN-C01B (Tunable White)

FWHM 25.0°
Efficiency 86 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1

Light colour White
Required components:
C16142_HEKLA-SOCKI

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8





CITI7FN


LED LCN-C02B (Tunable White)

FWHM 32.0°
Efficiency 84 %
Peak intensity 1.600 cd/lm

LEDs/each optic 1 Light colour White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8






CITIZEN

LED LCN-C02B (Tunable White)

FWHM 27.0°
Efficiency 89 %
Peak intensity 2.300 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K





PHOTOMETRIC DATA (MEASURED):

CREE 💠 LED CMA1516 **FWHM** 18.0° Efficiency 94 % Peak intensity 4.200 cd/lm LEDs/each optic 1 Light colour White Required components: F15256_HEKLA-SOCKET-D CREE ÷ LED CMA1825 **FWHM** 24.0° Efficiency Peak intensity 2.700 cd/lm LEDs/each optic 1 White Light colour Required components: F15254_HEKLA-SOCKET-B CREE ÷ LED CMT14xx **FWHM** 19.0° Efficiency 95 % Peak intensity 3.800 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C CREE \$ LED CXA/B 13xx **FWHM** 11.0° Efficiency 94 % Peak intensity 8.200 cd/lm LEDs/each optic 1 White Light colour Required components: F15956_HEKLA-SOCKET-J


PHOTOMETRIC DATA (MEASURED):

CREE 🕏

LED CXA/B 15xx **FWHM** 16.0° Efficiency 94 % Peak intensity 4.400 cd/lm LEDs/each optic 1 Light colour White

Required components: F15256_HEKLA-SOCKET-D





ELUMINUS


LED CDM-14 (Dim-To-Warm)

White

FWHM 28.0° 83 % Efficiency Peak intensity 1.800 cd/lm LEDs/each optic 1

Light colour Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 491 Typ L8





ELUMINUS

LED CDM-6 (Dim-To-Warm)


White

FWHM 18.0° Efficiency 86 % Peak intensity 3.600 cd/lm LEDs/each optic 1

Light colour

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 490 Typ L8






ELUMINUS


LED CDM-9 (Dim-To-Warm)

FWHM 21.0° Efficiency 85 % 3.100 cd/lm Peak intensity LEDs/each optic 1

White Light colour Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 490 Typ L8





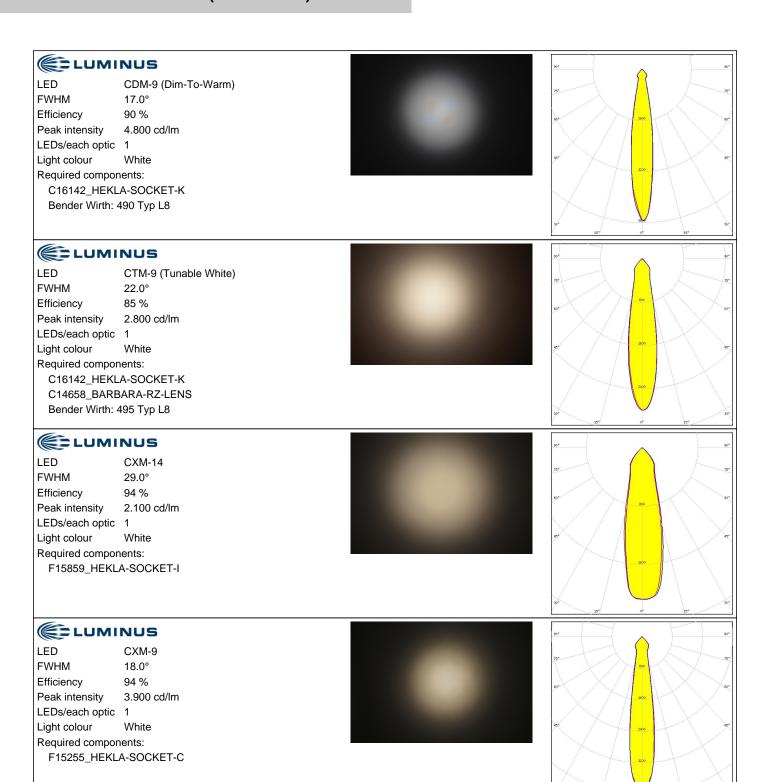

PHOTOMETRIC DATA (MEASURED):

WNICHIA


LED NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM 15.0°
Efficiency 86 %
Peak intensity 5.100 cd/lm
LEDs/each optic 1

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 497 Typ L8

White





WNICHIA

Light colour


LED NJCWL024Z-V1MT: COB L-Type Tunable White

FWHM 18.0°
Efficiency 81 %
Peak intensity 3.100 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS

Bender Wirth: 497 Typ L8





WNICHIA


LED NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM 25.0° Efficiency 85 % Peak intensity 2.200 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
C14658_BARBARA-RZ-LENS

Bender Wirth: 498 Typ L2

nable White



PHILIPS


LED Fortimo SLM L09 CoB

FWHM 21.0° Efficiency 89 % Peak intensity 2.800 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H C14658_BARBARA-RZ-LENS







PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo SLM L09 CoB

FWHM 18.0°
Efficiency 94 %
Peak intensity 4.200 cd/lm
LEDs/each optic 1
Light colour White

F15858_HEKLA-SOCKET-H





PHILIPS

Required components:

LED Fortimo SLM L13 CoB

FWHM 32.0° Efficiency 85 % Peak intensity 1.600 cd/lm

LEDs/each optic 1 Light colour White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 432 Typ L8



PHILIPS


LED Fortimo SLM L13 CoB

FWHM 27.0° Efficiency 89 % Peak intensity 2.100 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

Bender Wirth: 432 Typ L8






SAMSUNG

LED COB D Series LES 9.8 mm

FWHM 18.0°
Efficiency 94 %
Peak intensity 4.300 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C



PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED COB D Series LES 9.8 mm

FWHM 18.0° Efficiency 94 % Peak intensity 4.300 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C

LED COB D Series LES 9.8 mm

FWHM 22.0° 90 % Efficiency Peak intensity 2.800 cd/lm

LEDs/each optic 1 Light colour White Required components:


F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS

SAMSUNG

LC010C G2 LED **FWHM** 11.0° Efficiency 93 % Peak intensity 9.000 cd/lm

LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C






SAMSUNG

LED LC020C G2 **FWHM** 17.0° Efficiency 94 % 4.600 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I





PHOTOMETRIC DATA (MEASURED):



LED


MJT COB LES 6

FWHM 11.0° Efficiency 93 % Peak intensity 8.300 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15255_HEKLA-SOCKET-C






SEOUL SEOUL SEMICONDUCTOR

LED MJT COB LES 9.8

FWHM 20.0° 92 % Efficiency Peak intensity 3.300 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C





TRIDONIC

LED SLE G1 11mm 1000lm 927 Sunset R EXC

FWHM 27.0° Efficiency 87 % Peak intensity 1.900 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I C14658_BARBARA-RZ-LENS





TRIDONIC


LED SLE G1 15mm 2000lm 927 Sunset R EXC

FWHM 36.0° 86 % Efficiency 1.400 cd/lm Peak intensity LEDs/each optic 1

White Light colour Required components:

F15859_HEKLA-SOCKET-I C14658_BARBARA-RZ-LENS





PHOTOMETRIC DATA (MEASURED):

TRIDONIC


LED SLE G7 LES09

FWHM 17.0°
Efficiency 94 %
Peak intensity 4.800 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15255_HEKLA-SOCKET-C





TRIDONIC


LED SLE G7 LES09

FWHM 20.0°
Efficiency 91 %
Peak intensity 3.100 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS






TRIDONIC

LED SLE G7 LES13

FWHM 29.0° Efficiency 87 % Peak intensity 1.800 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I
C14658_BARBARA-RZ-LENS






TRIDONIC

LED SLE G7 LES13

FWHM 26.0° Efficiency 94 % Peak intensity 2.500 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I





PHOTOMETRIC DATA (MEASURED):


TRIDONIC

LED SLE G7 LES15

FWHM 28.0°
Efficiency 94 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1

Light colour White
Required components:
F15859_HEKLA-SOCKET-I





XICATO


LED XTM - 19mm LES

FWHM 33.0° Efficiency 92 % Peak intensity 1.700 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C15743_XTM-ADAPTER-50-B






XICATO

LED XTM - 9mm LES

C15743_XTM-ADAPTER-50-B

FWHM 17.0° Efficiency 94 % Peak intensity 4.800 cd/lm

LEDs/each optic 1
Light colour White
Required components:



PHOTOMETRIC DATA (SIMULATED):

bridgelux.

LED V10 Gen6 **FWHM** 15.0° Efficiency 0 % Peak intensity 0.000 cd/lm

LEDs/each optic 1 Light colour White Required components: F14988_HEKLA-SOCKET-E

bridgelux.

LED V10 Gen6 **FWHM** 15.0° Efficiency % Peak intensity cd/lm LEDs/each optic 1 White Light colour Required components:

F14988_HEKLA-SOCKET-E

bridgelux

LED V8 Gen6 **FWHM** 15.0° Efficiency 0 % Peak intensity 0.000 cd/lm

LEDs/each optic 1 Light colour White Required components: F15253_HEKLA-SOCKET-A

bridgelux.

LED V8 Gen6 **FWHM** 15.0° Efficiency 0 % 0.000 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components: F15253_HEKLA-SOCKET-A

PHOTOMETRIC DATA (SIMULATED):


CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 18.0° 92 % Efficiency Peak intensity 4.300 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C




CITIZEN

LED CLL03x/CLU03x

FWHM 31.0° 93 % Efficiency Peak intensity 1.890 cd/lm


LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I



CREE ÷

LED CMT14xx **FWHM** 17.0° Efficiency 90 % 4.240 cd/lm

Peak intensity LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C



CREE &

LED CXA/B 15xx **FWHM** 15.0° Efficiency 0 % 0.000 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components:

F15256_HEKLA-SOCKET-D

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

PHOTOMETRIC DATA (SIMULATED):

CREE 🚓

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM 22.0°
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1

Light colour White Required components:

F15254_HEKLA-SOCKET-B

CREE 💠

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM 22.0°
Efficiency 0 %
Peak intensity 0.000 cd/lm

LEDs/each optic 1 Light colour White Required components:


F15254_HEKLA-SOCKET-B

WNICHIA

LED COB L-Type (LES 9)

FWHM 16.0° Efficiency 93 % Peak intensity 5.400 cd/lm

LEDs/each optic 1 Light colour White Required components: F15858_HEKLA-SOCKET-H




MNICHIA

LED COB T-Type
FWHM 12.0°
Efficiency 91 %
Peak intensity 9.020 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15848_HEKLA-SOCKET-G



PHOTOMETRIC DATA (SIMULATED):


OSRAM

LED

Soleriq S13 19x19

FWHM 23.9° 93 % Efficiency Peak intensity 2.730 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I




OSRAM Opto Semiconductors

LED Soleriq S9 **FWHM** 17.4° 93 % Efficiency Peak intensity 4.360 cd/lm

LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C




SAMSUNG

LED COB D Series LES 14.5 mm

FWHM 29.0° Efficiency 88 % Peak intensity 1.940 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I




TRIDONIC

LED SLE G6 LES10

FWHM 15.0° Efficiency 94 % 5.800 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C




PHOTOMETRIC DATA (SIMULATED):

TRIDONIC

LED SLE G6 LES15

FWHM 25.0° Efficiency 92 % Peak intensity 2.400 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I




TRIDONIC

LED SLE G6 LES17

FWHM 29.0° Efficiency 92 % Peak intensity 2.010 cd/lm

LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy