Ver.	Modify No.	Details	Area	P.I.C	Date
02	01	The thickness of the glass has been changed from 1.8mm to 1.1mm	DWG	Curry	251224
03	02	Put tail to above , decrease length of touch till 40 mm；moving the hole (transmitter 15 %) to above on 2-4 mm	DWG	Jimmy	251228

Front View

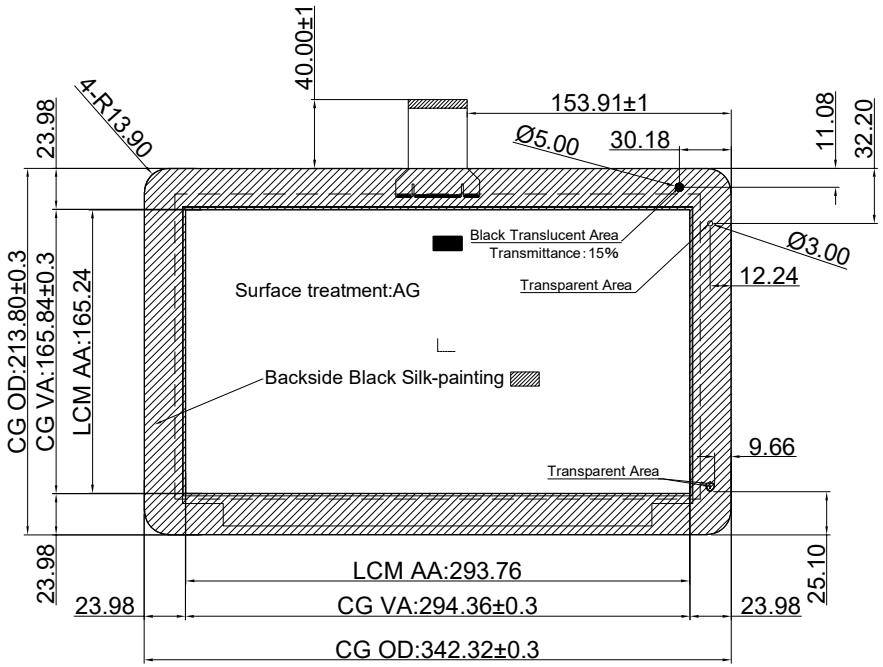

Side View

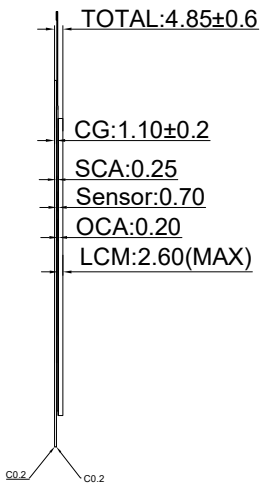

Back View

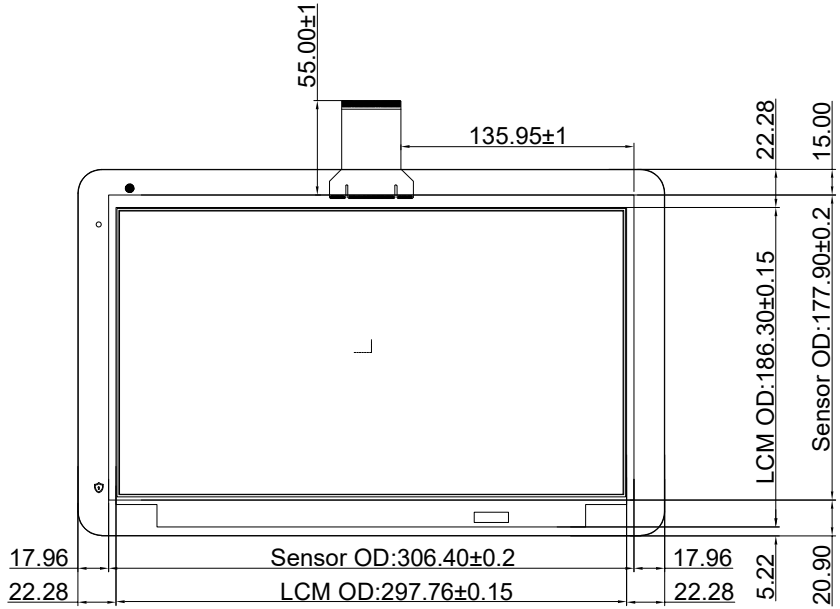



USB

PIN	Definition
1	5V
2	DN
3	DP
4	GND

Technical Datasheet：
1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 1.1mm Tempered Glass
3. LCD: ATNA33TP11
4. TP Controller: BTP-TPM-CTR-ILI-13.3B-SN09
5. TP Controller IC: ILI2511(Interface: USB/IIC)
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥82%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standardsd

Part No.	BTP-TPM-AT-13.3-ILI-SN09-V03				
Product Name： 13.3 inch Touch Display (TP+LCM Optical Bonding)		Drawing No.	PM133251223SN09V03		
		Project Code.	PM133SN09V03		
Designed by:	Curry. Wang	Business Unit： SNT-BTP	Period Mark	View Angle	Ratio
Checked by:	Jimmy.lu		A		1:1
Approved by:	Cale.Chen				
Workmanship:		BOM Code	2.03.133.01.0109	Page 1	Total 1 Page
Standardization:	Link.Chen	Product Series	BTP-TPM	思诺泰科创电子（苏州）有限公司 SINOTECTRONICS INC.	
Released by:	Rocky.Liu				

E-File Name: PM133251223SN09V02

A3