

BROOKE-G2-W

~50° wide beam compatible with LEDiL HEKLA.

TECHNICAL SPECIFICATIONS:

Dimensions Ø 45.0 mm Height 18.9 mm Fastening socket Colour metal

Box size 480 x 280 x 300 mm


Box weight 5.2 kg Quantity in Box 720 pcs yes 🕕 ROHS compliant





MATERIAL SPECIFICATIONS:


Component **Type** Material Colour Coating **BROOKE-G2-W** Reflector PC metal lacquer




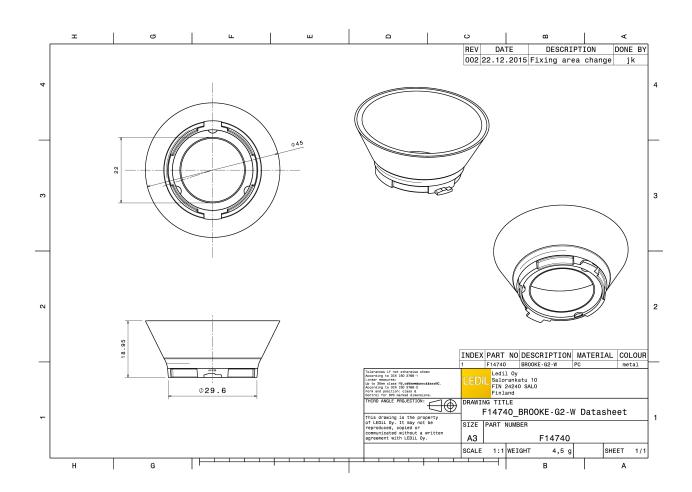


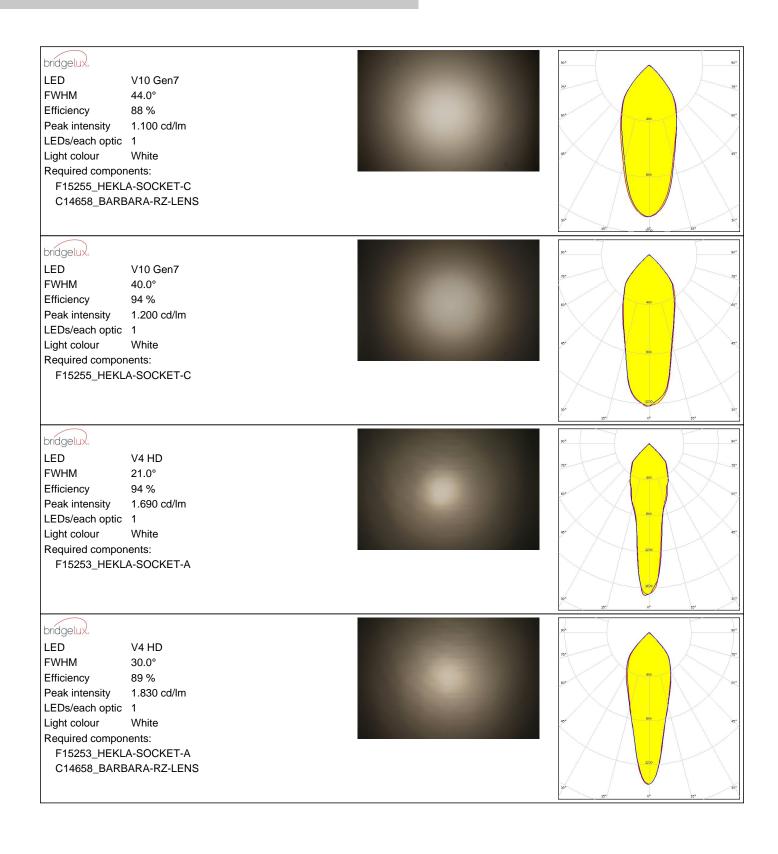

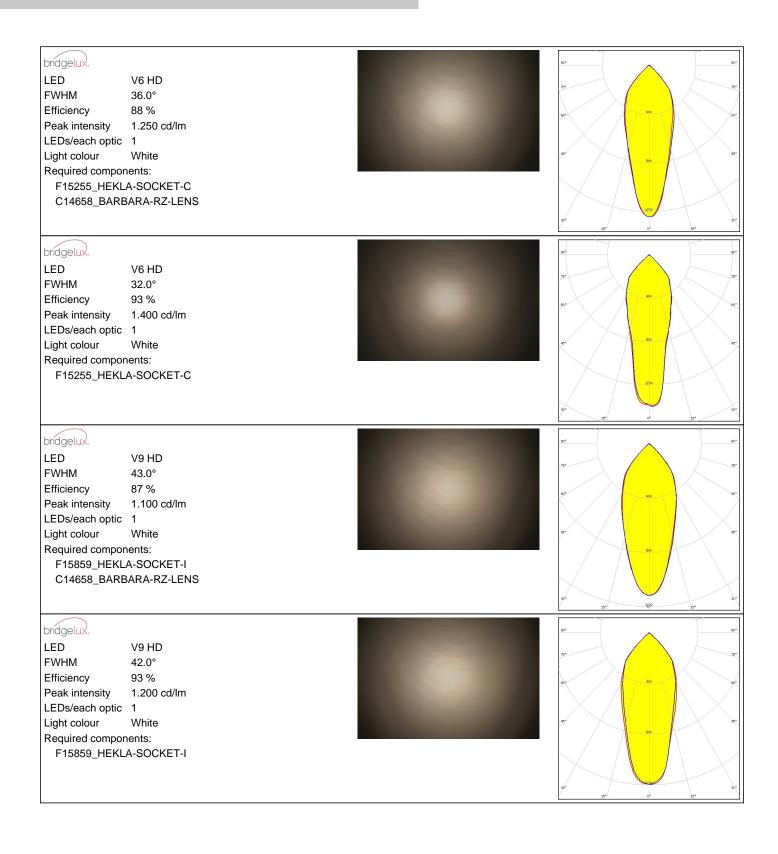

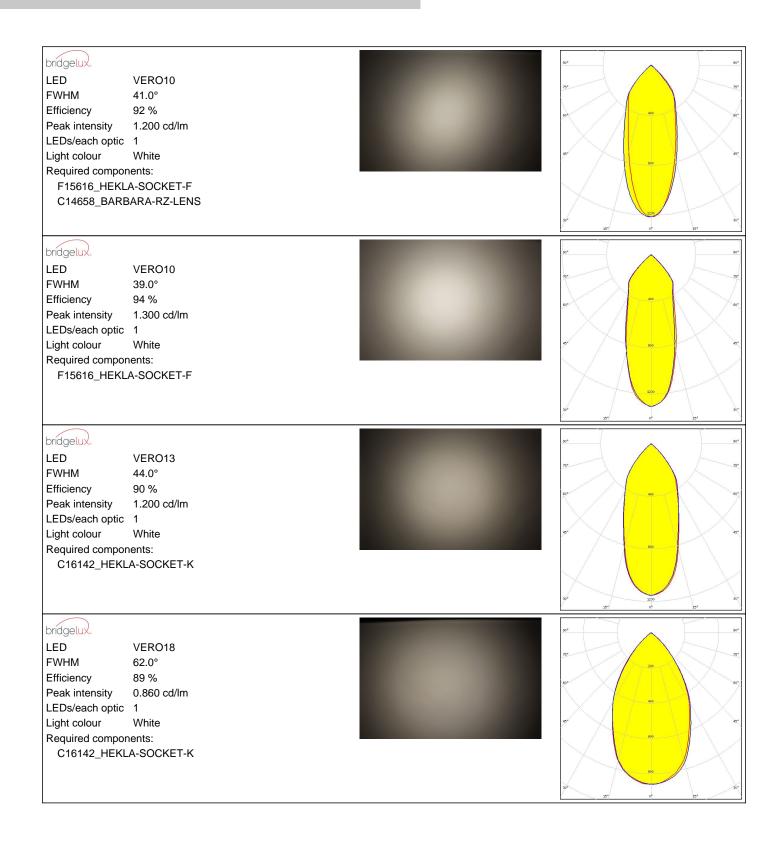

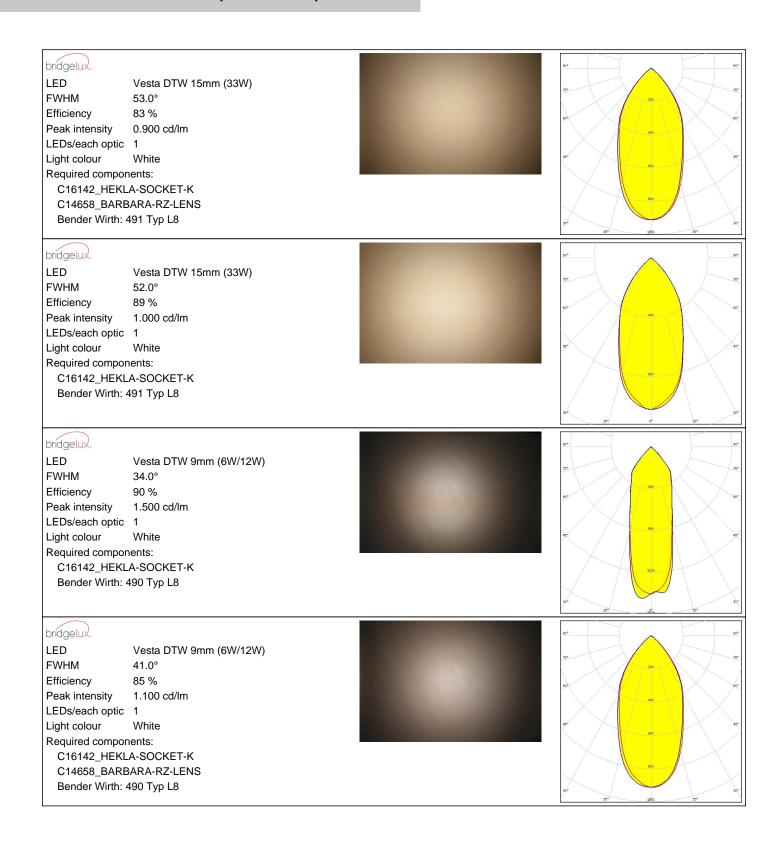

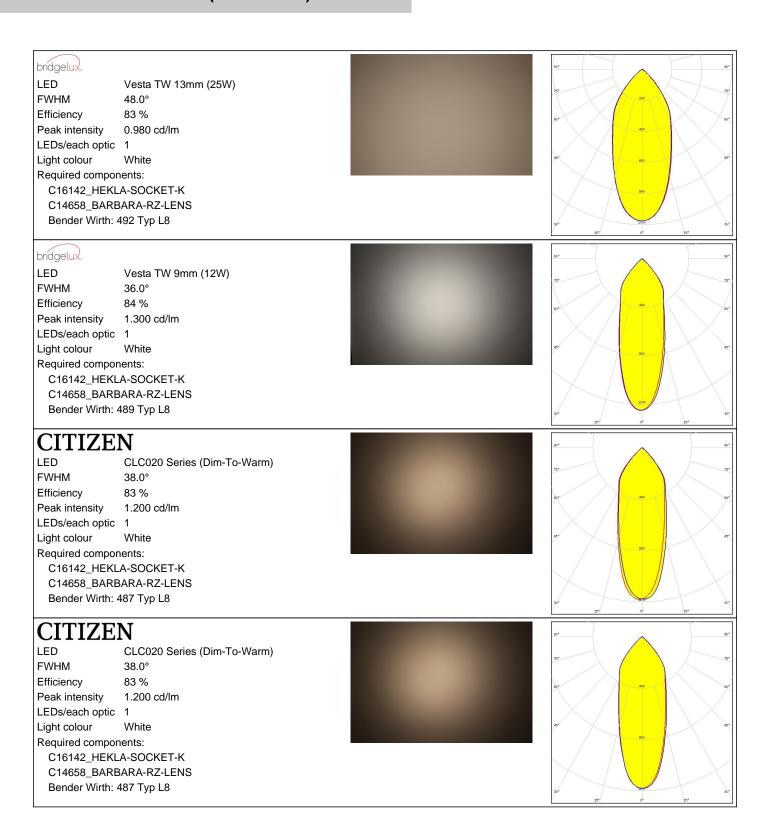

PHOTOMETRIC DATA (MEASURED):

CITIZEN


LED CLC030 Series (Dim-To-Warm)

FWHM 49.0° 87 % Efficiency Peak intensity 1.000 cd/lm LEDs/each optic 1

Light colour White Required components:

C16142_HEKLA-SOCKET-K






CITIZEN


LED CLC030 Series (Dim-To-Warm)

FWHM 53.0° 81 % Efficiency Peak intensity 0.900 cd/lm LEDs/each optic 1

Light colour White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 436 Typ L8






LED CLU700/701 **FWHM** 33.0° Efficiency 90 % Peak intensity 1.400 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS






CITIZEN

CLU700/701 **FWHM** 32.0° Efficiency 94 % 1.500 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components:

F15255_HEKLA-SOCKET-C





PHOTOMETRIC DATA (MEASURED):

CITIZEN


LED CLU7A2 (LES 4.2mm)

FWHM 24.0°
Efficiency 93 %
Peak intensity 1.900 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15255_HEKLA-SOCKET-C






CITIZEN

LED LCN-C01B (Tunable White)

FWHM 38.0°
Efficiency 84 %
Peak intensity 1.200 cd/lm
LEDs/each optic 1
Light colour White

Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8






CITI7FN

LED LCN-C02B (Tunable White)

FWHM 45.0°
Efficiency 88 %
Peak intensity 1.100 cd/lm

LEDs/each optic 1
Light colour White
Required components:
C16142 HEKLA-SOCKET-K





CITIZEN

Light colour


LED LCN-C02B (Tunable White)


White


FWHM 48.0°
Efficiency 83 %
Peak intensity 0.960 cd/lm
LEDs/each optic 1


Required components: C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 481 Typ L8






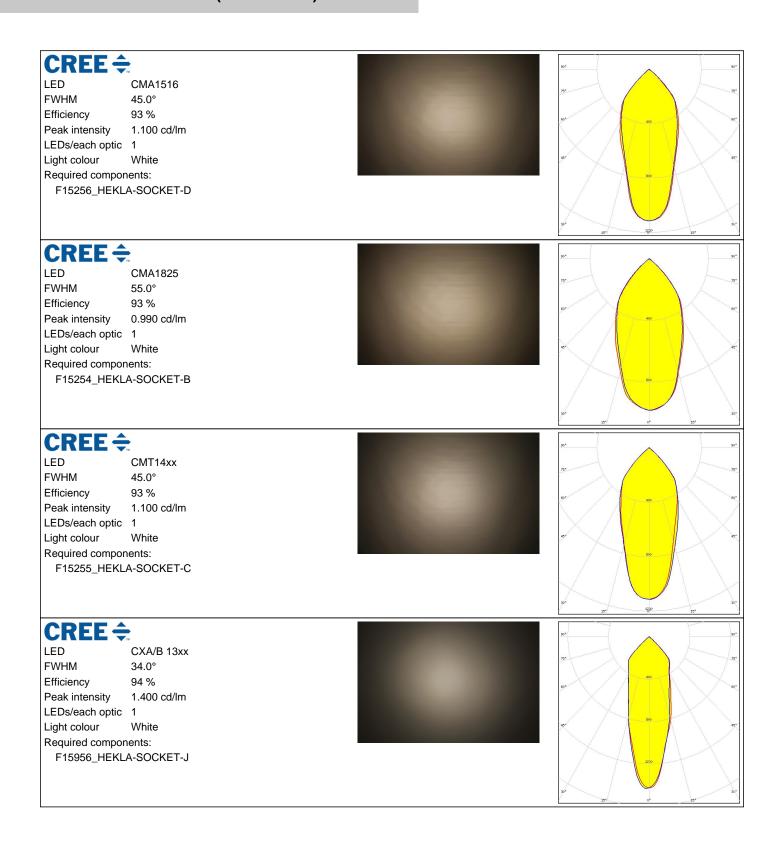

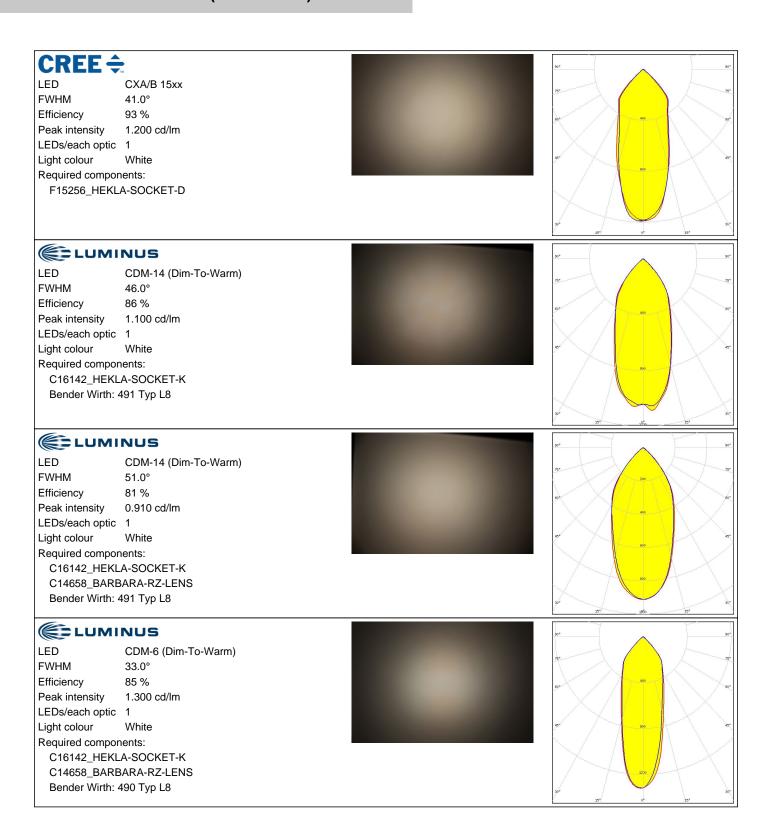

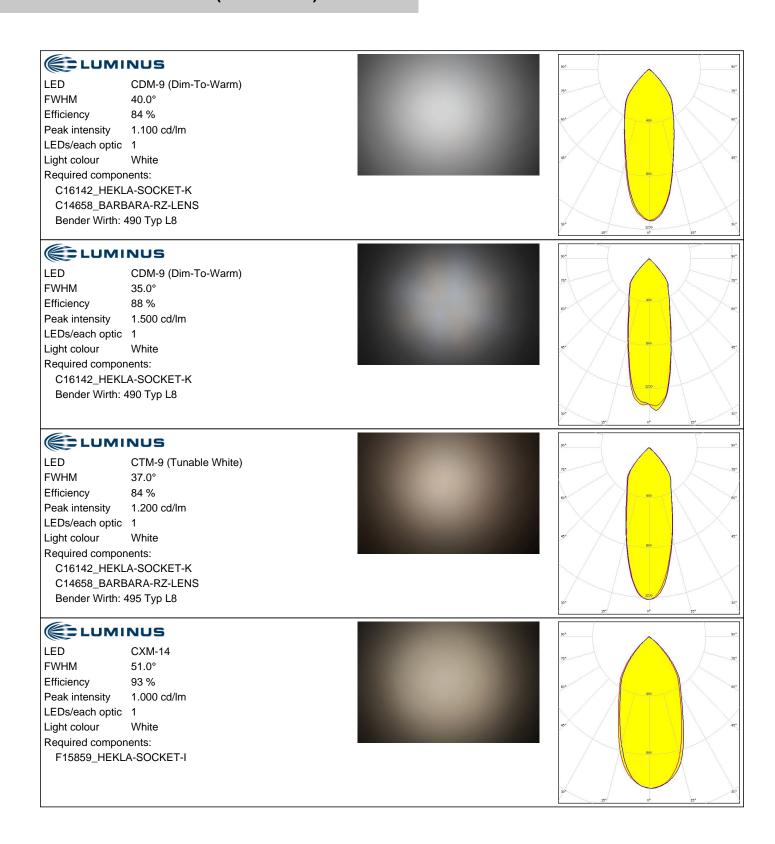



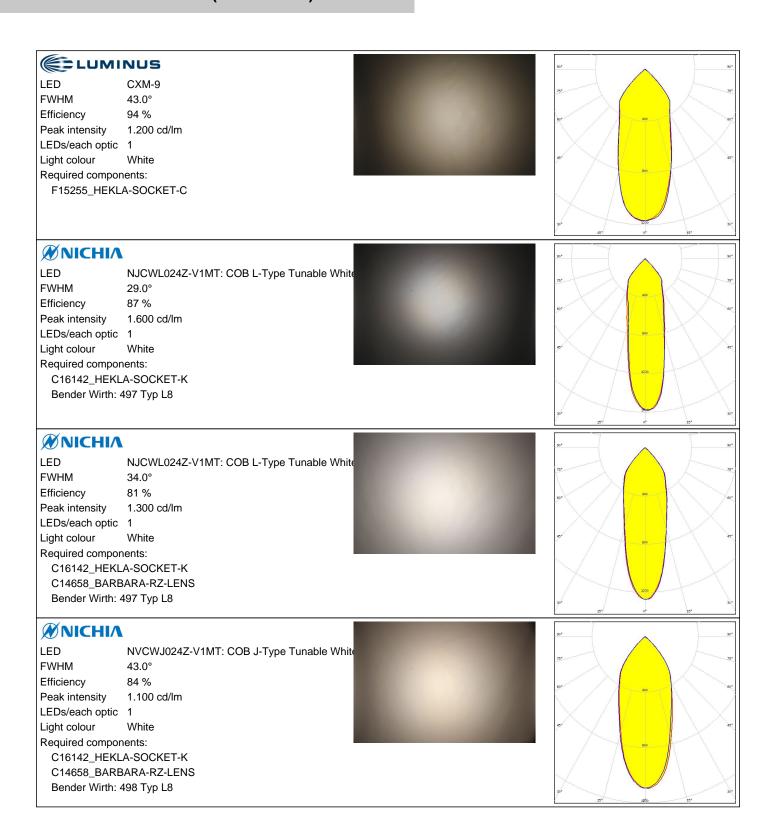



PHOTOMETRIC DATA (MEASURED):


WNICHIA

LED NVCWJ024Z-V1MT: COB J-Type Tunable White

FWHM 39.0° Efficiency 90 % Peak intensity 1.300 cd/lm LEDs/each optic 1

Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 498 Typ L8





PHILIPS


LED Fortimo SLM L09 CoB

FWHM 45.0° Efficiency 94 % Peak intensity 1.140 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H





PHILIPS


LED Fortimo SLM L09 CoB

FWHM 45.0° Efficiency 88 % Peak intensity 1.080 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15858_HEKLA-SOCKET-H C14658_BARBARA-RZ-LENS





PHILIPS

LED Fortimo SLM L13 CoB

FWHM 53.0°
Efficiency 84 %
Peak intensity 0.920 cd/lm

LEDs/each optic 1 Light colour White Required components:

C16142_HEKLA-SOCKET-K C14658_BARBARA-RZ-LENS Bender Wirth: 432 Typ L8



PHOTOMETRIC DATA (MEASURED):

LED Fortimo SLM L13 CoB

FWHM 51.0° 90 % Efficiency Peak intensity 1.000 cd/lm LEDs/each optic 1

Light colour White Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8



LED COB D Series LES 9.8 mm

FWHM 43.0° Efficiency Peak intensity 1.200 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C

SAMSUNG


LED COB D Series LES 9.8 mm

FWHM 44.0° Efficiency 88 % Peak intensity 1.090 cd/lm LEDs/each optic 1

Light colour White Required components: F15255_HEKLA-SOCKET-C

C14658_BARBARA-RZ-LENS






SAMSUNG

LED LC010C G2 **FWHM** 31.0° Efficiency 92 % 1.500 cd/lm Peak intensity

LEDs/each optic 1 White Light colour Required components: F15255_HEKLA-SOCKET-C



PHOTOMETRIC DATA (MEASURED):




LED

MJT COB LES 6

FWHM 32.0°
Efficiency 93 %
Peak intensity 1.500 cd/lm
LEDs/each optic 1
Light colour White

Required components: F15255_HEKLA-SOCKET-C






SEOUL SEMICONDUCTOR

LED MJT COB LES 9.8

FWHM 20.0°
Efficiency 92 %
Peak intensity 3.300 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C






TRIDONIC

LED SLE G1 11mm 1000lm 927 Sunset R EXC

FWHM 50.0° Efficiency 87 % Peak intensity 1.000 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I
C14658_BARBARA-RZ-LENS





TRIDONIC

LED SLE G1 15mm 2000lm 927 Sunset R EXC


FWHM 55.0°
Efficiency 85 %
Peak intensity 0.900 cd/lm
LEDs/each optic 1

Light colour

Required components: F15859_HEKLA-SOCKET-I C14658_BARBARA-RZ-LENS

White





PHOTOMETRIC DATA (MEASURED):

TRIDONIC LED SLE G7 LES09 **FWHM** 41.0° Efficiency 91 % Peak intensity 1.200 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C C14658_BARBARA-RZ-LENS **TRIDONIC** LED SLE G7 LES09 **FWHM** 40.0° 94 % Efficiency Peak intensity 1.200 cd/lm LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C TRIDONIC LED SLE G7 LES13 **FWHM** 52.0° Efficiency 93 % Peak intensity 1.000 cd/lm LEDs/each optic 1 Light colour White Required components: F15859_HEKLA-SOCKET-I **TRIDONIC** LED SLE G7 LES13 **FWHM** 53.0° 86 % Efficiency 0.900 cd/lm Peak intensity LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I C14658_BARBARA-RZ-LENS

PHOTOMETRIC DATA (MEASURED):

TRIDONIC


LED SLE G7 LES15

FWHM 55.0°
Efficiency 93 %
Peak intensity 1.000 cd/lm
LEDs/each optic 1

White

Required components: F15859_HEKLA-SOCKET-I





XICATO

Light colour


LED XTM - 19mm LES

FWHM 62.0°
Efficiency 91 %
Peak intensity 0.870 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C15743_XTM-ADAPTER-50-B





XICATO


LED XTM - 9mm LES

FWHM 41.0° Efficiency 94 % Peak intensity 1.200 cd/lm

LEDs/each optic 1 Light colour White Required components:

C15743_XTM-ADAPTER-50-B





PHOTOMETRIC DATA (SIMULATED):

bridgelux

LED V8 Gen6
FWHM 42.5°
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15253_HEKLA-SOCKET-A

bridgelux.

 LED
 V8 Gen6

 FWHM
 42.5°

 Efficiency
 0 %

 Peak intensity
 0.000 cd/lm

LEDs/each optic 1 Light colour White Required components:


F15253_HEKLA-SOCKET-A

CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 43.0° Efficiency 92 % Peak intensity 1.300 cd/lm

LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C



CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM 45.0° Efficiency 0 % Peak intensity 0.000 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15255_HEKLA-SOCKET-C




PHOTOMETRIC DATA (SIMULATED):

CITIZEN

LED CLL03x/CLU03x

FWHM 47.0° Efficiency 92 % Peak intensity 1.220 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I



CREE 🕏

LED CXA/B 15xx
FWHM 44.0°
Efficiency %
Peak intensity cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15256_HEKLA-SOCKET-D

CREE 💠

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM 46.0°
Efficiency %
Peak intensity cd/lm
LEDs/each optic 1

LEDs/each optic 1
Light colour White
Required components:

F15254_HEKLA-SOCKET-B

CREE 🕏

LED CXA/B 1816 & CXA/B 1820 & CXA 1850

FWHM 46.0° Efficiency 0 % Peak intensity 0.000 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15254_HEKLA-SOCKET-B


PHOTOMETRIC DATA (SIMULATED):

WNICHIA

LED COB T-Type **FWHM** 42.0° 90 % Efficiency Peak intensity 1.420 cd/lm

LEDs/each optic 1 Light colour White Required components:

F15848_HEKLA-SOCKET-G




OSRAM Opto Semiconductors

LED Soleriq S13 Gen2

FWHM 43.8° 93 % Efficiency Peak intensity 1.340 cd/lm


LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I



OSRAM Opto Semiconductors

LED Soleriq S9 **FWHM** 44.3° Efficiency 93 % Peak intensity 1.300 cd/lm

LEDs/each optic 1 Light colour White Required components: F15255_HEKLA-SOCKET-C



SAMSUNG

LED COB D Series LES 14.5 mm

FWHM 49.5° Efficiency 88 % Peak intensity 1.070 cd/lm

LEDs/each optic 1 White Light colour Required components: F15859_HEKLA-SOCKET-I

PHOTOMETRIC DATA (SIMULATED):


TRIDONIC

LED SLE G6 LES10

FWHM 49.0° Efficiency 94 % Peak intensity 1.100 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C




TRIDONIC

LED SLE G6 LES15

FWHM 48.0°
Efficiency 92 %
Peak intensity 1.200 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I




TRIDONIC

LED SLE G6 LES17

FWHM 49.0° Efficiency 92 % Peak intensity 1.160 cd/lm

LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I




XICATO

LED XTM - 9mm LES

FWHM 48.0° Efficiency 93 % Peak intensity 1.220 cd/lm

LEDs/each optic 1
Light colour White
Required components:

C15743_XTM-ADAPTER-50-B





GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy