

FEATURES

1. Continuous short-circuit protection
2. No-load input current as low as 8mA
3. Operating ambient temperature range: -40°C to +105°C
4. High efficiency up to 85%
5. Compact SMD package
6. I/O isolation test voltage 1.5k VDC
7. Industry standard pin-out



3 years
Warranty

Selection Guide

Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load(μF) Max.
	Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.		
B1205XT-2WR3	12 (10.8-13.2)	5	400/40	79/83	2400
B1209XT-2WR3		9	222/22	79/83	1000
B1212XT-2WR3		12	167/17	80/84	560
B1215XT-2WR3		15	133/13	80/84	560
B1224XT-2WR3		24	83/8	81/85	220
B1505XT-2WR3	15 (13.5-16.5)	5	400/40	79/83	2400
B1515XT-2WR3		15	133/13	80/84	560
B2405XT-2WR3	24 (21.6-26.4)	5	400/40	77/83	2400
B2409XT-2WR3		9	222/22	77/83	1000
B2412XT-2WR3		12	167/17	78/84	560
B2415XT-2WR3		15	133/13	78/84	560
B2424XT-2WR3		24	83/8	79/85	220

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	12VDC input	-	196/8	-	mA
	15VDC input	-	161/8	-	
	24VDC input	-	98/8	-	
Reflected Ripple Current*		-	30	-	
Surge Voltage (1sec. max.)	12VDC input	-0.7	-	18	VDC
	15VDC input	-0.7	-	21	
	24VDC input	-0.7	-	30	
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

Note: *Reflected ripple current testing method please refer to DC-DC Converter Application Note for specific operation.

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy		See output regulation curve (Fig. 1)				
Linear Regulation	Input voltage change: ±1%	-	-	±1.2	-	
Load Regulation	10%-100% load	5VDC output	-	7	15	%
		9VDC output	-	6	10	

Load Regulation	10%-100% load	12VDC output	-	5	10	%
		15VDC output	-	4	10	
		24VDC output	-	3	10	
Ripple & Noise*	20MHz bandwidth	-	50	150	mVp-p	
Temperature Coefficient	Full load	-	±0.02	-	%/°C	
Short-circuit Protection		Continuous, self-recovery				

Note:* The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500	-	-	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	-	-	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	-	20	-	pF
Operating Temperature	See Fig. 2	-40	-	105	°C
Storage Temperature		-55	-	125	
Case Temperature Rise	Ta=25°C, nominal input voltage, full load	-	25	-	
Storage Humidity	Non-condensing	5	-	95	%RH
Reflow Soldering Temperature*		Peak temp. Tc≤245°C, maximum duration time≤60s over 217°C			
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	-	260	-	kHz
MTBF	MIL-HDBK-217F@25°C	3500	-	-	k hours
Moisture Sensitivity Level (MSL)	IPC/JEDEC J-STD-020D.1	Level 1			

Note: * See also IPC/JEDEC J-STD-020D.1.

Mechanical Specifications

Case Material	Black plastic; flame-retardant and heat-resistant (UL94V-0)
Dimensions	13.20 x 11.40 x 7.25 mm
Weight	1.4g(Typ.)
Cooling Method	Free air convection

EMC Specifications

Emissions	CE	CISPR32/EN55032 CLASS B		
	RE	CISPR32/EN55032 CLASS B		
Immunity	ESD	IEC/EN61000-4-2	Air ±8kV, Contact ±6kV	perf. Criteria B

Note: Refer to Fig. 4 for recommended circuit test.

Typical Characteristic Curves

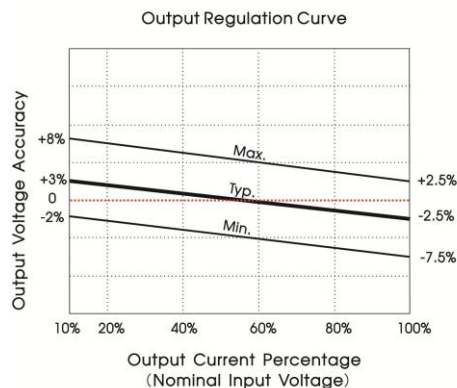


Fig. 1





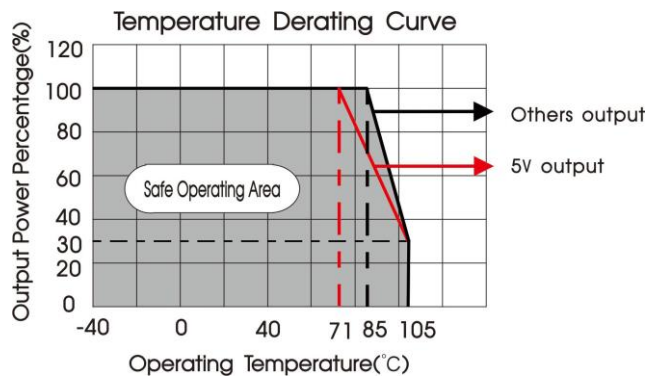


Fig. 2

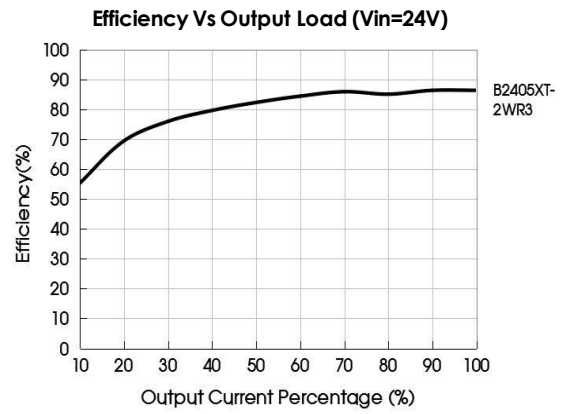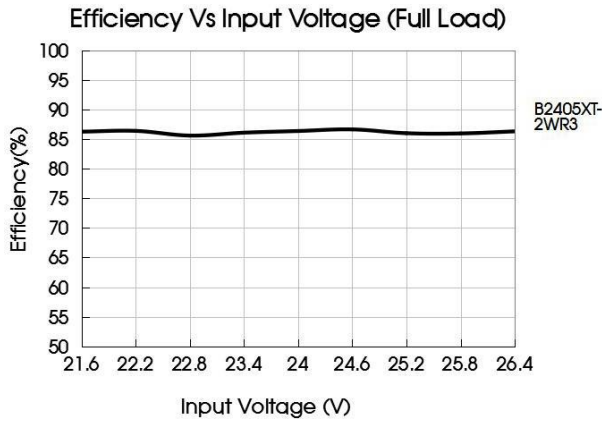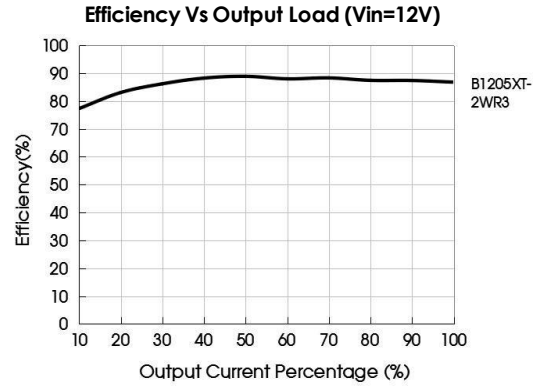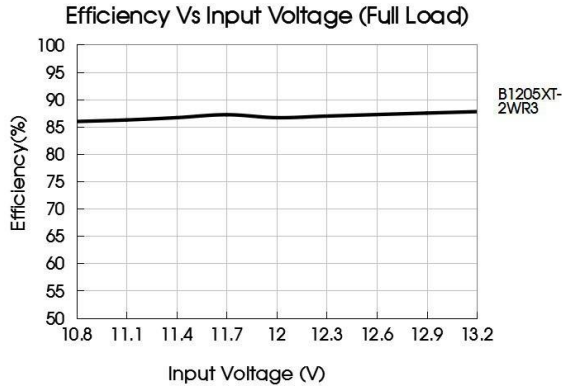

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.




Fig. 3

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
12VDC	2.2μF/25V	5VDC	10μF/10V
15VDC	1μF/25V	9VDC	2.2μF/25V
24VDC	1μF/50V	12VDC	2.2μF/25V
-	-	15VDC	1μF/25V
-	-	24VDC	0.47μF/50V

2. EMC compliance circuit



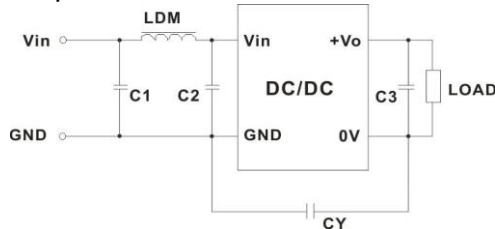


Fig. 4

Emissions	C1, C2	4.7μF /50V
	C3	Refer to the Cout in Fig. 3
	CY	270pF /2kV
	LDM	6.8μH

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

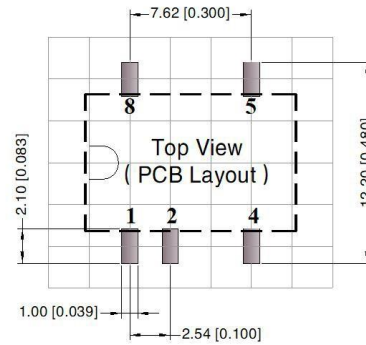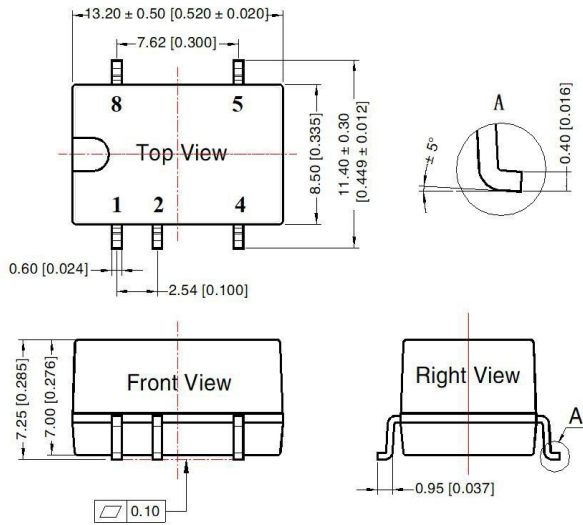

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Mark
1	GND
2	Vin
4	0V
5	+Vo
8	NC

NC: Pin to be isolated from circuitry

Note:
 Unit: mm[inch]
 Pin section tolerances: $\pm 0.10 [\pm 0.004]$
 General tolerances: $\pm 0.25 [\pm 0.010]$

Notes & Instructions

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
2. The maximum capacitive load is tested under the input voltage range and full load condition;
3. Unless otherwise stated, all indexes in this manual are measured at Ta=25°C, humidity <75%RH, nominal input voltage and rated output load;
4. All index testing methods in this manual are based on the enterprise standards of the company;
5. Our company can provide product customization, specific needs can directly contact our technical staff;

NORPAS-POWER TECHNOLOGY CO., LTD.

www.norpas-power.com Mail: info@norpas-power.com

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.norpas-power.com

REV:07/2024