



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

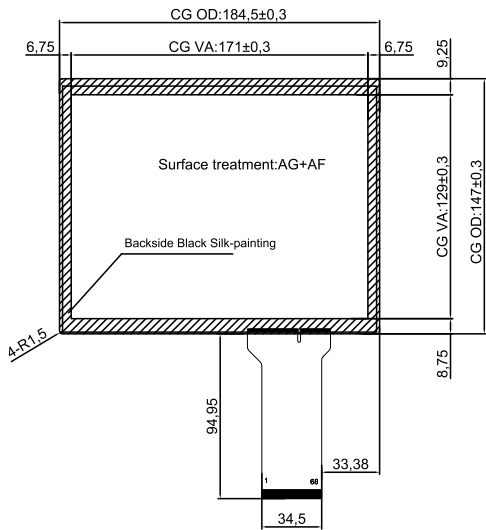



USB PIN ASSIGNMENT	
1	VDD/5V
2	D-
	D+
4	GND

- Technical Datasheet:
- Structure: Cover Glass+SCA+ITO Glass
 - Controller: BTP-GG-CTR-ILI-084B-R04 COB
 - Controller IC: ILI 2511
 - Cover Glass: T=1.1mm,
Surface treatment:AG+AF
Surface hardness: ≥6H
 - Light transmittance: ≥80%
 - Working Temperature: -20℃~+70℃, ≤85%RH;
 - Storage Temperature: -30℃~+80℃, ≤85%RH;
 - Unmarked Tolerance: ± 0.3 mm;
 - All material used conform to RoHS standards

Side View

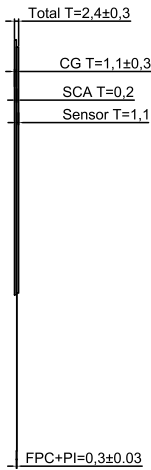

Back View

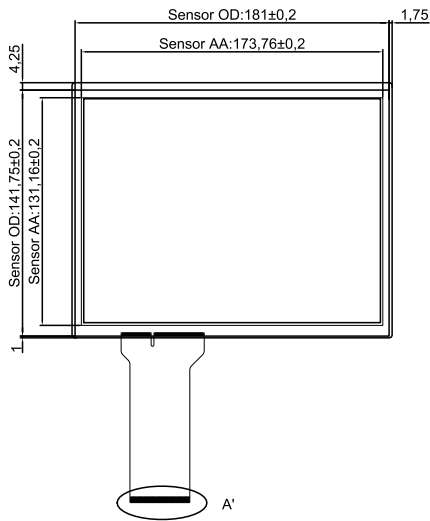

Touch Panel Structure	
TOP	
Cover	1.1mm
SCA	0.2mm
ITO	
Sensor galss	1.1mm
ITO	
BOTTOM	

Designed by:	Curry.Wang
Checked by:	Betty.Fu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.	BTP-GG-TPB-8.4-ILI-R04			
Product Name: 8.4 inch Touch Panel	Drawing No.		G084221101R04	
	Project Code.		G084R04	
Business Unit: SNT-BTP	Period Mark	View Angle	Ratio	
	A		1:1	
BOM Code	1.12.084.02.0104		Page 1	Total 1 Page
Product Series	BTP-GG		思诺泰科创电子（苏州）有限公司 SINOTRONICS INC.	