

STRADA-2X2-CAT-B

Narrow catenary street light beam, optimized for EN13201 M-classes and tilted poles


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	7.7 mm
Fastening	pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	7 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
STRADA-2X2-CAT-B	Multi-lens	PMMA	clear

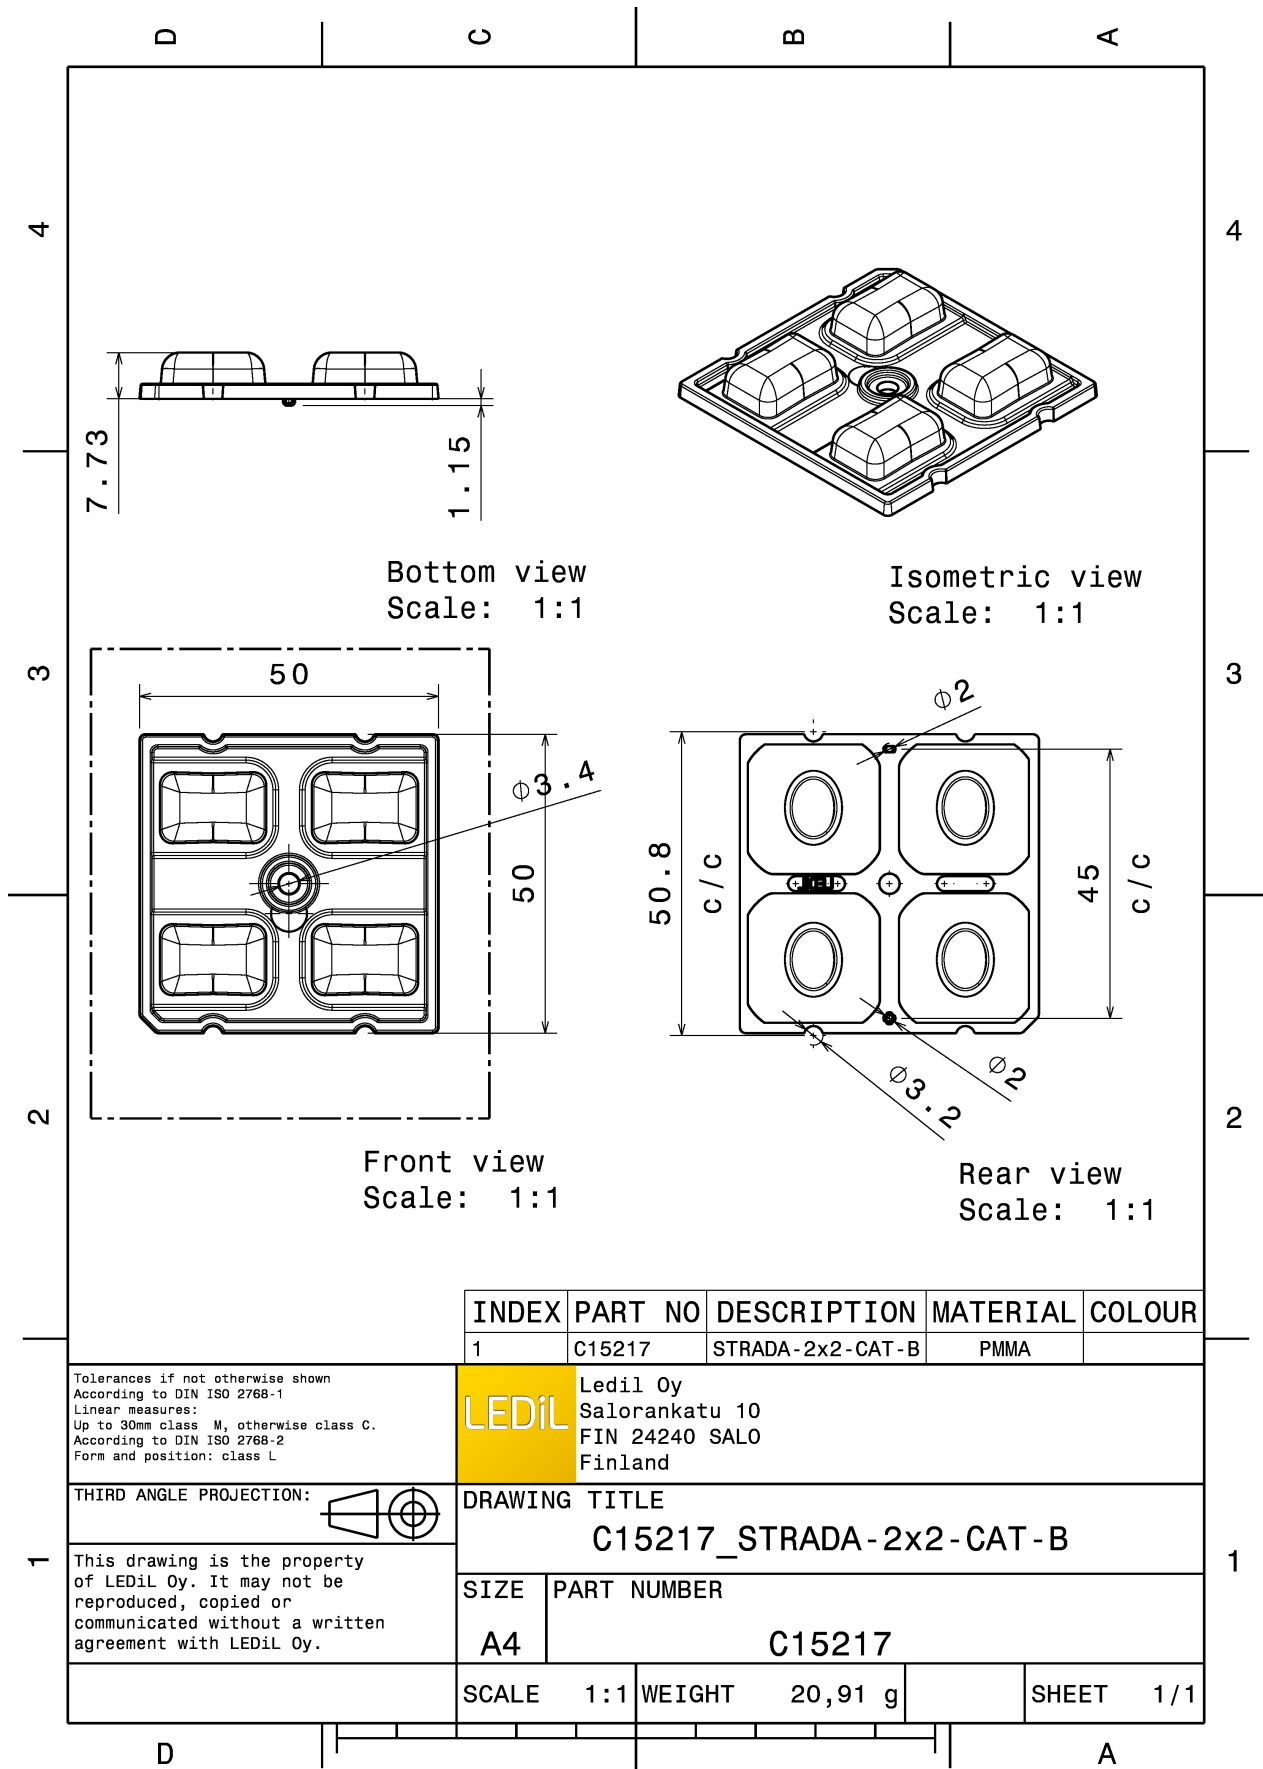

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15217	STRADA-2x2-CAT-B	PMMA	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L



LEDiL Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:

DRAWING TITLE

C15217_STRADA-2x2-CAT-B

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

SIZE PART NUMBER

A4



C15217

SCALE 1:1 WEIGHT 20,91 g SHEET 1/1


PHOTOMETRIC DATA (MEASURED):




LED XD16
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:

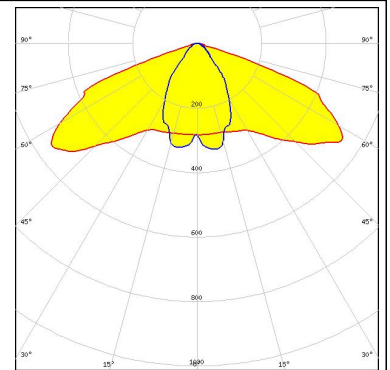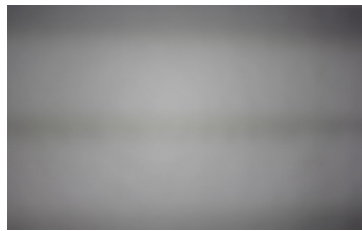


LED XD16
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

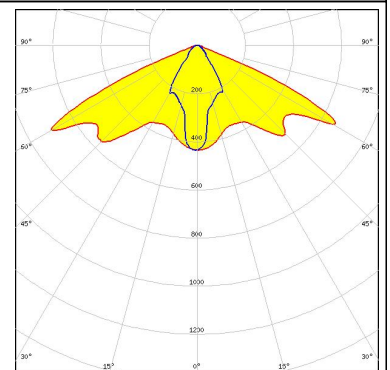

LED XP-G2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

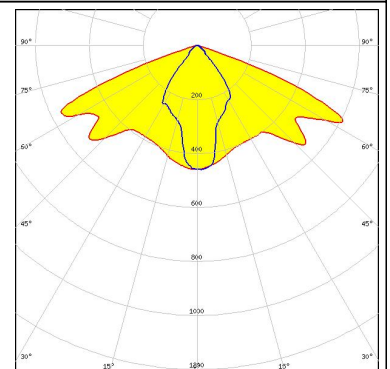


LED LUXEON 5050 Round LES
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.620 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

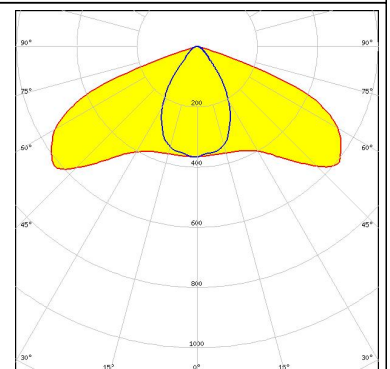

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON V
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.540 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

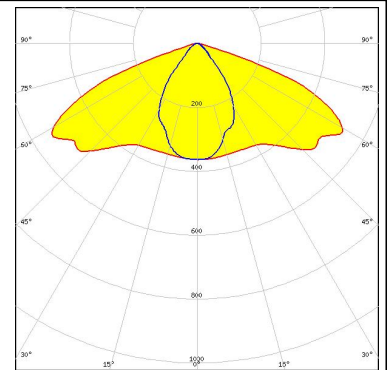


NICHIA

LED NVSW219D
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

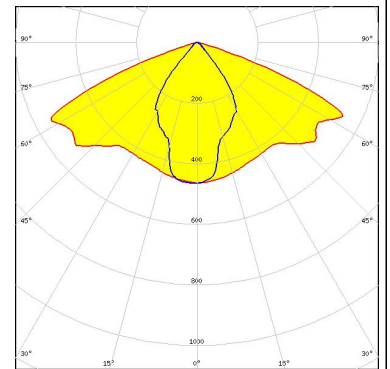


NICHIA

LED NVSW219F
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

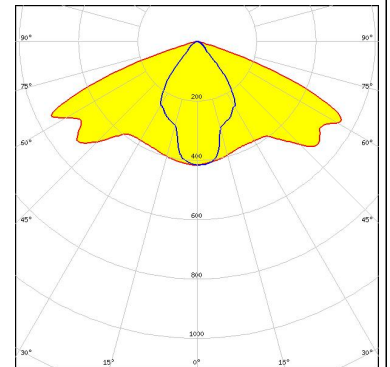

NICHIA


LED NVSW319B
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

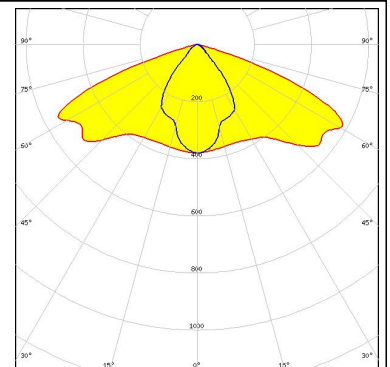


PHOTOMETRIC DATA (MEASURED):



LED NVSW3x9A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

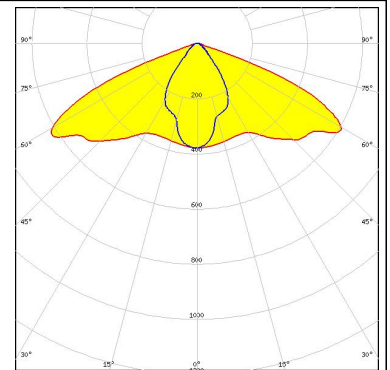


LED NVSxE21A
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.920 cd/lm
LEDs/each optic 1
Light colour White
Required components:

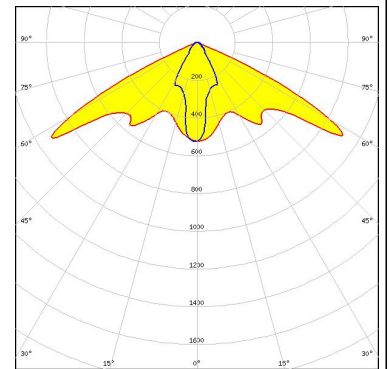


Opto Semiconductors

LED OSLON Square PC
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.620 cd/lm
LEDs/each optic 1
Light colour White
Required components:

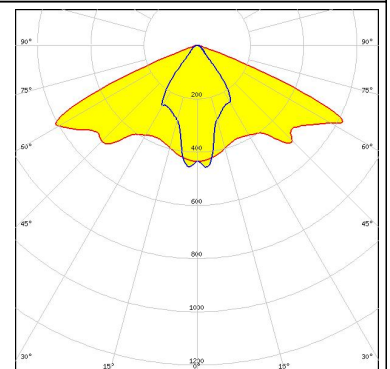


LED Fortimo FastFlex LED 2x8 DA G4
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.610 cd/lm
LEDs/each optic 1
Light colour White
Required components:

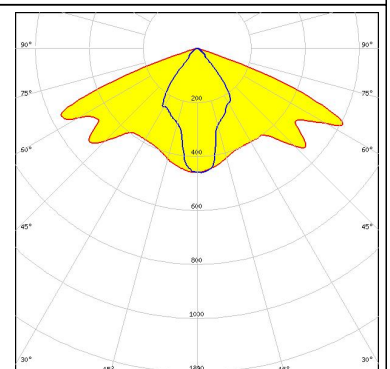

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED HiLOM RH16 (LH351C)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.670 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

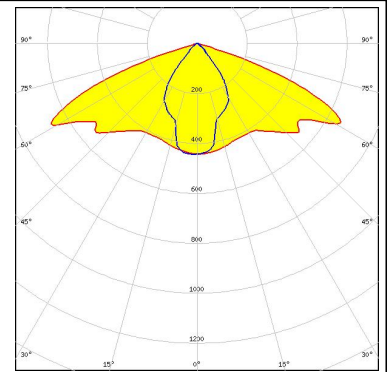


SEOUL SEMICONDUCTOR

LED Z5M3
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.600 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

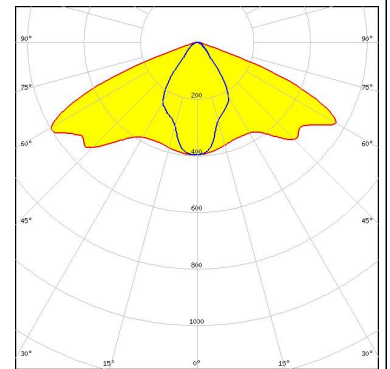

SEOUL SEMICONDUCTOR

LED Z8Y22
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.710 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

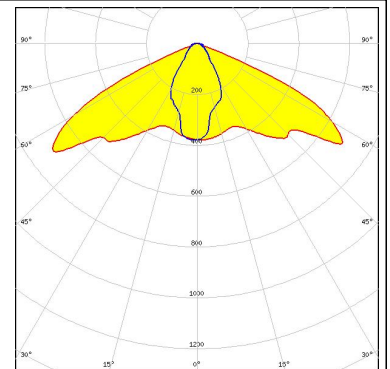


TRIDONIC

LED RLE 2x4 2000lm HP EXC2 OTD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.800 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

PHOTOMETRIC DATA (MEASURED):

TRIDONIC


LED RLE 2x8 4000lm HP EXC2 OTD
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:

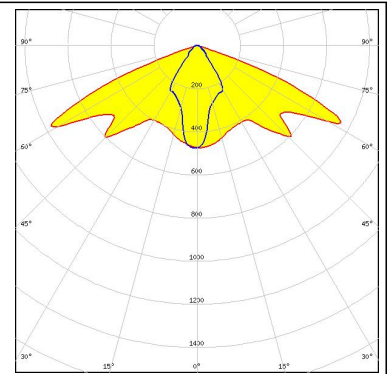


PHOTOMETRIC DATA (SIMULATED):



LED XP-G2 HE
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.488 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

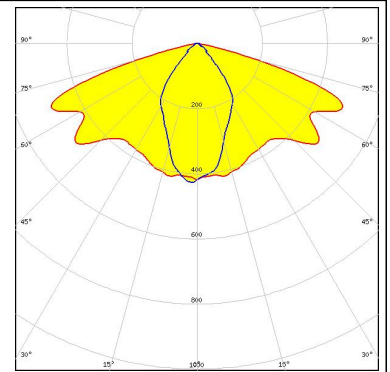


LED XP-G3
 FWHM Asymmetric
 Efficiency 82 %
 Peak intensity 0.445 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

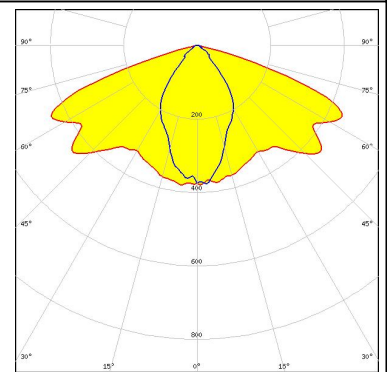


Transparent protective cover







LED XP-G3
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

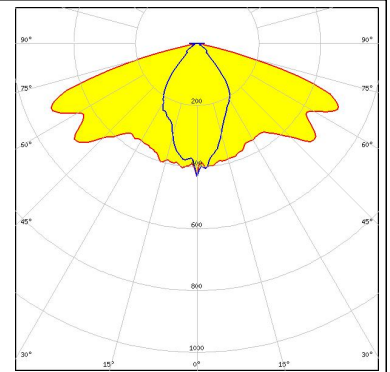

LED XT-E
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

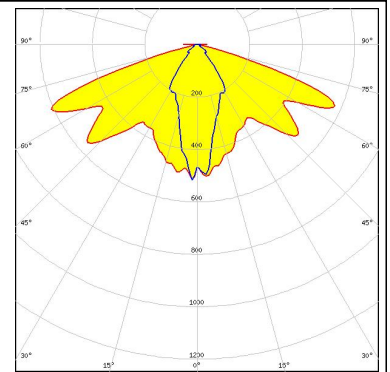

PHOTOMETRIC DATA (SIMULATED):
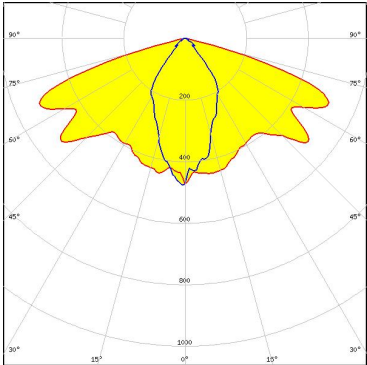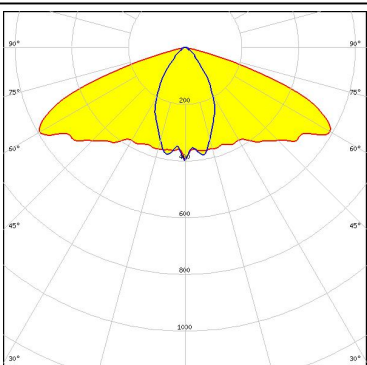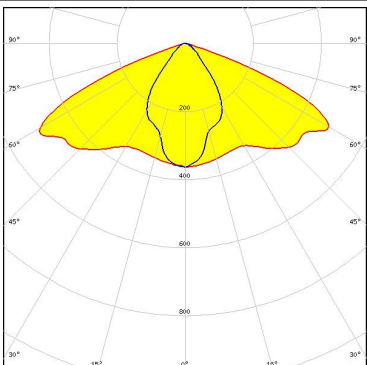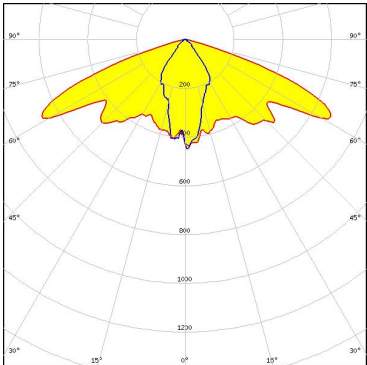
<p>LUMILEDS</p> <p>LED LUXEON V2 FWHM Asymmetric Efficiency 94 % Peak intensity 0.520 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NV4WB35AM FWHM Asymmetric Efficiency 94 % Peak intensity 0.592 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	
<p>NICHIA</p> <p>LED NVSW3x9A FWHM Asymmetric Efficiency 86 % Peak intensity 0.500 cd/lm LEDs/each optic 1 Light colour White Required components:</p> <p>Transparent protective cover</p>	
<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C FWHM Asymmetric Efficiency 88 % Peak intensity 0.680 cd/lm LEDs/each optic 1 Light colour White Required components:</p>	


PHOTOMETRIC DATA (SIMULATED):

OSRAM Opto Semiconductors

LED Duris S8
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.558 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:


OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.590 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

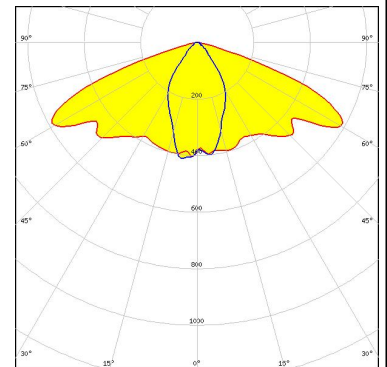

OSRAM Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
 FWHM 140.0 + 35.0°
 Efficiency 84 %
 Peak intensity cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

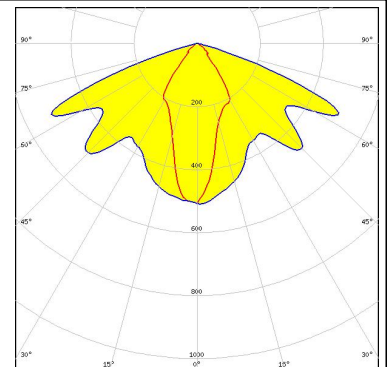

Transparent protective cover

OSRAM Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.680 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

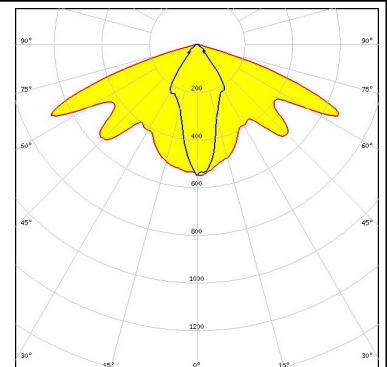

PHOTOMETRIC DATA (SIMULATED):


PHILIPS

LED Fortimo FastFlex LED 2x8 DAX G4
FWHM Asymmetric
Efficiency 93 %
Peak intensity 0.520 cd/lm
LEDs/each optic 1
Light colour White
Required components:

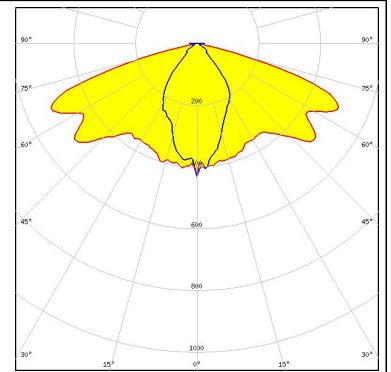

SAMSUNG

LED LH351D
FWHM Asymmetric
Efficiency 90 %
Peak intensity 0.460 cd/lm
LEDs/each optic 1
Light colour White
Required components:

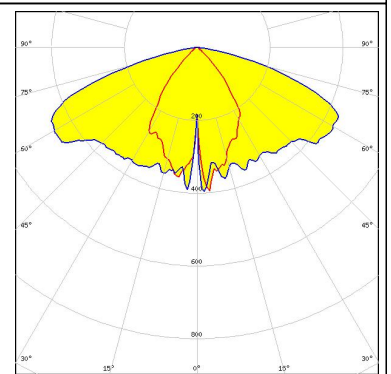

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)