

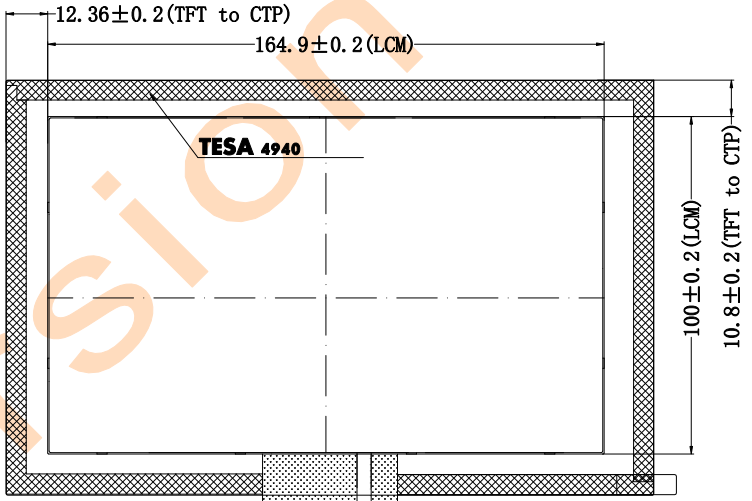
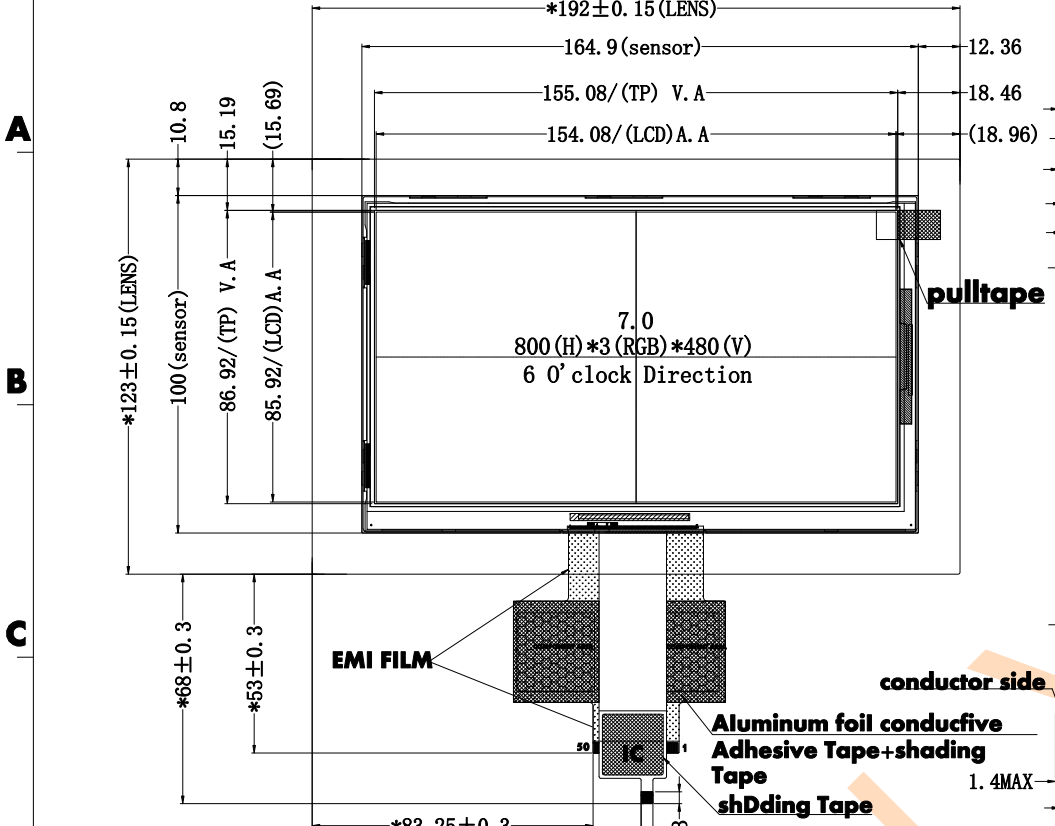


REV.	DRG DATE	DESCRIPTION	DRAWN BY
	2018.6.15	Firt issue	LYY
	2018.6.28	修改了外形宽度	LYY

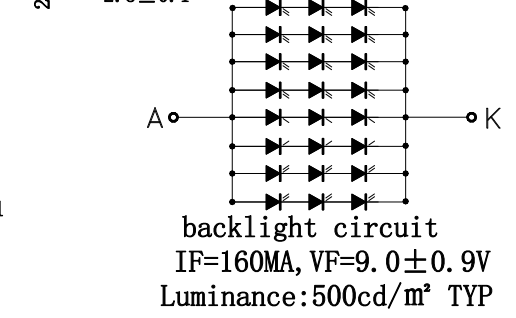

PIN	DEFINE
1	GND
2	VDD
3	VDD
4	VCC
5	VCC
6	PWM
7	GND
8	RO
9	R1
10	R2
11	R3
12	GND
13	R4
14	R5
15	R6
16	R7
17	GND
18	G0
19	G1
20	G2
21	G3
22	GND
23	G4
24	G5
25	G6
26	G7
27	GND
28	B0
29	B1
30	B2
31	B3
32	GND
33	B4
34	B5
35	B6
36	B7
37	GND
38	HS
39	VS
40	GND
41	DE
42	GND
43	DCLK
44	GND
45	CSX
46	SDA
47	SCL
48	STBYB
49	RESET
50	GND

- Notes:**
1. Display Mode: 16.7M TFT/Normally White
  2. Viewing Angle: 6 o'clock
  3. LCD Driver IC: EK9713CA+EA73002ACGB
  4. CTP: 结构G+G
  5. CTP: IC FT5426
  6. Operating Temp:  $-20^{\circ}C \sim +70^{\circ}C$
  7. Storage Temp:  $-30^{\circ}C \sim +80^{\circ}C$
  8. \*: Critical Dimension, ( ): Reference Dimension
  9. Undefined Tolerance:  $\pm 0.2$
  10. Requirements on Environmental Protection: ROHS
  11. Power Supply for Backlight Driver: 4-7V (typ 5V)

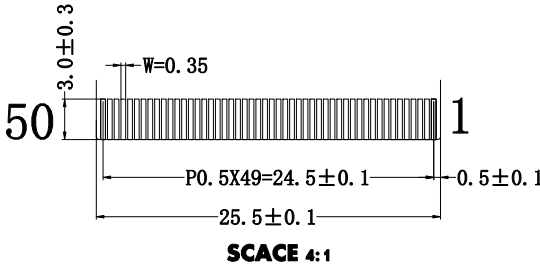

PIN	DEFINE
1	TPGND
2	TPVDD
3	SCL
4	SDA
5	INT
6	RESET

<b>FRIDA</b> 深圳市福瑞达显示技术有限公司 Shenzhen Frida LCD Co., Ltd		DRG DATE	2018.6.15	
		DRAWING	LYY	
TITLE.	REV.	UNIT	SIZE	(3)
MODEL.	FRD700N50041-A-CTK	mm	A4	
		CHECK		
		APPROVE		