
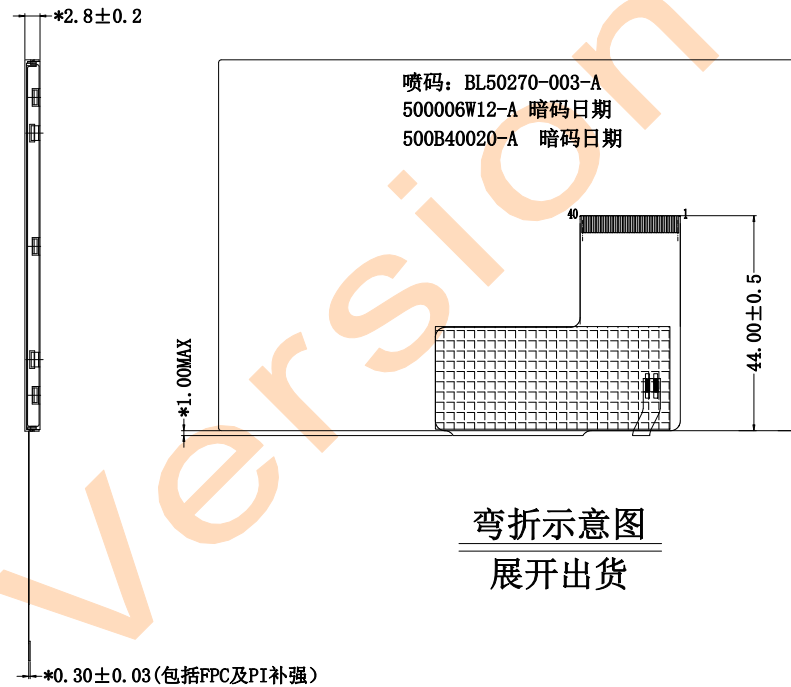


**RoHS**

NO.	CONTENT	DRAWN DATE
1	First Issue	Wang Jin 20171111
2		
3		
4		

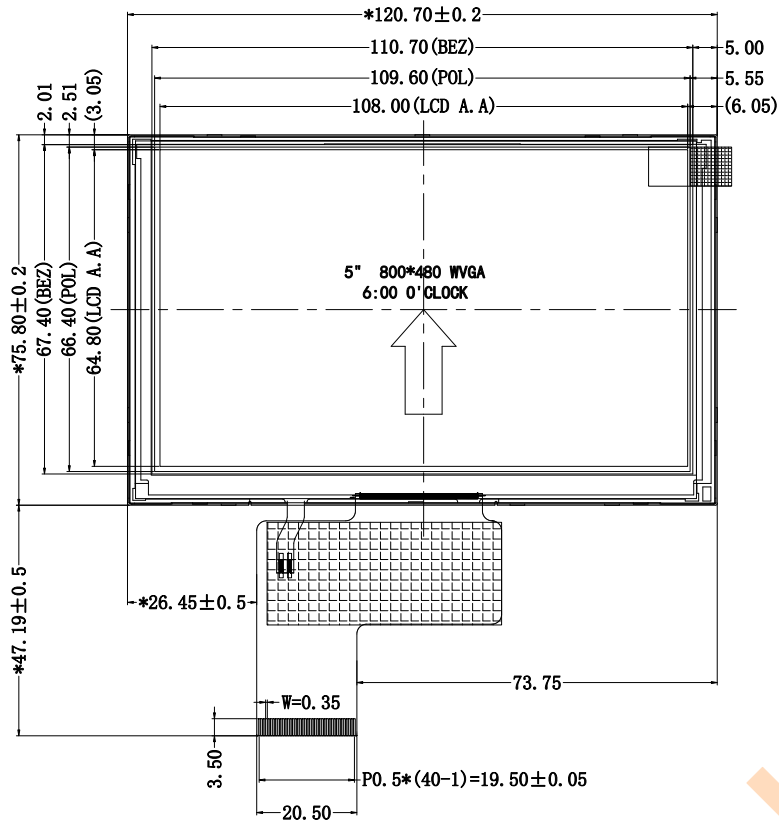


No	PIN NAME
1	LED-
2	LED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	DGND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

**Notes:**

1. Display Mode: 262K TFT/Normally White
2. Viewing Angle: 6 0' clock
3. LCD Driver IC: HX8264-D05DPD400/HX8664-B00H(B) PD400
4. Operating Temp: -10°C ~ +60°C
5. Storage Temp: -20°C ~ +70°C
6. \*: Critical Dimension, ( ): Reference Dimension
7. Undefined Tolerance: ±0.2
8. Requirements on Environmental Protection: ROHS

Circuit Diagram:



IF=40MA, VF=18±1.8V

		深圳市福瑞达显示技术有限公司 Shenzhen Frida LCD Co., Ltd			Page	1/1
					DRAWING	Wang Jin
TITLE.	LCM	REV.	UNIT	SIZE	CHECK	
MODEL.	FRD500B40020-Q	v0	mm	<b>A4</b>	APPROVE	