


FEATURES

1. Wide 2:1 input voltage range
2. High efficiency up to 92%
3. I/O isolation test voltage 1.5k VDC
4. Input under-voltage protection, output short circuit, over-current, over-voltage protection
5. Operating ambient temperature range: -40°C to +105°C
6. No-load power consumption as low as 0.048W Six-sided metal shielding package
7. Industry standard pin-out

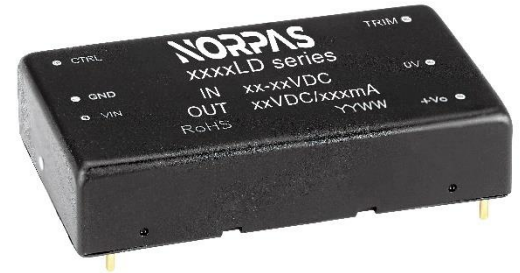

3 years
Warranty

Selection Guide

Part No.	Input Voltage (VDC)		Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load (μF)Max.
	Nominal (Range)	Max.	Voltage (VDC)	Current(mA) Max./Min.		
MFB4803LD-50W(H)R3	48 (36-75)	80	3.3	10000/0	89/91	27000
MFB4805LD-50W(H)R3			5	10000/0	89/91	18900
MFB4812LD-50W(H)R3			12	4167/0	90/92	3700
MFB4815LD-50W(H)R3			15	3333/0	90/92	2000
MFB4824LD-50W(H)R3			24	2083/0	90/92	1000

Note:
 ①Use "H" suffix for heat sink mounting, We recommend to choose modules with a heat sink for enhanced heat dissipation and applications with extreme temperature requirements;
 ②Exceeding the maximum input voltage may cause permanent damage;
 ③Efficiency is measured at nominal input voltage and rated output load;

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no-load)	Nominal input voltage	3.3V output	--	756/1	773/--	mA
		5V output	--	1145/2	1171/--	
		12V output	--	1133/4	1158/--	
		15V output	--	1133/4	1158/--	
		24V output	--	1133/3	1158/--	
Surge Voltage (1sec. max.)		-0.7	--	80	VDC	
Start-up Voltage		--	--	36		
Input Under-voltage Protection		26	30	--		
Start-up Time	Nominal input voltage & constant resistance load	--	10	120	ms	

Input Filter		PI filter			
Hot Plug		Unavailable			
Ctrl*	Module on	Ctrl pin open or pulled high (TTL 3.0-12VDC)			
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)			
	Input current when off	--	2	12	mA
Note: *The Ctrl pin voltage is referenced to input GND.					

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load		--	±1	±3	%
Linear Regulation	Input voltage variation from low to high at full load		--	±0.2	±0.5	
Load Regulation	5%-100% load		--	±0.5	±1	
Transient Recovery Time	25% load step change, nominal input voltage		--	250	500	µs
Transient Response Deviation	25% load step change, input voltage range	3.3V/5V output	--	±3	±8	%
		others	--	±3	±5	
Temperature Coefficient	Full load		--	--	±0.03	%/°C
Ripple & Noise*	20MHz bandwidth, 5%-100% load	3.3V/5V output	--	170	200	mV p-p
		12V/15V output	--	200	250	
		24V output	--	180	350	
Trim	Input voltage range		90	--	110	%Vo
Over-voltage Protection			110	140	160	
Over-current Protection			110	140	200	%Io
Short Circuit Protection			Continuous, self-recovery			
Note: *The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.						

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC	
	Input/output-Housing Electric Strength Test for 1 minute with a leakage current of 1mA max.	1000	--	--		
Insulation Resistance	Input-output resistance at 500VDC	100	--	--	MΩ	
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	2200	--	pF	
Operating Temperature	See Fig. 1	-40	--	+105	°C	
Storage Temperature		-55	--	+125		
Storage Humidity	Non-condensing	5	--	95	%RH	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C	
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z				
Switching Frequency *	PWM mode	--	300	--	kHz	
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours	
Note: *Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.						

Mechanical Specifications


Case Material	Aluminum alloy		
Dimensions	Without heat sink	Horizontal package	50.80 × 25.40 × 11.80 mm
	With heat sink	Horizontal package	51.40 × 26.20 × 16.50 mm
Weight	Without heat sink	Horizontal package	39g/62g/82g (Typ.)
	With heat sink	Horizontal package	47g/70g/90g (Typ.)
Cooling Method	Free air convection		

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig.3-2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig.3-2 for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6kV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	100kHz ±2kV (see Fig.3-1 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.3-1 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A

Typical Characteristic Curves

3.3V/5V output

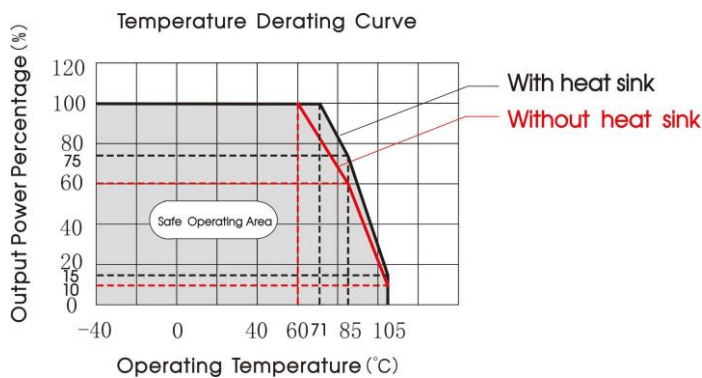

12V/15V/24V output

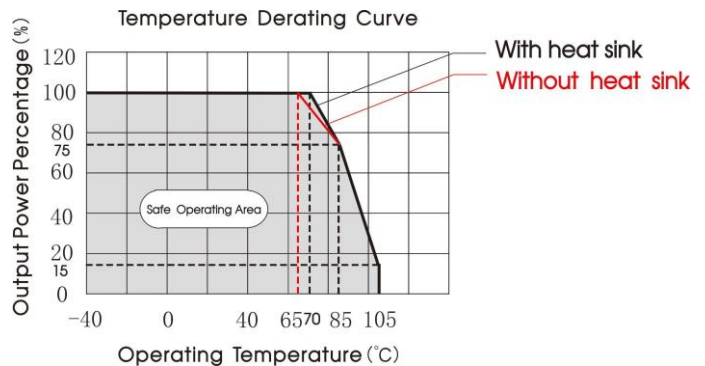


Fig. 1

Design Reference

1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.



Fig. 2

Vout (VDC)	Cin (μF)	Cout (μF)
3.3	200μF/100V	470μF/10V
5	100μF/100V	470μF/10V
12/15		100μF/25V
24		47μF/50V

2. EMC compliance circuit

Parameter description:


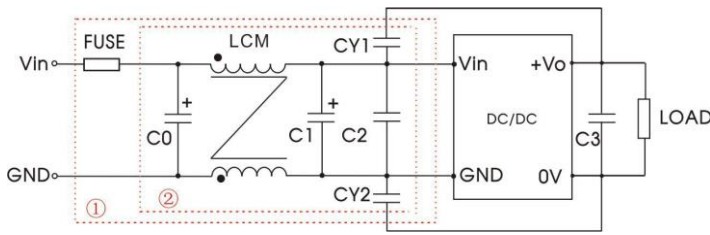


Fig. 3

Note: We use Part ① in Fig. 3 for Immunity tests and Part ② for Emissions test. Selecting based on needs.

Model	Vin: 48V
FUSE	T/2A/250VAC
C0	330µF/100V
LCM	2.2Mh
C1	330µF/100V
C2	2.2µF/100V
CY1, CY2	Y1 Safety capacitor 3.3nF/250VAC
C3	Refer to the Cout in Fig.2

3. Trim Function for Output Voltage Adjustment (open if unused)

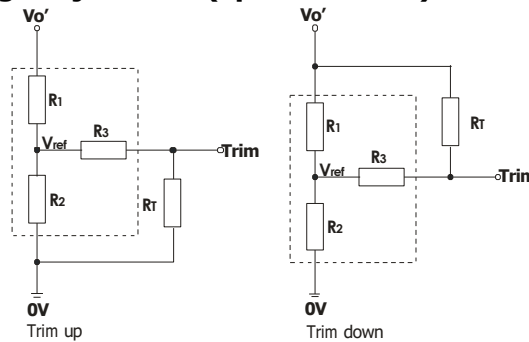

TRIM resistor connection (dashed line shows internal resistor network)

Calculating Trim resistor values:

$$\begin{aligned} \text{up: } R_T &= \frac{aR_2}{R_2 - a} - R_3 & a &= \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1 \\ \text{down: } R_T &= \frac{aR_1}{R_1 - a} - R_3 & a &= \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \\ \text{down: } R_T &= \frac{aR_1}{R_1 - a} - R_3 & a &= \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2 \end{aligned}$$


R_T is Trim resistance

a is a self-defined parameter, with no real meaning.

Vout(V)	Vout adjustable value(V)	RT(kΩ)	R1(kΩ)	R2(kΩ)	R3(kΩ)	Vref(V)
3.3	Up: 3.63	10	4.83	2.87	10	1.24
	Down: 2.97	13.5	4.83	2.87	10	1.24
5	Up: 5.5	4.3	2.87	2.87	10	2.5
	Down: 4.5	1.5	2.87	2.87	10	2.5
12	Up: 13.2	7.6	10.90	2.87	15	2.5
	Down: 10.8	60.7	10.90	2.87	15	2.5
15	Up: 16.5	8.9	14.35	2.87	15	2.5
	Down: 13.5	90.2	14.35	2.87	15	2.5
24	Up: 26.4	21.6	24.77	2.87	5.1	2.5
	Down: 21.6	185.9	24.77	2.87	5.1	2.5

4. The products do not support parallel connection of their output

MFB48_LD-50WR3 Dimensions and Recommended Layout

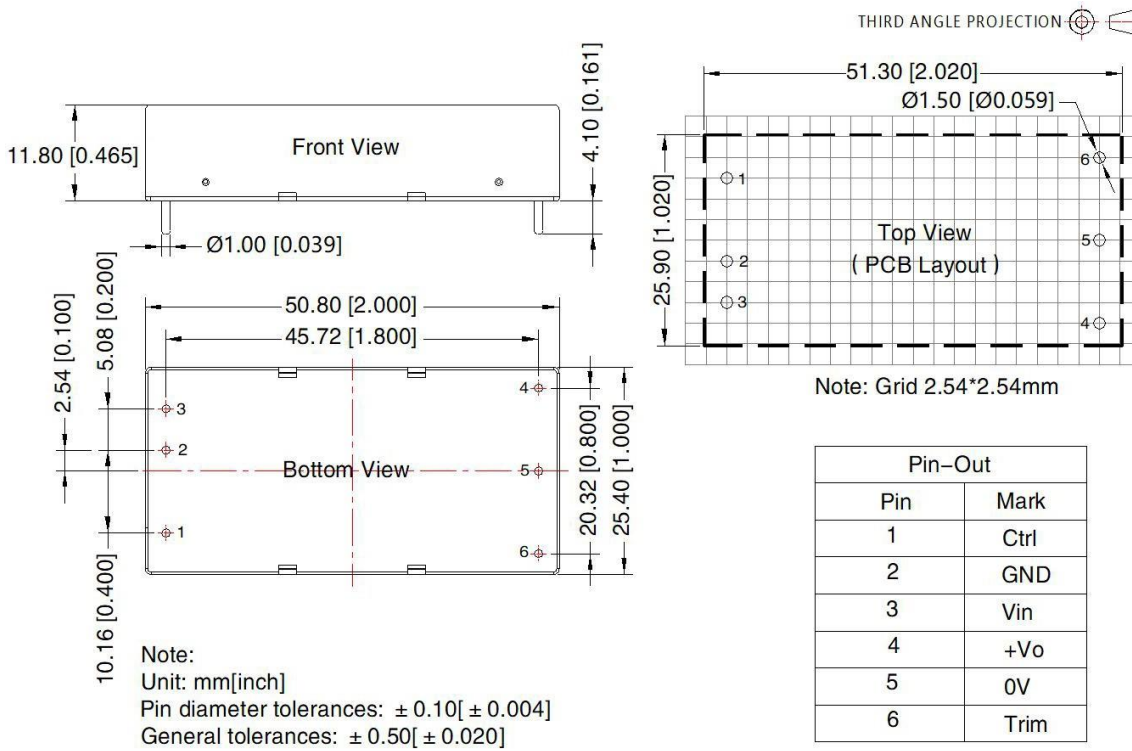

MFB48_LD-50WHR3 Dimensions and Recommended Layout

