
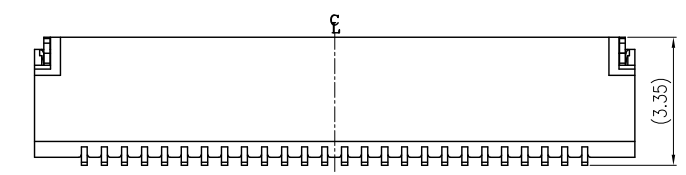

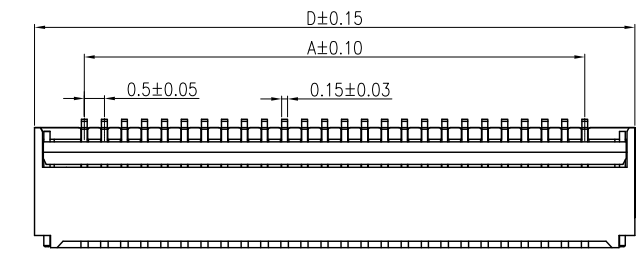





REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2021.02.24	钟建虾
02	▲	增加颜色代码	2021.08.05	钟建虾

Specifications
 Current Rating:0.5 AMPS
 voltage Rating:50V,AC DC
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:40mΩ Max.
 Operating Temperature:-40°C to +85°C


Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

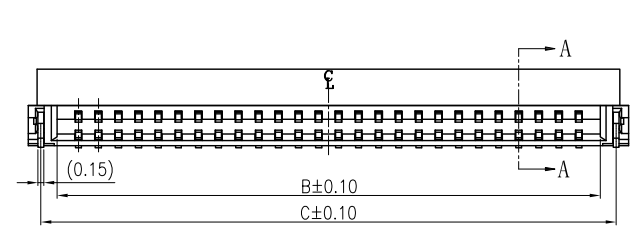

N: 孔位

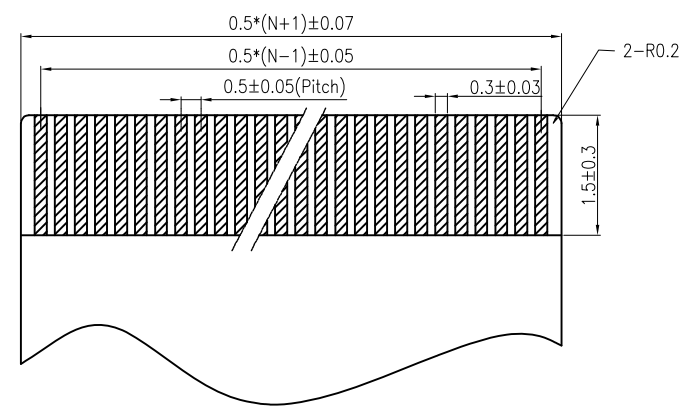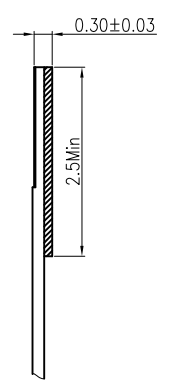

适用FFC寸法
 APPLICABLE FFC

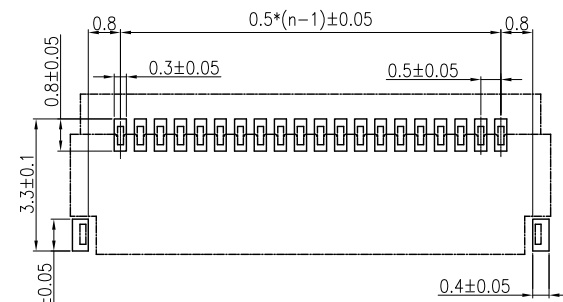

适用PCB布局
 RECOMMENDED PCB LAYOUT

Ordering Information

C FAD102 - XX XX A 052 C X S X
 No. of Pins per Row SEE TABLE
 Standard Plating 09=Gold 3u*
 Selective Plating 02=Gold Flash
 Color 1=Black 2=White
 Standard Packing D=Tape&Reel Selective Packing

TABLE:

No. of PIN/ROW	Dimension Information			
	A	B	C	D
04	1.50	2.55	3.36	4.1
06	2.50	3.55	4.36	5.1
08	3.50	4.55	5.36	6.1
10	4.50	5.55	6.36	7.1
12	5.50	6.55	7.36	8.1
13	6.0	7.05	7.86	8.6
14	6.50	7.55	8.36	9.1
16	7.50	8.55	9.36	10.1
18	8.50	9.55	10.36	11.1
20	9.50	10.55	11.36	12.1
24	11.50	12.55	13.36	14.1
26	12.50	13.55	14.36	15.1
30	14.50	15.55	16.36	17.1
33	16.0	17.05	17.86	18.6

Greenconn
 Website: www.greenconn.com
 E-mail: sales@greenconn.com

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.*±/	X.±/
.X'±/	.X±0.30
.XX'±/	.XX±0.25
.XXX'±/	.XXX±0.15

DESIGNED: 钟建虾 DATE: 2021.08.05
 CHECKED: LINK DATE: 2021.08.05
 APPROVED: LINK DATE: 2021.08.05

DWG. NO. CFAD102-CA52CS
 PART NO. CFAD102-XXXXA052CX SX

TITLE. PH0.5 FPC H=1.14 90° SMT Type