

Data sheet

OpDAT REGpro front cover 3RU, 7HP 6xSC-D OS2 (ceramic, metal)

P/N
15024AD206-E


EAN 4250184170792

2018-06-03

Illustrations



Dimensional drawing

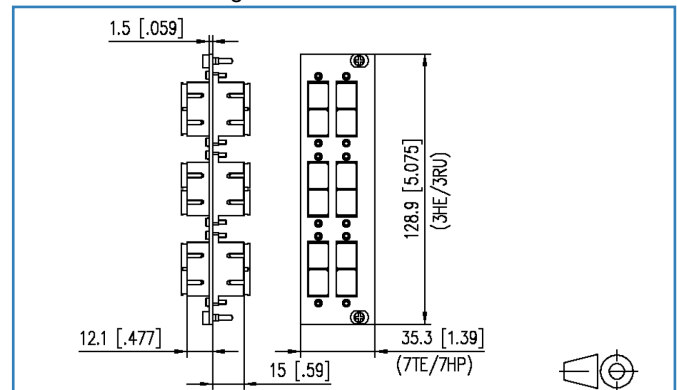

See enlarged drawings at the end of document

Product specification

- front plate 3RU/7HP with 6 SC-D adapters
- slotted ceramics sleeve for single mode and multimode applications
- suitable for mounting in OpDAT REGpro and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with SC-D-adapters each metal or blue (OS2), violet (OM4), aqua (OM3), beige (OM2) or green (OS2 APC)
- front plate 3RU/7HP LC-Q adapters
- slotted ceramics sleeve for single mode and multi mode applications
- suitable for mounting in OpDAT REGpro24 and OpDAT REG S
- gray, powder-coated steel sheet
- variants: equipped with 3 or 6 LC-Q adapters, each in blue (OS2), violet (OM4), aqua (OM3) or LC-Q APC adapters, each in green (OS2)



Technical Data

General Data

Fields of application

Structured building cabling, Office
Data center

Design Front cover

Mounting style 3RU/7HP

Transmission technology Fiber optic

Color metallike

Dimensions

Dimension (L x W x H) 28.60 x 128.90 x 35.30 mm

Dimension (L x W x H) 1.126 x 5.075 x 1.39 in.

Height unit 3RU

Horizontal pitch 7Units

Mode type of the fiber Single mode

Fiber construction 9/125 µm

Connections/interfaces

Connector technology interface 1 SC-D Couplers

Connector technology interface 2 SC-D Couplers

Number of ports interface 1 6

Number of ports interface 2 6

Number of equipped ports interface 1 6

Number of equipped ports interface 2 6

Number of ports with dust protection interface 1 6

Number of ports with dust protection interface 2 6

Mechanical characteristics

Cut-out SC-D, LC-Q, ST-D

Connector type Duplex

Life - Number of mating cycles min. 1000

Materials and material properties

Material - Mounting plate steel

Material - Mounting plate finish powder-coated

Material - Sleeve ceramic, slotted

Material - Coupler housing Plastics



Technical Data

Approvals

RoHS compliant

The product meets the following standards

Fibre optic connector interfaces DIN EN 61754-4

Classifications

ETIM 5.0 EC001130

ETIM 6.0 EC001130

Packing details

Type of packaging 1 pc(s) / plastic bag

Packaging unit - Weight (gram) 168.00 g

Packaging unit - Weight (pound) 0.37 lb


Packaging dimension (W x H x D) 300.00 x 200.00 x 50.00 mm

Packaging dimension (W x H x D) 11.811 x 7.874 x 1.969 in.



Illustrations

Dimensional drawing

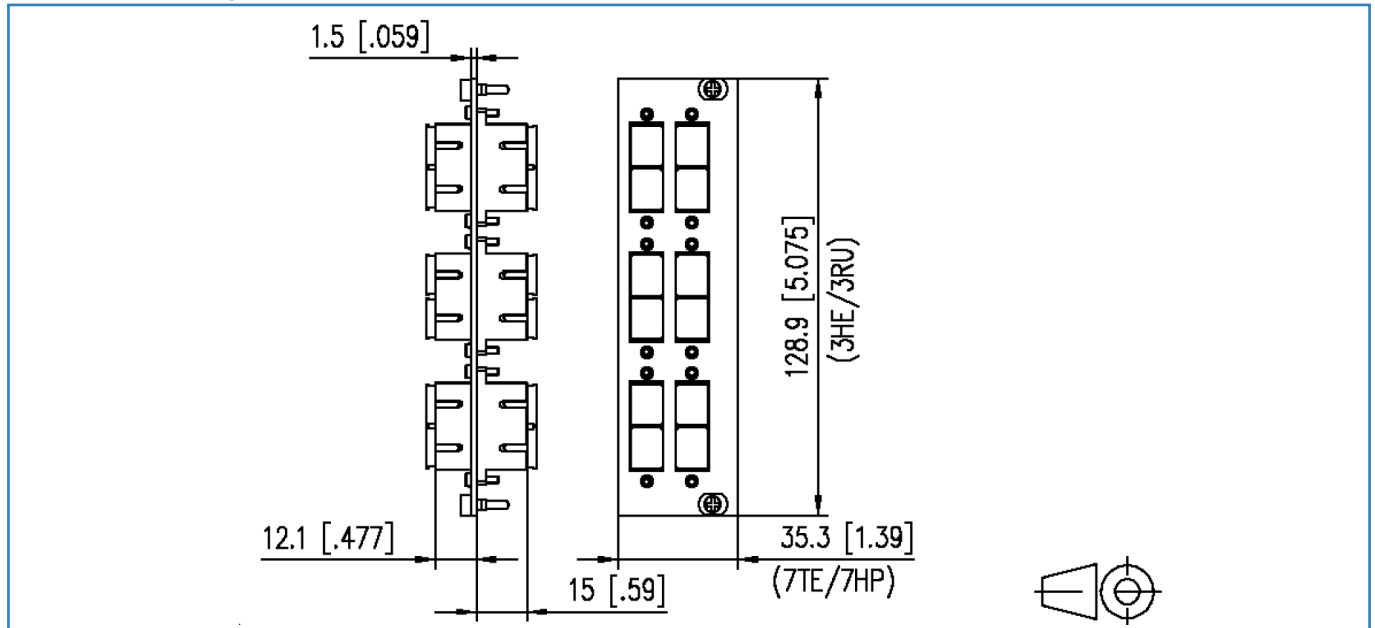

© 2018 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!

