
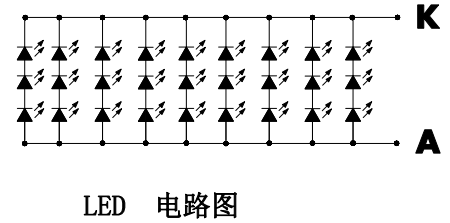
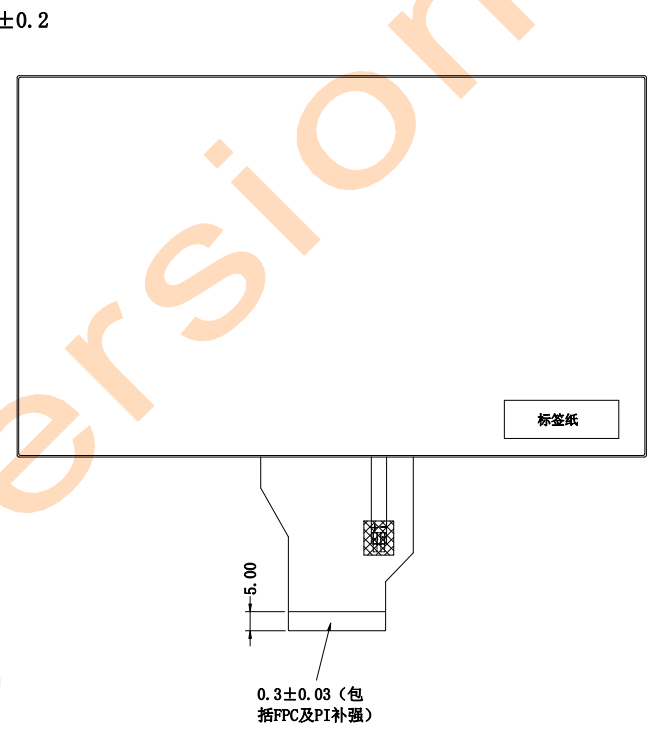


REV.	DRG DATE	DESCRIPTION	DRAWN BY

PIN	SYMBOL
1	LED+
2	LED+
3	LED-
4	LED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

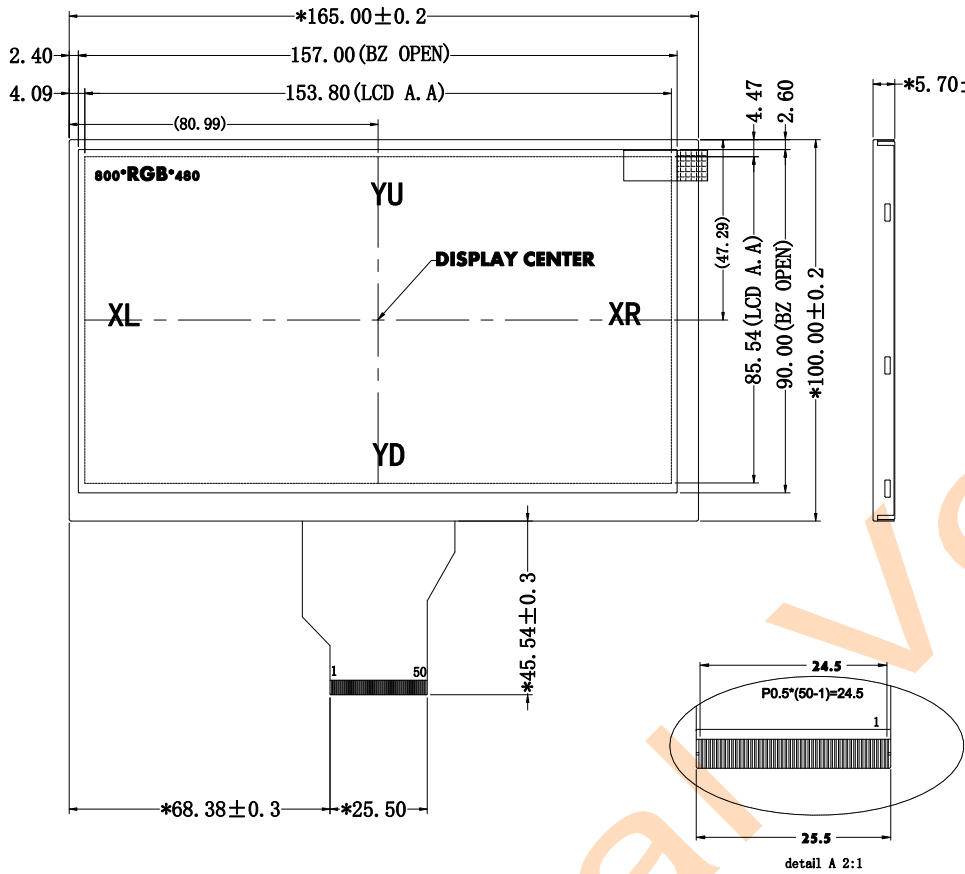

Specification:

- 1). Viewing angle: 6 O'clock
- 2). Display mode: 262K TFT/Transmissive/Normally White
- 3). Operating temp: -20° C~70° C
- 4). Storage temp: -30° C~80° C
- 5). LCD Driver IC:EK9713CA+EK73002ACGB
- 6). FPC MEET WITH CONNECTOR:
- 7). Backlight: 27 chip White LED (If=180mA, Vf=9.6V)
- 8). General Tolerance: ±0.2
- 9). MARK"*"IS THE IMPORTANT DIMENSION
- 10). ROHS Request

深圳市福瑞达显示技术有限公司 SHENZHEN FRIDA LCD CO., LTD					DRG DATE	2017-03-01	
					DRAWING	Wang Jin	
TITLE.		REV.	UNIT	SIZE	(3)	CHECK	
MODEL.	FRD70050SY57-27		mm	A4		APPROVE	