



Ver.	modify NO.	Details	Area	P.I.C	Date


Front View

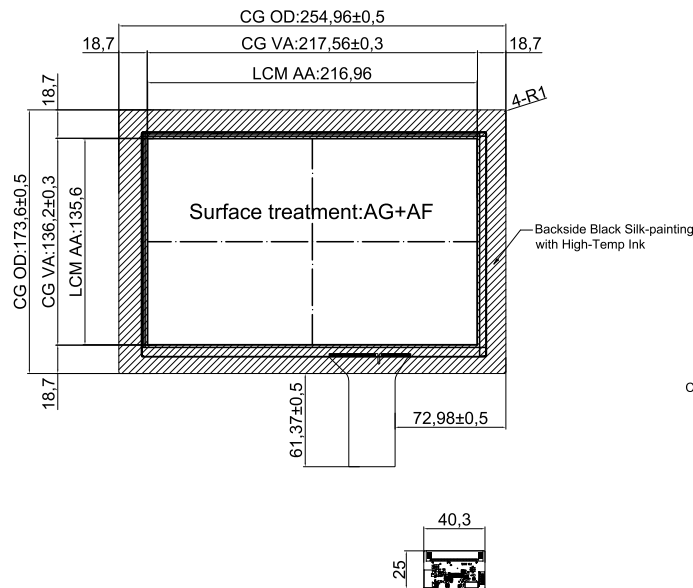


Side View

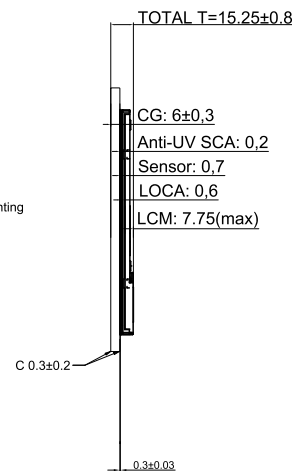

Back View

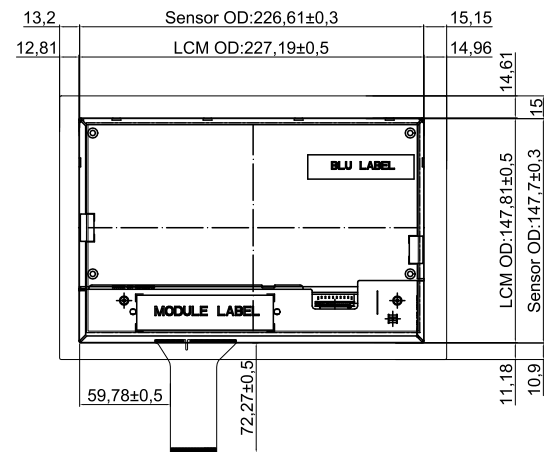

- Technical Datasheet:
1. Structure: TP+LCM Optical Bonding
 2. Cover Glass: 6mm Tempered Glass
 3. LCD: G101EVN03.1
 4. TP Controller: BTP-TPM-CTR-GOX-10.1B-SN05 COB
 5. TP Controller IC: GT2931
 6. Surface Hardness: ≥6H
 7. Light Transmittance: ≥82%
 8. Working Temperature: -20℃~+70℃, ≤85%RH;
 9. Storage Temperature: -30℃~+70℃, ≤85%RH;
 10. Unmarked Tolerance: ±0.5mm
 11. All materials used conform to RoHS standardsd



Connector:
P1:USB Male Connector
P2:1.25 Pitch 4pin Connector

Touch Display Structure		
TOP		
—Cover glass	6.0mm	
—SCA	0.2mm	
—ITO		
—Sensor glass	0.7mm	
—ITO		
—LOCA	0.6mm	
—LCM	7.75mm	
BOTTOM		

Designed by:	Curry. Wang
Checked by:	Rocky.Liu
Approved by:	Cale.Chen
Workmanship:	Qiao.An
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-TPM-G1-10.1-GOX-SN05			
Product Name: 10.1 inch Touch Display (TP+LCM Optical Bonding)			Drawing No.		PM101240412SN05
			Project Code.		PM101SN05
Business Unit: SNT-BTP			Period Mark	View Angle	Ratio
			A		1:1
BOM Code	2.03.101.01.0105		Page 1		Total 1 Page
Product Series	BTP-TPM		思诺泰科创电子（苏州）有限公司 SINOTRONICS INC.		