



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

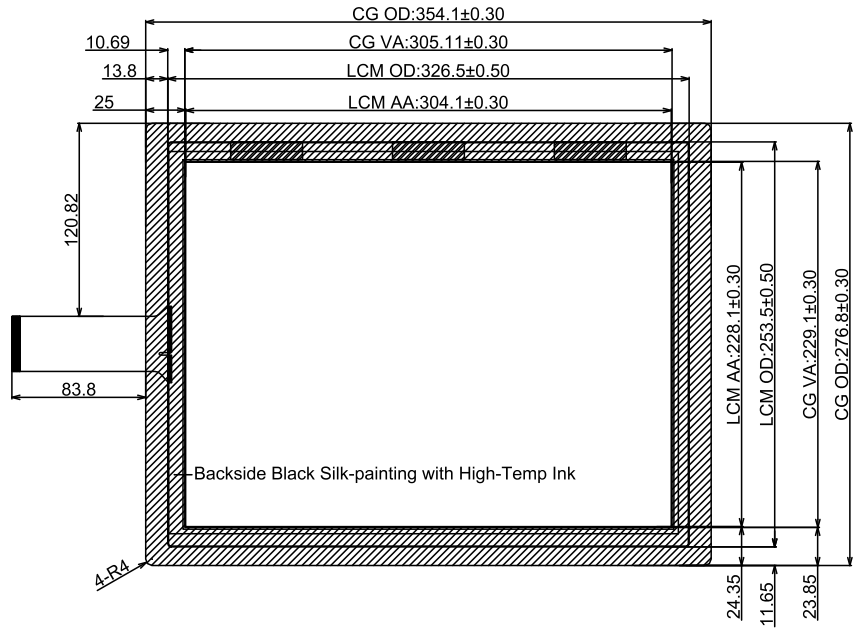

Side View





Back View

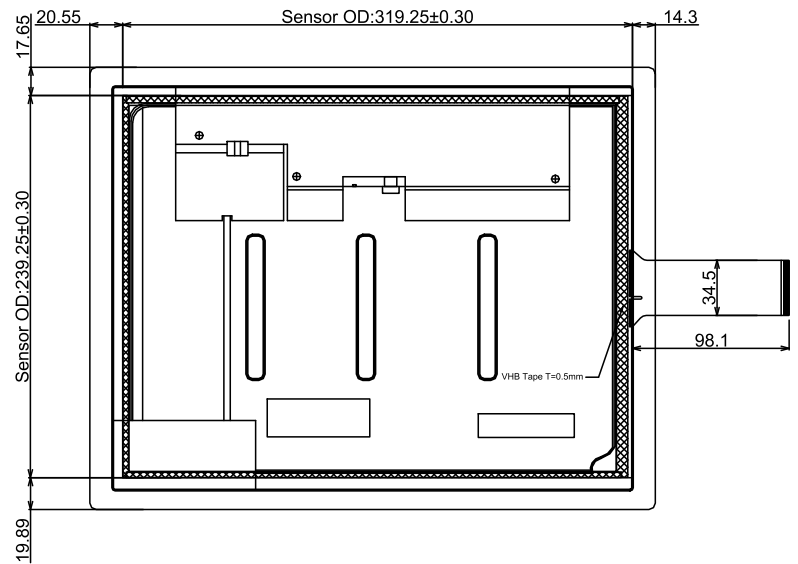

Technical Datasheet:

1. Structure: TP+LCM Tape Bonding
2. Cover Glass: 1.8mm Tempered Glass
3. LCD: G150XNE-L01
4. TP Controller: BTP-TPM-CTR-ETI-150S-R12
5. TP Controller IC: EETI80W46
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥85%
8. Working Temperature: -20℃~+70℃, ≤85%RH;
9. Storage Temperature: -30℃~+80℃, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standards

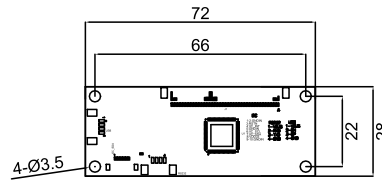

Connector:  
 P1:USB Male Connector  
 P2:1.25 Pitch 4pin Connector

Designed by:	Curry.Wang
Checked by:	Betty.Fu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-TPM-15-G1-R12		
Product Name:		Drawing No.	MS150230516R12	
15 inch Touch Display (TP+LCM Tape Bonding)		Project Code.	MS150R12	
Business Unit:		Period Mark	View Angle	Ratio
SNT-BTP		A		1:1
BOM Code	2.22.150.04.0112	Page 1		Total 1 Page
Product Series	BTP-TMS	思诺泰科电子(苏州)有限公司 SINOTRONICS INC.		