




正视图

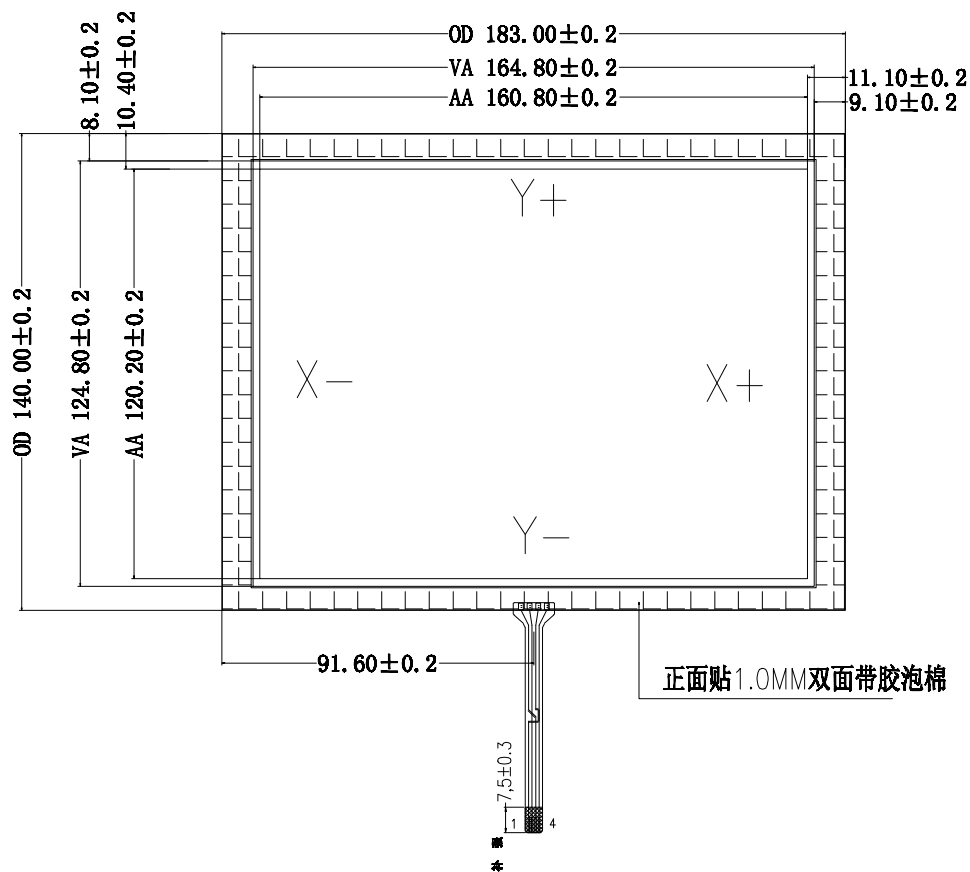

侧视图

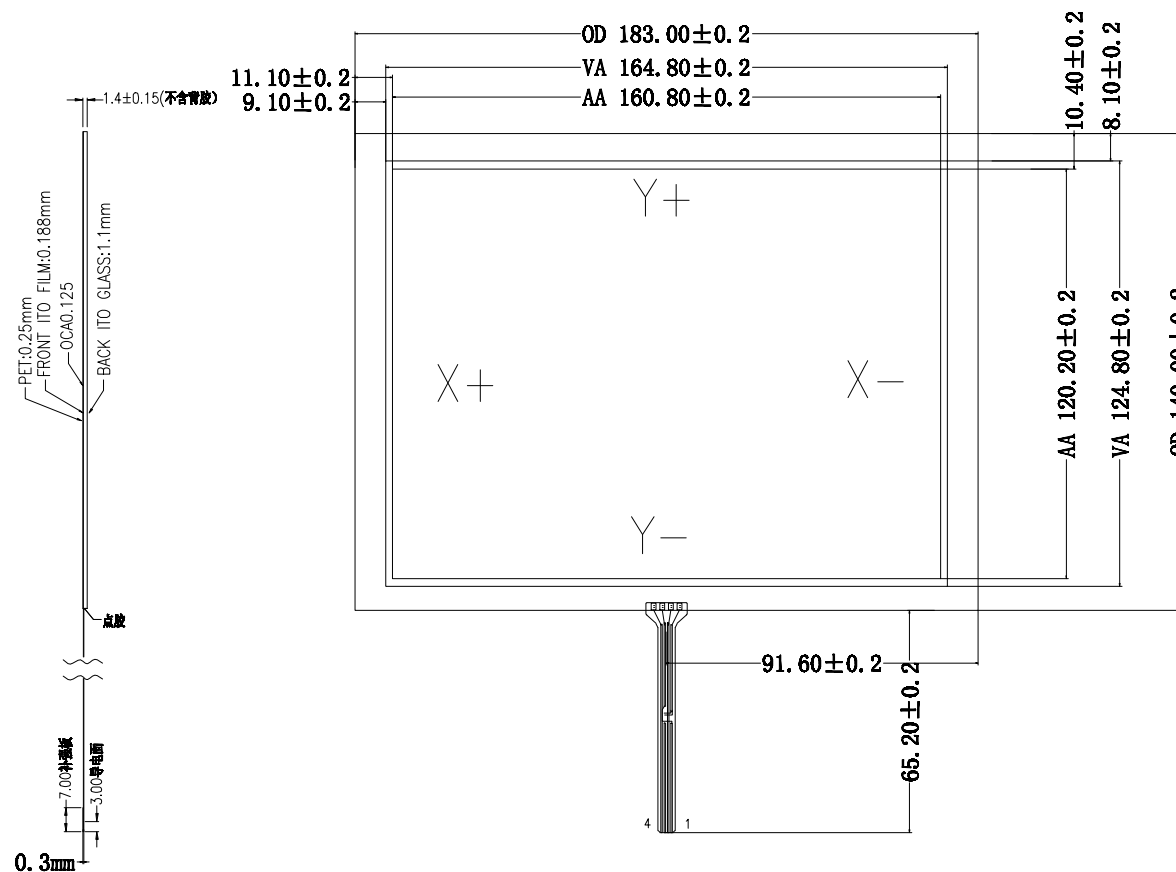


背视图

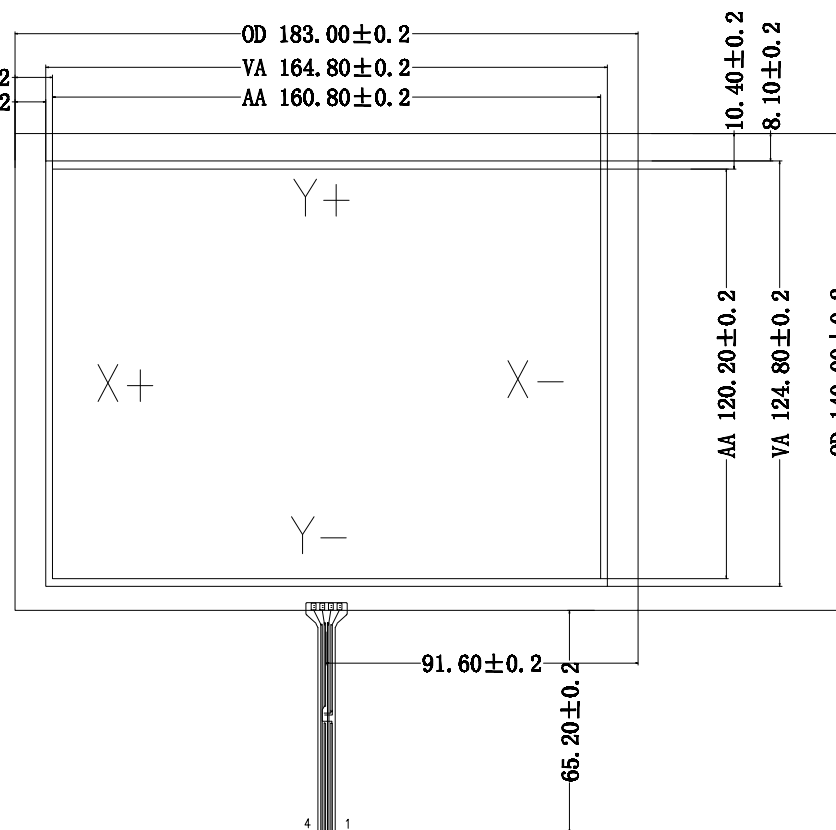

说明:

1. 结构: PET+film+glass+FPC  
film: 亮面防牛 (G0.188mm)  
glass: 500Ω/□ (1.1mm)  
tail: FPC (pitch=1.0mm)  
总厚度: 1.4±0.15mm
2. 工作电压: 5.0V
3. 电路等级: DC5V 1mA
4. 绝缘阻抗: ≥20MΩ (25V DC)
5. 线性: ≤1.5%
6. 透光率: ≥80%
7. 操作压力: 30-100g
8. 使用寿命: 点击≥1,000,000次  
画线≥100,000次
9. 工作环境: -30℃~+80℃, ≤90%RH
10. 储存环境: -35~+85℃, ≤90%RH
11. 未注尺寸公差按±0.20

逻辑:



UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES MILLIMETERS  
TOLERANCES: ANGLES ±1°  
.XX" ±.02"  
.XXX" ±.005"  
OR  
0.Xmm ±0.5mm  
0.XXmm ±0.13mm

客户型号: 客样	DATE: DE-DATE	DRAWING NO.:	REV
设计: Junping yi	DATE: CH-DATE	LX-TPM1300-8.4 产品工程图	REV
出图日期: 2018-06-13	DATE: APP-DATE	TITLE: TITLE	SHEET NO.: 1 OF 1

TMGY3008  
DESCRIPTION