

Note:

No.	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32


ELECTRICAL CHARACTERISTICS

Contact Current Rating: 3 Amperes.
 Dielectric Withstanding Voltage: AC 500V at sea level.
 Insulation Resistance: 1000 Megohms Min.
 Contact Resistance: 30 Milliohms Max.
 Operation Temperature: -55°C to $+105^{\circ}\text{C}$.


Material

Contact: Copper Alloy.
 Insulator: PBT. Select PA6T /LCP /PA9T
 Shell: SPCC.
 Z-Piece: Fe.
 Screw: Copper Alloy.
 Rivet: Copper Alloy. or Zinc.




*C0550-XXMACXXBR
 *C0550-XXMAEXXBR



*C0550-XXMBCXXBR
 *C0550-XXMBEXXBR



*C0550-XXMBBXXBR
 *C0550-XXMBDXXBR

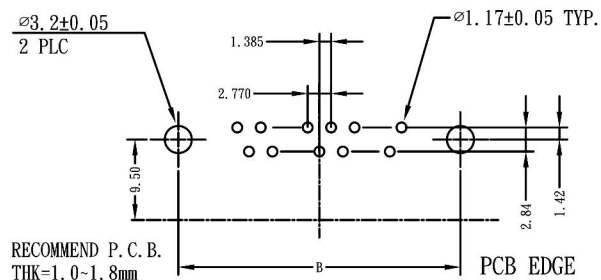

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD.	SCALE	TOLERANCE	PART NAME 品名
DWG. Karen	参考	.0 ±0.3 .00 ±0.25 ANG. ±2°	D-SUB PCB RIGHT ANGLE 7.2mm XXP MALE BLACK INSULATOR ROHS
DATE 2012/08/02	UNIT M M	SIZE A 4	PART NO.
	PAGE 1 OF 1	REV. B	料號 C0550-XXMXXXXBR