


HR600751

Electrical Specification @25°C


RoHS Compliant (Pb Free)

- Isolation: 3125 Vrms 1mA 1S (Pin1-3 to Pin6-4)
- Turns Ratio: Pin6-4 : Pin1-3 = 1.3CT : 1CT ±2%
- Pin1-3 Inductance: 475 uH Min @10KHz 100mVrms
- Pin1-3 DC Resistance: 0.35 ohms Max
- Pin6-4 DC Resistance: 0.40 ohms Max
- Current Rating: 150 mAac
- E-T Product(V-uS): 11 Typ
- Operating Temperature: -40 ~ +85 °C
- Storage Temperature: -40 ~ +85 °C

Schematics

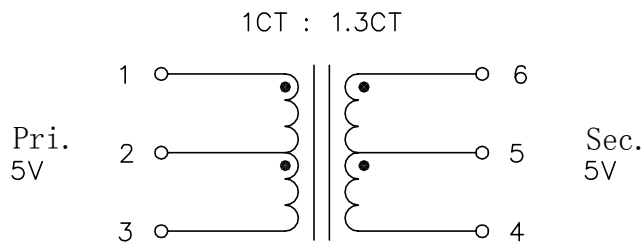

Mechanical Dimensions

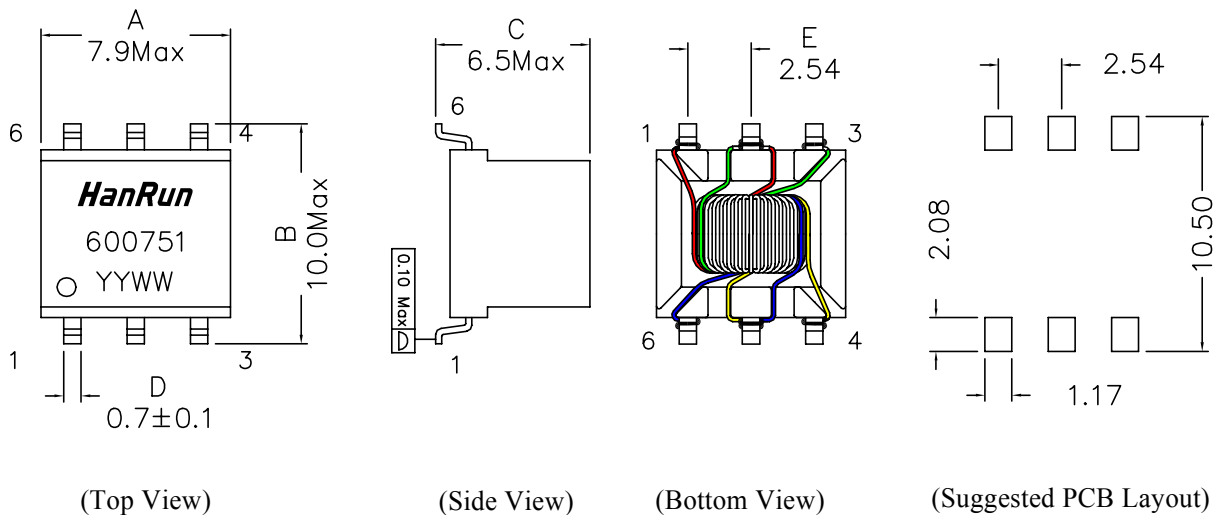

Unless otherwise specified,
Tol.: .xx ± 0.25 (mm)