


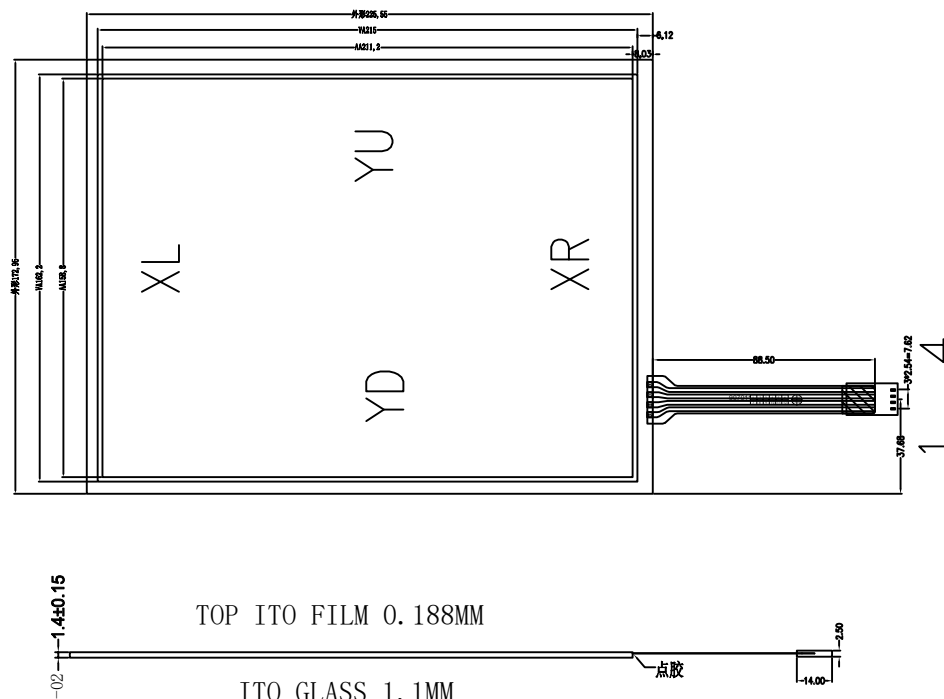


说明:

1. 结构: film+glass+FPC
film:雾面防牛 (0.188mm)
glass:500 Ω / $\square$ (1.1mm)
tail:FPC (pitch=1.0mm)
总厚度:
2. Operaring Voltage : $\leq 10V$
3. Operating Temperature : $-10^{\circ}C - 60^{\circ}C$
Storage Temperature : $-20^{\circ}C - 70^{\circ}C$
4. Life Time:>1000000 times
5. Connect Material : FPC
6. Response time : $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 78\%$
9. Surface Hardness $\geq 3H$ (pencil)
10. Operation force:20g~80g
11. Resistance: X:250 $\Omega - 450 \Omega$
Y:450 $\Omega - 800 \Omega$

客户确认: _____

逻辑:



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES MILLIMETERS TOLERANCES: ANGLES $\pm 1^{\circ}$.XX" $\pm .02$ " .XXX" $\pm .005$ " OR 0.Xmm $\pm 0.5mm$ 0.XXmm $\pm 0.13mm$				
客户型号:	DATE: DE-DATE	DRAWING NO.:		REV
设计: Junping yi	DATE: CH-DATE	LX-TPM1040-10.4		REV
出图日期: 2018-07-26	DATE: APP-DATE	TITLE: TITLE	SHEET NO.: 1 OF 1	