



Ver.	Modify No.	Details	Area	P.I.C	Date


Front view

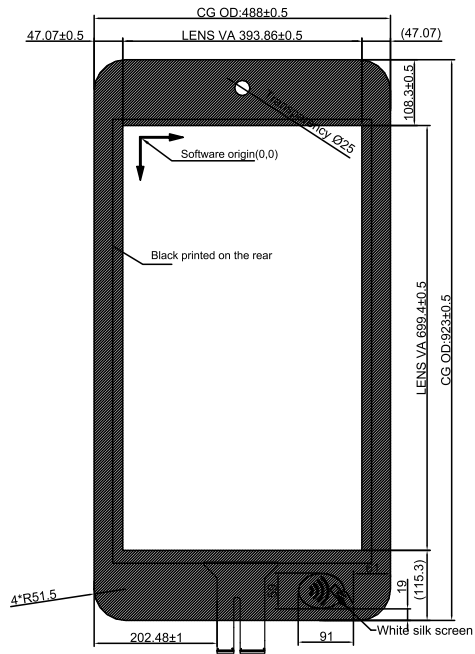

Side view


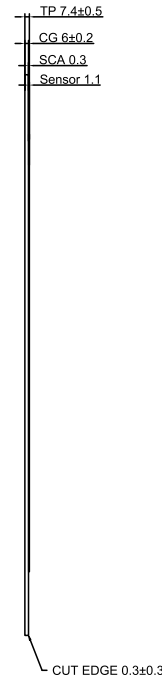


Back view

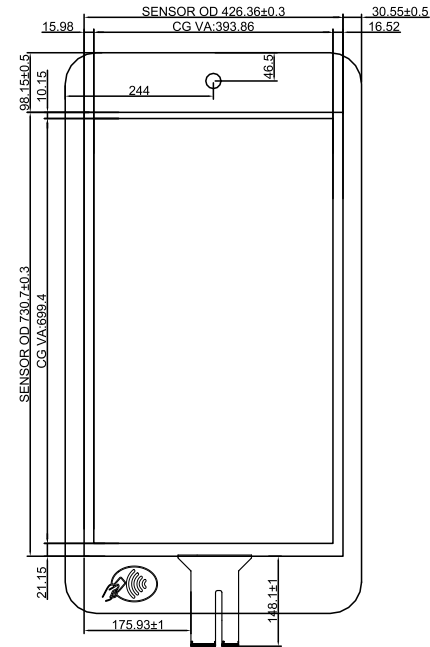

Technical parameter:

1. Structure type: Cover Glass+SCA+ITO Glass
2. Glass: T=6.0mm, Surface Hardness≥6H
3. Controller: BTP-GG-CTR-ILI-320S-ZG01 COB
4. Controller IC: ILI2312P.C3.P3.V1
5. Light transmission: ≥85%
6. Operating temperature: -20°C~+80°C, ≤85%RH
7. Storage temperature: -30°C~+80°C, ≤85%RH
8. Unmarked tolerance: ±0.5mm
9. All material used conform to RoHS standards



For USB Connector	
1	USBVDD5V
2	DN
3	DP
4	GNDIN

Designed by:	Curry.Wang
Checked by:	Rocky.Liu
Approved by:	Cale.Chen
Workmanship:	Yong.Xin
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-GG-TPS-32-ILI-ZG01		
Product Name: 32 inch Touch Panel		Drawing No.	G320231218ZG01	
		Project Code.	G320ZG01	
Business Unit: SNT-BTP		Period Mark	View Angle	Ratio
		A		1:1
BOM Code	1.04.320.01.0101	Page 1	Total 1 Page	
Product Series	BTP-GG	恩诺泰科电子(苏州)有限公司 SINOTRONICS INC.		