



Ver.	Modify No.	Details	Area	P.I.C	Date


FRONT VIEW

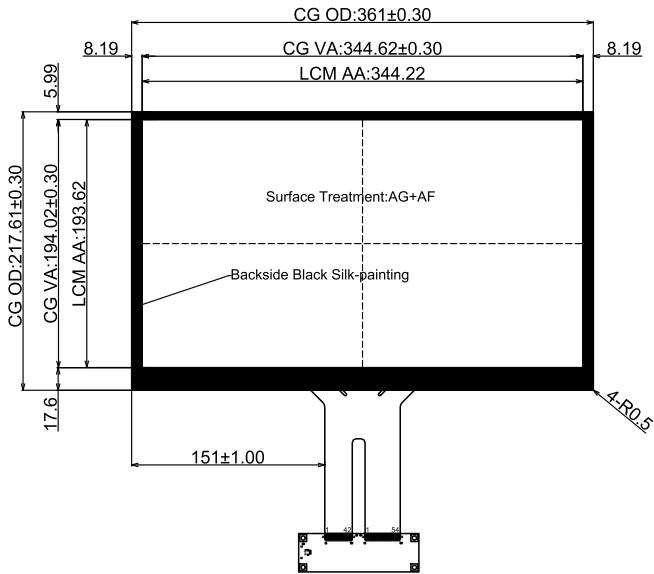


SIDE VIEW

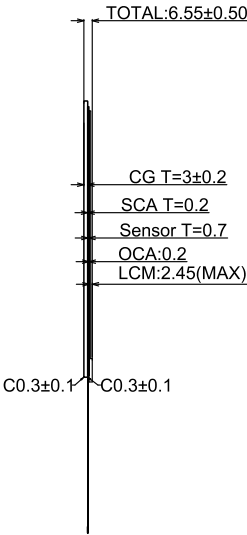

BACK VIEW

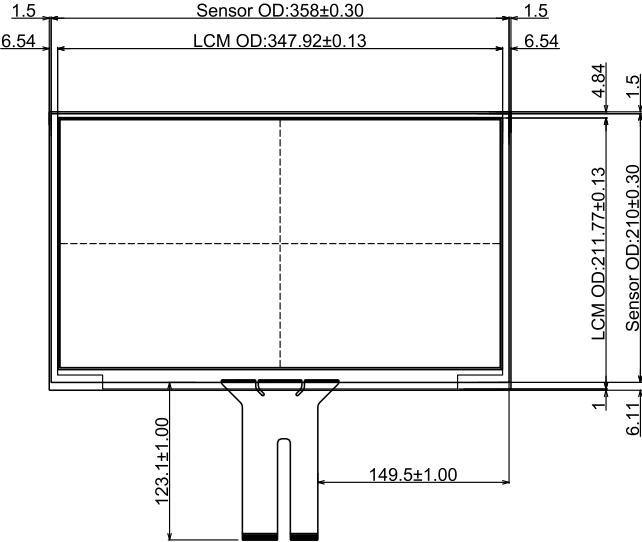

- Technical Datasheet:
1. Structure: TP+LCM Optical Bonding
 2. Cover Glass: 3mm Tempered Glass
 3. LCD: ATNA56YX03
 4. TP Controller: BTP-TPM-CTR-ILI-156B-SN30
 5. TP Controller IC: ILI2510 (Interface: USB)
 6. Surface Hardness: ≥6H
 7. Light Transmittance: ≥85%
 8. Working Temperature: -20℃~+70℃, ≤85%RH;
 9. Storage Temperature: -30℃~+80℃, ≤85%RH;
 10. Unmarked Tolerance: ±0.5mm
 11. All materials used conform to RoHS standards

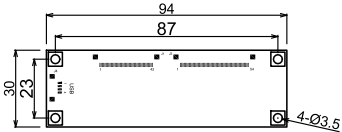

CONTROLLER
SC 2:1

USB PIN ASSIGNMENT

1	VBUS
2	DN
3	DP
4	GND

Designed by:	Curry.Wang	Business Unit: SNT-BTP		Period Mark		View Angle	Ratio
Checked by:	Jimmy.Lu			A		1:1	
Approved by:	Cale.Chen						
Workmanship:		BOM Code	2.03.156.01.0130	Page 1		Total 1 Page	
Standardization:	Link.Chen	Product Series	BTP-TPM	 思诺泰科创电子（苏州）有限公司 SINOTRONICS INC.			
Released by:	Rocky.Liu						