



10.02.2004 11:19

	APPROVAL SHEET No. <u>090DM</u>
安勤科技股份有限公司	0000000616
☒ 合格 Approval ☐ 不合格 Rejected ☐ 試用 Limited Qty. _____ PCS 送樣次數 ☐ ☐ ☐ ☐ ☐ ☐ ☐ 1 2 3 4 5 6 7	
料號	E1703710460R
品名	LCD Cable 31P/1.00-40P/1.25 46cm for CS5530 / Optrex T-51750GD065J-FW-AA(RoHS)
使用機種	適用於:CS5530
製造商/代理商	快異點
廠商型號	E1703710460R
Update 原因說明	
庫存說明	
其它	檢驗重點如螢光筆標示, "顏色 don't care ",其照片不變與有鉛相符.

檢驗者	Signature	OK/NG	Date																																																																
	郭沁群	OK	2009/04/07	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <tr> <th rowspan="2">附件</th> <th colspan="2">型式</th> <th colspan="5">發行單位</th> </tr> <tr> <th>實物 / 書面</th> <th>電子檔</th> <th>製造</th> <th>廠商(採購)</th> <th>品保</th> <th>研發</th> <th>資料中心</th> </tr> <tr> <td>廠商承認書</td> <td>☐</td> <td>☒</td> <td>☐</td> <td>☒</td> <td>☒</td> <td>☐</td> <td>☒</td> </tr> <tr> <td>樣品</td> <td>☐</td> <td>☒</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☒</td> </tr> <tr> <td>圖檔</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> <tr> <td>BIOS</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> <tr> <td>Gerber</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> <tr> <td>PCB 底片</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> <td>☐</td> </tr> </table>	附件	型式		發行單位					實物 / 書面	電子檔	製造	廠商(採購)	品保	研發	資料中心	廠商承認書	☐	☒	☐	☒	☒	☐	☒	樣品	☐	☒	☐	☐	☐	☐	☒	圖檔	☐	☐	☐	☐	☐	☐	☐	BIOS	☐	☐	☐	☐	☐	☐	☐	Gerber	☐	☐	☐	☐	☐	☐	☐	PCB 底片	☐	☐	☐	☐	☐	☐	☐
附件	型式		發行單位																																																																
	實物 / 書面	電子檔	製造		廠商(採購)	品保	研發	資料中心																																																											
廠商承認書	☐	☒	☐		☒	☒	☐	☒																																																											
樣品	☐	☒	☐		☐	☐	☐	☒																																																											
圖檔	☐	☐	☐		☐	☐	☐	☐																																																											
BIOS	☐	☐	☐		☐	☐	☐	☐																																																											
Gerber	☐	☐	☐	☐	☐	☐	☐																																																												
PCB 底片	☐	☐	☐	☐	☐	☐	☐																																																												
主管審核	陳毅隆	OK	2009/04/07																																																																
AE	邱璦儀	OK	2009/04/09																																																																
Web Update																																																																			
資料中心	曾鈺雅	OK	2009/04/09																																																																
審核	游慧雯	OK	2009/04/10																																																																
備註	1、以上所記,已經檢驗過,並給予承認。 2、本單不能代替採購單及其它用途。 3、如涉及專利及法律之問題,應由送樣廠商負全責。																																																																		

QD4-015 Rev.A7

安勤科技 測試報告

Rev.A3

料號	E1703710460R		測試日期	2009/04/07
品名	LCD Cable 31P/1.00-40P/1.25 46cm for CS5530 / Optrex T-51750GD065J-FW-AA(RoHS)			
使用機種	適用於:CS5530		測試樣品數	3 PCS
測試項目	勾選	項目	測試條件	結果
	☒	外觀	目檢	☒ Pass ☐ NG
	☐	材質		☐ Pass ☐ NG
	☒	電氣特性	電表量測	☒ Pass ☐ NG
	☐	機械強度		☐ Pass ☐ NG
	☐	實裝動作		☐ Pass ☐ NG
	☐	破壞實驗		☐ Pass ☐ NG
	☐	顏色		☐ Pass ☐ NG
	☐	尺寸		☐ Pass ☐ NG
	☐	沾錫性		☐ Pass ☐ NG
	☐	壽命實驗		☐ Pass ☐ NG
	☐	安規		☐ Pass ☐ NG
	☐	RoHS		☐ Pass ☐ NG
	☐			☐ Pass ☐ NG
使用儀器	三用電表 			
備註				
測試結果	☒ 符合測試條件及規格 ☐ 不符合，原因略述			
單位主管	陳穀隆		檢驗者	郭沁群

QD4-017

收件人員	簽核人員	收件時間	2009/04/07 11:25:08	簽核時間	2009/04/07 15:23:37	簽核結果	同意
111 陳穀隆	111 陳穀隆	同意					歷史簽核紀錄

第0030關

支號：0010 (流程角色：員工) 125 邱瓊儀

收件人員	簽核人員	收件時間	2009/04/07 15:23:37	簽核時間	2009/04/09 19:11:40	簽核結果	同意
125 邱瓊儀	125 邱瓊儀						歷史簽核紀錄

第0050關

支號：0010 (流程角色：部門職務) 部門= D100 資料中心 職務= D100000001 QD40150001

收件人員	簽核人員	收件時間	2009/04/09 19:11:40	簽核時間	2009/04/09 19:18:21	簽核結果	同意
439 曾鈺雅	439 曾鈺雅						歷史簽核紀錄

第0060關

支號：0010 (流程角色：部門職務) 部門= D100 資料中心 職務= A0080 課長

收件人員	簽核人員	收件時間	2009/04/09 19:18:21	簽核時間	2009/04/10 11:31:10	簽核結果	同意
027 黃意婷	007 游慧雯						歷史簽核紀錄

第0070關

支號：0010 (流程角色：部門職務) 部門= D100 資料中心 職務= D100000001 QD40150001

收件人員	簽核人員	收件時間	2009/04/10 11:31:10	簽核時間	2009/04/10 13:55:33	簽核結果	同意
439 曾鈺雅	439 曾鈺雅						歷史簽核紀錄



承 認 書

客戶：_____安勤科技股份有限公司_____

機種：_____

料號：_____E1703710460R_____



快異點企業有限公司


TEL: 03-4526538

FAX: 03-4614614

E-mail: ideal508@ms35.hinet.net

網址: <http://www.lcdcable.com/>

部號	品名	規格	用量
A1	HOUSING	BB06-S031V3-1-E1000或同等級DF9-31S-1V	1PCS
A2	HOUSING	HRS DF13-2*20P	1PCS
B2	TERMINAL	KB911-10T	29PCS
C	WIRE	1571 28# 0.6	28PCS
D	同軸線	RG-178B/U	1PCS
E	編織網	168*0.12T	1PCS
F1/F2	套管	Ø8.0/2.0	1/2PCS

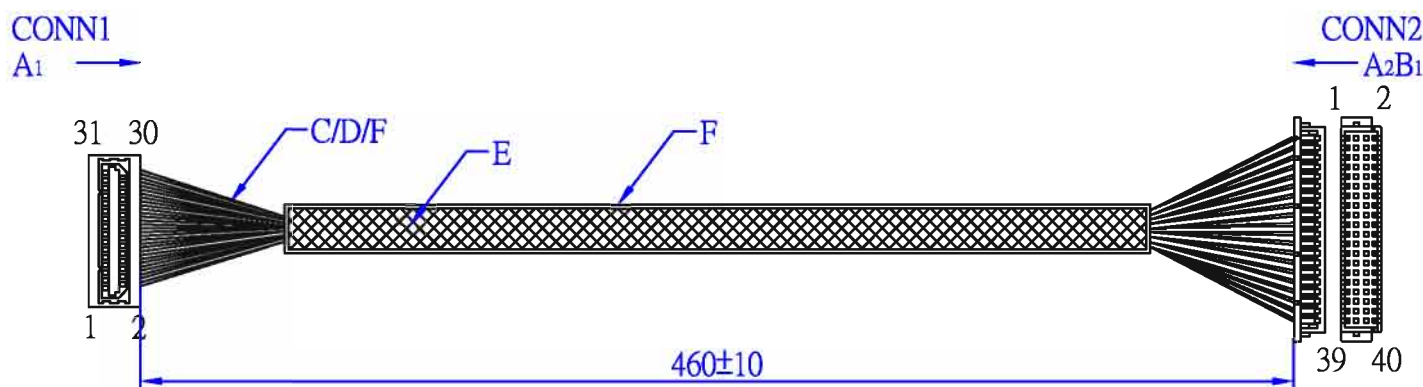

CONN1		CONN2		CONN1		CONN2	
PIN NO#	FUNCTION	PIN NO#	FUNCTION	PIN NO#	FUNCTION	PIN NO#	FUNCTION
1	GND(同軸地)	33	GND	17	G4	23	P14
2	CLK(同軸芯)	35	SHFCLK	18	G5	24	P15
3	HSYNC	38	LP	19	GND	3	GND
4	VSYNC	36	FLM	20	B0	11	P2
5	GND	4	GND	21	B1	12	P3
6	R0	27	P18	22	B2	13	P4
7	R1	28	P19	23	B3	14	P5
8	R2	29	P20	24	B4	15	P6
9	R3	30	P21	25	B5	16	P7
10	R4	31	P22	26	GND	34	GND
11	R5	32	P23	27	DENB	37	M
12	GND	8	GND	28	VCC	5	VCC
13	G0	19	P10	29	VCC	6	VCC
14	G1	20	P11	30	N.C.R/L	-	NC
15	G2	21	P12	31	N.C.U/D	-	NC
16	G3	22	P13				

備注:


客戶名稱	安勤科技股份有限公司	快異點企業有限公司			
客戶料號	E1703710460R	版次	A0	單位	MM
		料號	CAQ09040301	日期	2009-04-03

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO Conn-Tek
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.
DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

REV.	DATE	EC.	No.	DRA.	CHE.	APP.

GENERAL TOLERANCE	
X.	-----
X.X	± 0.2
X.XX	± 0.1
ANGLE	± 3°






DATE	2005.04.11
SCALE	2:1
REF. DOCUMENT	
APPLICATION	

PROJECTION	3rd 
CHECKED	
APPROVED	

SERIES	BB06
Mark	

NAME	Board to Board Conn. 1.0mm pitch, Straight SMT ,Socket

Conn-Tek CORPORATION	
DRAW. No. S1060-00010 (正新)	
REV.	1
SH.	1/2

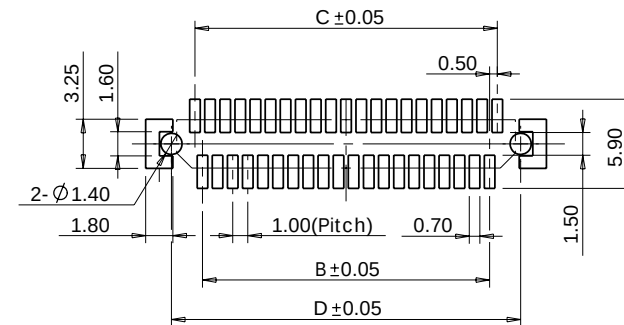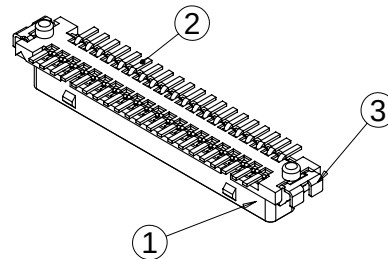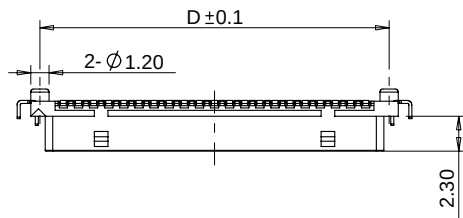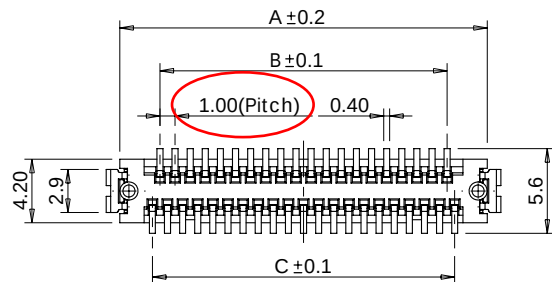

PCB Layout(REF.)
Component Top View

Table 1

Pos.	Part name	Part number	A	B	C	D	Note
31	BB06-S031V3-1-E1000	S1060-03110	19.3	14	15	18.1	No H/D
31	BB06-S131V3-1-E1000	S1060-13110	19.3	14	15	18.1	No H/D
41	BB06-S041V3-1-E1000	S1060-04110	24.3	19	20	23.1	
41	BB06-S141V3-1-E1000	S1060-14110	24.3	19	20	23.1	No H/D

3	Hold down	2	Brass	Sn Plated	
2	Terminal	Table 1	Phosphor bronze	Au plated	
1	Insulator	1	PA46+GF		UL 94V-0
No.	Description	Qty	Material	Finish	Note

NOV 30 2006 10:25AM P1

C1060-10101
材証

FS-QE-16-R1

台灣省桃園縣楊梅鎮民權路8號

Tao Yuan Hsiao, Taiwan
TEL: 886-3-472-5833 FAX: 886-3-472-7711

Customer: 亞松貿易有限公司
Specification: CS210R-EH JIS H3100(2003) Our Order No:

Your P/O No:
Your Part No:

Date: 2006/11/29
Weight: 0 Kg

Lot No.	Standard Dimension	Property Test								
		Yield strength (Kg/mm ²)	Tensile strength (Kg/mm ²)	Young's strength (Kg/mm ²)	Elongation (%)	Hardness (Hv.3)	Conductivity (%IACS)	Bend Test (180°)	Grain Size (mm)	Weight (Kg)
			65 ~ 75		≥ 11	210 ~ 230	≥ 0		≤ 0.01	
STB-95H0652-2	0.2 ± 390	63.93	71.5	10197	18	223-225	13	Good	0.01	0

Lot No.	Standard	Composition (wt%)						Surface Roughness Ra(μm)	Sur face	Dimension	
		Cu	Sn	P	Zn	Fe	Pb			Thickness(mm)	Width(mm)
			7 ~ 9	0.03 ~ 0.35	≤ 0.200	0 ≤ 0.1	0 ≤ 0.009	≤ 0.15		0.19 ~ 0.21	389.8 ~ 390.2
STB-95H0652-2	92.1031		7.755	0.0985	0.0013	0.0114	0.003	0.092	Good	0.2	390

Remark: 1. Mechanical properties shall be determined in accordance with ASTM E8 · ISO 6892 ·
2. Conductivity shall be determined in accordance with ISO 1337 ·



0.2 v 12.5
0.2 v 17
0.2 v 20

Approved by: [Signature]
25.11.29

Checked by: [Signature]



DSM Engineering Plastics (Jiangsu) Co., Ltd.No.18 Pan Long Shan Road, Jiangyin,
Jiangsu Province, China 214434

Telephone: +86-510-88-198290, Telefax: +86-510-88198295



Date : 23.09.2008
Your purchase order : TWN HEXAPALS
970810K
Our order number : 171448
Delivery / item : 80257022 / 10
Delivery date : 29.09.2008
Shipment number : 196249
Container ID :
Customer number : 4020010275

Certificate of Analysis

Page 1 / 1

Material: Our / Your reference
0000015230 TS250F800001V3110 /

Brandname: STANYL (R)

Batch 0801370581 / Quantity 10,000 KG

Characteristics	Unit	Value	L-Limit	U-Limit	Method
Moisture	%	0.035		0.100	ISO 16512
Viscosity Number	mm ² /s	153	130	170	ISO 307
Reinforcing Filler Content	%	41.5	40.0	44.0	ISO 3451
UL 94mm(48hours)		V-0			UL 94

Wu Yong
Quality Control Supervisor


This material covered by this delivery is produced in accordance with DSM Engineering Plastics internal QCP / in manufacturing specifications currently in force for this product grade, unless otherwise stated hereunder. DCPU certifies that the material supplied conforms to the performance typical for this grade and production description, and has been produced in accordance with the internal quality control system employed in our company. However, the buyer must check the suitability of this grade for the actual application.

This certificate does not release the recipient from his obligation to carry out his usual incoming goods inspection.
Our general conditions of sale remain in force.

Mar. 11 2009 11:49AM P 1

FRX NO. :

FROM :



DATE: NOV. 20, 2006

Commodity: C 2680 R BRASS STRIP (II)


 ISO 9002:4M8Y035-00
 台正字第 3544 號

Applied Standard: CNS 4383 Brass Sheets, Plates and Strips

Work No.	Size of Product			Cu(%)	Fe(%)	Pb(%)	Zn(%)		
	Thickness (mm)	Width (mm)	Length (mm)						
	Standard								
				64.00 - 68.00	max. 0.050	max. 0.050	REM.		
5AA561A	0.200	610.000		64.809	0.005	0.001	REM.		
5AA561B	0.200	610.000		64.809	0.005	0.001	REM.		

[illegible]