REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.03.29	钟建虾

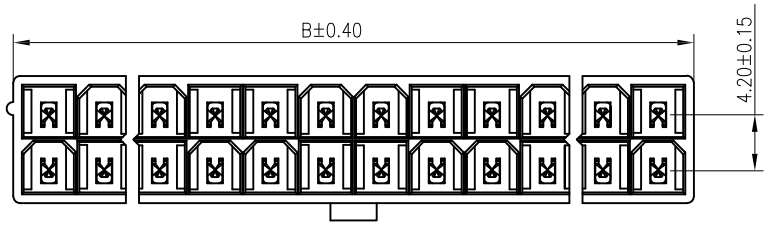

NOTES:
CURRENT RATING: 7A AC/DC.
VOLTAGE RATING: 250V AC/DC
TEMPERATURE RANGE :−25°C~+85°C.
CONTACT RESISTANCE: 20mΩ Max.
INSULATION RESISTANCE: 1000MΩ Min.
WITHSTANDING VOLTAGE: 1500V AC/MINUTE.
MATERIAL: NYLON66.UL94V-2.

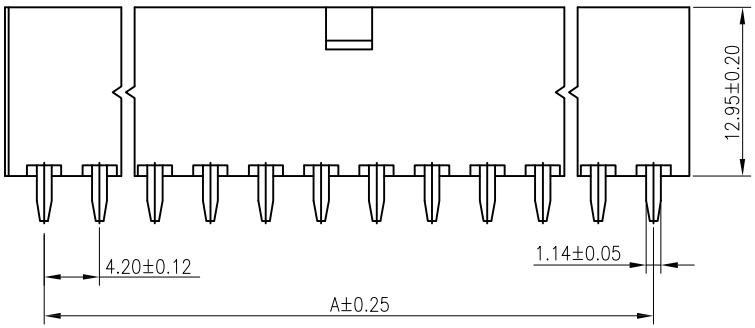



No.of pin/row	Dimensions	
	A	B
01	---	5.60
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60
07	25.20	30.80
08	29.40	35.00
09	33.60	39.20
10	37.80	43.40
11	42.00	47.60
12	46.20	51.80

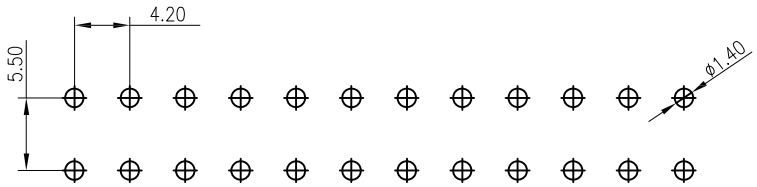

PCB LAYOUT

Ordering Information

G WRA209-XX XX A 001 E X W X -9B

- XX: No. of Pins per Row 01~12
- XX: Standard Plating 01=Tin; Selective Plating 02=Gold Flash, 22=Matte Tin, ...
- X: Color F=Transparent, ...
- X: Standard Packing N=PE Bag; Selective Packing C=Tube, ...

Greenconn Website:www.greenconn.com E-mail:sales@greenconn.com	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED: 钟建虾	DATE: 2021.03.29	DWG. NO. GWRA209-CA1EW	TITLE. 4.2mm pitch 180° wafer
		X.°±3.0°	X.±/				
		.X°±2.0°	.X±0.25	CHECKED:	DATE:	PART NO. GWRA209-XXXXA001EXWX-9B	
		.XX°±1.5°	.XX±0.20				
REV. A / UNIT. mm / SCALE. 1:1	PAGE. 1/1	.XXX°±1.0°	.XXX±0.15	APPROVED:	DATE:		