

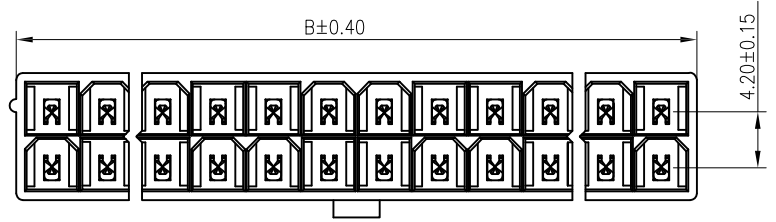



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2021.03.29	钟建虾



NOTES:
 CURRENT RATING: 7A AC/DC.
 VOLTAGE RATING: 250V AC/DC
 TEMPERATURE RANGE : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
 CONTACT RESISTANCE: 20mΩ Max.
 INSULATION RESISTANCE: 1000MΩ Min.
 WITHSTANDING VOLTAGE: 1500V AC/MINUTE.
 MATERIAL: NYLON66.UL94V-2.

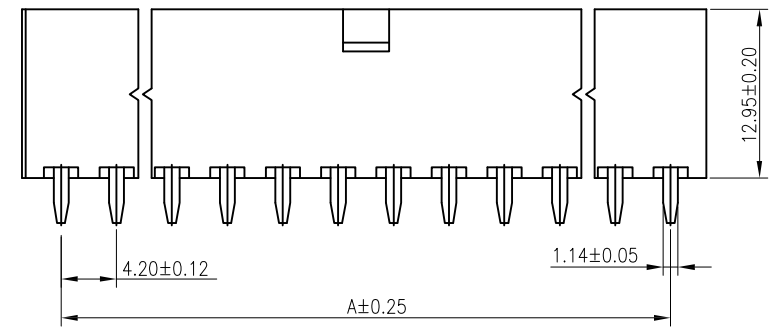

No. of Pins/Row	Dimensions	
	A	B
01	---	5.60
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60
07	25.20	30.80
08	29.40	35.00
09	33.60	39.20
10	37.80	43.40
11	42.00	47.60
12	46.20	51.80

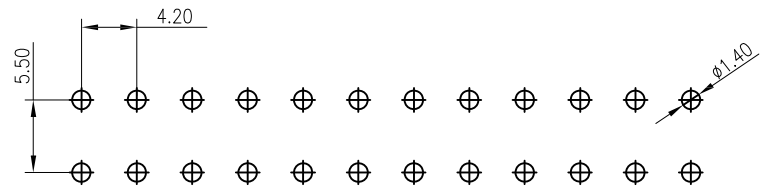

Ordering Information

G WRA209-XX XX A 001 E X W X -9B

No. of Pins per Row 01~12 Standard Plating 01=Tin Color F=Transparent Standard Packing N=PE Bag

Selective Plating 02=Gold Flash ... Selective Packing B=Tray

22=Matte Tin ... C=Tube

<p>Website: www.greenconn.com E-mail: sales@greenconn.com</p>	3RD.ANG PROJ. 	GENERAL TOLERANCE		DESIGNED: 钟建虾	DATE: 2021.03.29	DWG. NO. GWRA209-CA1EW	TITLE. 4.2mm pitch 180° wafer
		X'±3.0'	X.±/	CHECKED:	DATE:		
		.X'±2.0'	.X±0.25	APPROVED:	DATE:	PART NO. GWRA209-XXXXA001EXWX-9B	
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1	.XX'±1.5'	.XX±0.15		
				.XXX'±1.0'	.XXX±0.10		