

### FEATURES

1. Package Type: DIP24
2. Universal Input: 4:1
3. Operating temperature range: -40°C - +85°C
4. Isolation voltage: 1500VDC
5. High efficiency up to: 88% (Type)
6. Input undervoltage protection.
7. Output short-circuit protection, overvoltage protection, overcurrent protection mechanism.
8. Fields of application: Industry, Power, Instrumentation, Communication, Rail transit.



3 years  
Warranty

### Selection Guide

Part No.	Input Voltage (VDC)		Output		Full Load Efficiency% (Typ.)	Capacitive Load(μF) Max.
	Nominal (Range)	Max.	Voltage (VDC)	Current(mA) Max.		
ZYB2403ZP-10WR3	24 (9-36)	40	3.3	2400	87	1200
ZYB2405ZP-10WR3			5	2000	87	1000
ZYB2412ZP-10WR3			12	833	87	470
ZYB2415ZP-10WR3			15	667	87	330
ZYB2424ZP-10WR3			24	416	88	100
ZYA2405ZP-10WR3			±5	1000	83	#1000
ZYA2412ZP-10WR3			±12	416	87	#470
ZYA2415ZP-10WR3			±15	333	87	#330
ZYB4803ZP-10WR3			48 (18-75)	80	3.3	2400
ZYB4805ZP-10WR3	5	2000			88	1000
ZYB4812ZP-10WR3	12	833			87	470
ZYB4815ZP-10WR3	15	667			87	330
ZYB4824ZP-10WR3	24	416			88	100
ZYA4805ZP-10WR3	±5	1000			83	#1000
ZYA4812ZP-10WR3	±12	416			87	#470
ZYA4815ZP-10WR3	±15	333			87	#330

#Each output

### Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load/no load)	24VDC Nominal input series, nominal input voltage	Single 3.3VDC Output	--	379/12	388/25	mA
		Single 5VDC Output	--	473/6	484/15	
		Other Output	--	502/5	515/12	
	48VDC Nominal input series, nominal input voltage	Single 3.3VDC Output	--	192/5	197/20	
		Single 5VDC Output	--	239/6	245/12	
		Other Output	--	251/4	258/8	
Reflected Ripple Current	24VDC Nominal input series, nominal input voltage		--	40	--	mA
	48VDC Nominal input series, nominal input voltage		--	30	--	
Input impulse voltage	24VDC Nominal input series, nominal input voltage		-0.7	--	50	VDC
	48VDC Nominal input series, nominal input voltage		-0.7	--	100	
Starting voltage	24VDC Nominal input series, nominal input voltage		--	--	9	VDC
	48VDC Nominal input series, nominal input voltage		--	--	18	
Input undervoltage protection	24VDC Nominal input series, nominal input voltage		5.5	6.5	--	VDC
	48VDC Nominal input series, nominal input voltage		12	15.5	--	
Input Filter			Capacitance Filter			
Hot Plug			Unavailable			
Ctrl	Module enabled		Suspended or 3.5-12V open			
	Module shutdown		0-0.7V shutdown			

### Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	0%- 100% load	Single 3.3/5VDC Output	--	±0.5	±2	%
		Other Output	--	±1	±3	
Linear Regulation	Input voltage from low limit to high limit, full load	Positive output	--	±0.2	±0.5	%
		Negative output	--	±0.5	±1	
Load Regulation	10%- 100% load	Positive output	--	±0.5	±1	%
		Negative output	--	±0.5	±1.5	
Ripple & Noise	20MHz bandwidth		--	40	80	mVp-p
Transient Recovery Time	25% load step change		--	300	500	ms
Transient response deviation	25% load step change	Single 3.3/5VDC Output	--	±5	±8	%
		Other Output	--	±3	±5	
Temperature Drift Coefficient	Full Load		--	--	±0.03	%/°C
Overcurrent protection	Input voltage range	Single 3.3/5VDC Output	110	160	--	%Io
		Other Output	110	140	--	
Short-Circuit Protection	Input voltage range		Continuous, Self-Recovery			

**Note:**

1.Auxiliary circuit output voltage(Vo2) maximum accuracy is ±5%; 2.Load regulation for 0%-100% load is ±5%.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Insulation Voltage	Input-output, test time 1 minute, leakage current less than 1mA	1500	--	--	VDC
Insulation Resistance	Input-output, insulated voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	2000	--	pF
Operating Temperature	See Figure 1	-40	--	85	°C
Storage Temperature		-55	--	125	°C
Storage Humidity	Non-condensing	5	--	95	%RH
Pin welding can withstand the highest temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Switching Frequency	Full load, nominal input voltage	--	300	--	kHz
MTBF	MIL-HDBK-217F@25°C	>1000K Hours			

### Mechanical Specification


Case Material	Aluminum alloy
Package Dimensions	32.00 × 20.00 × 11.10mm
Weight	12.70g(Typ.)
Cooling Method	Free air convection

### EMC Specifications



EMI	CE	CISPR32/EN55032 CLASS A			
	RE	CISPR32/EN55032 CLASS A			
EMS	ESD	IEC/EN61000-4-2	Contact±4KV	Perf.Criteria	B
	RS	IEC/EN61000-4-3	10V/m	Perf.Criteria	A
	EFT	IEC/EN61000-4-4	±2KV (Recommended circuit diagram 3-①)	Perf.Criteria	B
	Surge	IEC/EN61000-4-5	±2KV (Recommended circuit diagram 3-①)	Perf.Criteria	B
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf.Criteria	A
	Voltage sag, drop, and short-term interruption immunity	IEC/EN61000-4-29	0-70%	perf.Criteria	B

### Typical Characteristic Curves



Temperature Derating Curve (Figure 1)

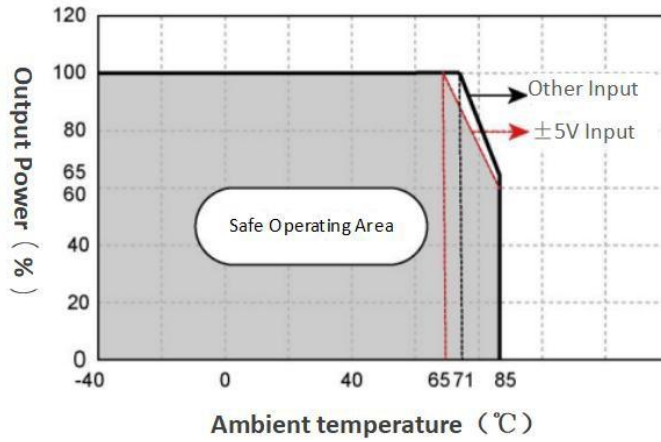

Efficiency VS Input Voltage Curve (Full load)      Efficiency VS Output Load (Vin=24V)

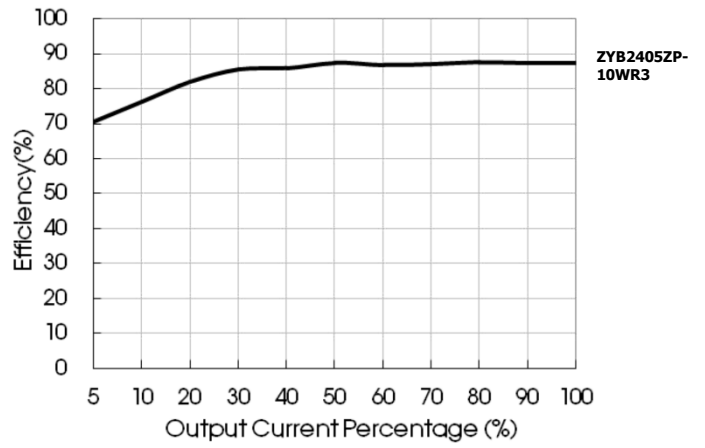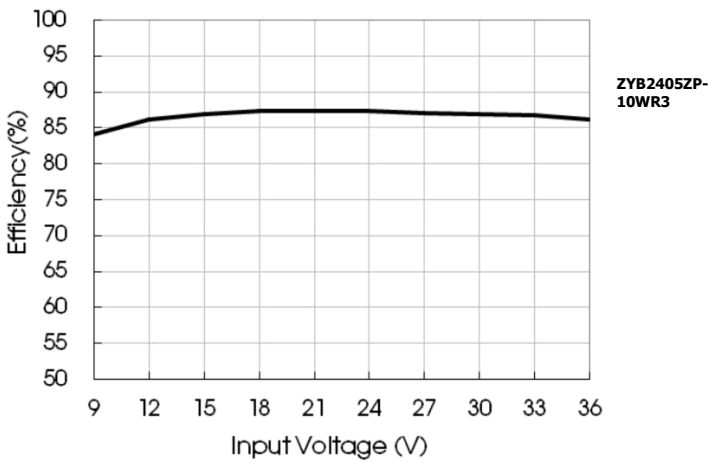

Efficiency VS Input Voltage Curve (Full load)      Efficiency VS Output Load (Vin=48V)

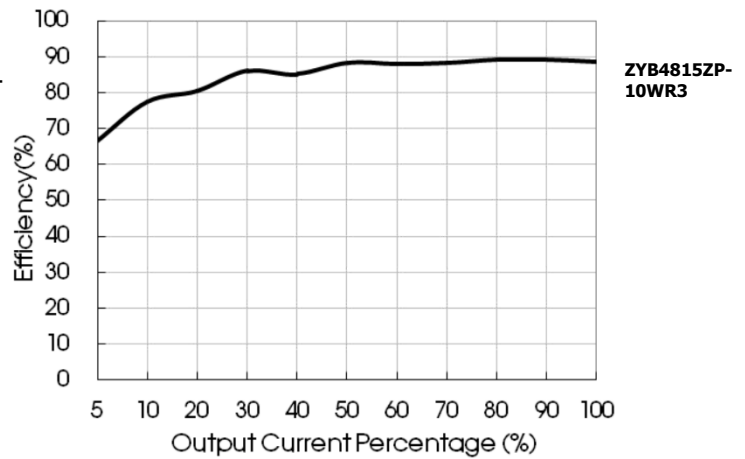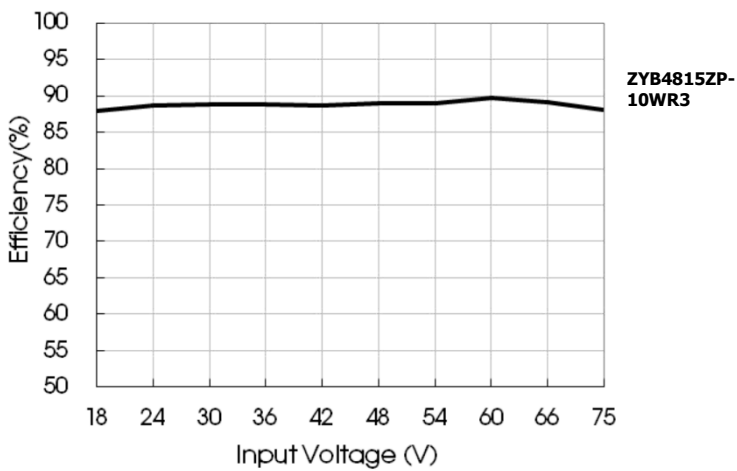

### Typical Circuit Design and Application

Application circuit (Figure2)	Recommended Capacitive Load Value Table	
	Vin	24V      48V
	Cin	100uF      10-47uF
	Cout	10uF

#### Application circuit description:


- All DC/DC converters in this series are tested according to the recommended testing circuit (Figure 2) before leaving the factory.
- If further reduction of input and output ripple is required, the input and output external capacitor Cin1 can be connected. Increase or select capacitors with small series equivalent impedance values for Cin2, Cs, and Cout, Cs are used to reduce ripple, and if the ripple meets the demand, there is no need to add Cs. But suitable filtering capacitors should be selected, as excessive capacitance may cause startup problems. For each output, under safe and reliable working conditions, the maximum capacitance value of its filtering capacitor cannot exceed the maximum capacitive load of the product.

### EMC Solutions - Recommended Circuits

3.3VDC、5VDC Output (Figure3)	EMI Recommended Parameter Table	
	Model	Vin: 24V      Vin: 48V
	FUSE	Select based on the actual input current of the customer
	C0、C4	330μF/50V      330μF/100V
	C1、C2	10μF/50V      10μF/100V
	C3	Refer to the Cout in Fig.2
	LCM1	1.4-1.7mH
	LDM1	10uH
	CY1、CY2	1nF/2KV
<p>Note:</p> <p>Part ① of Figure 3 is used for EMC testing; Part 2 is used for EMI filtering and can be selected according to requirements.</p>		


## Dimensions and Recommended Layout

### Dimensions

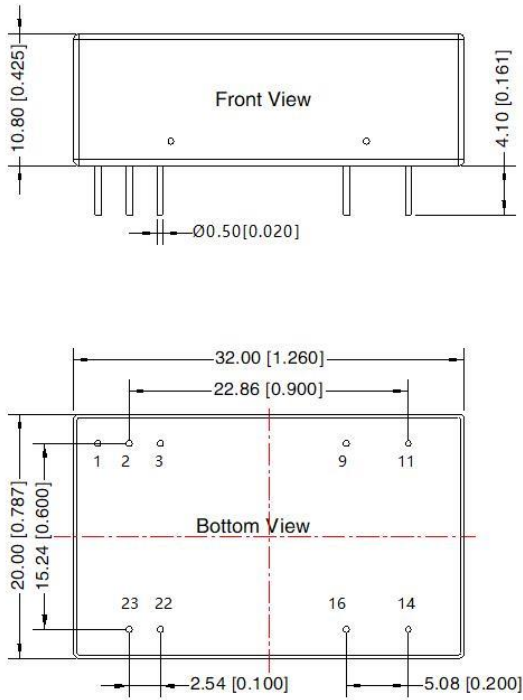

Note:  
 Unit: mm[inch]  
 Pin diameter tolerances:  $\pm 0.10 [\pm 0.004]$   
 General tolerances:  $\pm 0.50 [\pm 0.020]$

### PCB Printing Layout

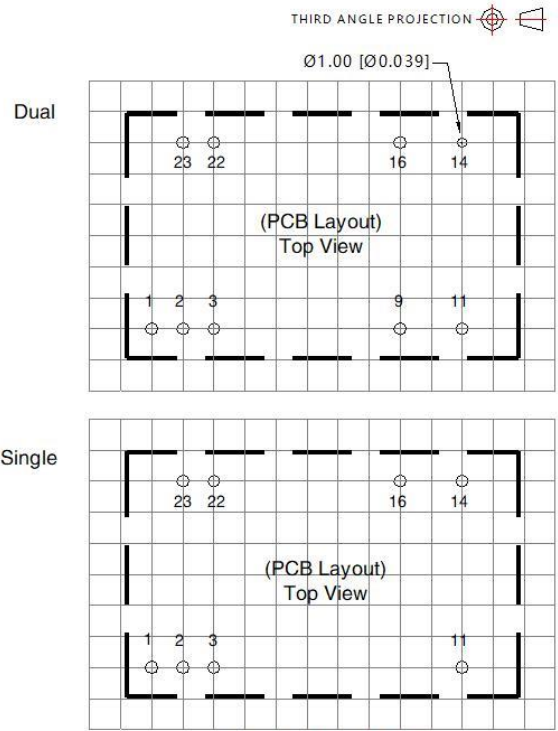

Note: Grid 2.54\*2.54mm

Pin	Pin-Out	
	Single	Dual
1	Ctrl	Ctrl
2,3	GND	GND
9	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

NC: Pin to be isolated from circuit

#### Note:

1. If the product works under the minimum required load, it cannot guarantee that the performance of the product complies with all the performance indicators in this manual;
  2. The maximum capacitive load is tested under the input voltage range and full load condition;
  3. Unless otherwise stated, all indexes in this manual are measured at  $T_a=25^\circ\text{C}$ , humidity  $<75\%RH$ , nominal input voltage and rated output load;
  4. All index testing methods in this manual are based on the enterprise standards of the company;
- Our company can provide product customization, specific needs can directly contact our technical staff;