

MF5A Series bead temperature thermistor is made of new materials, new technology of production of small type epoxy resin coating of NTC thermistor, has the advantages of high precision and fast response. It is subdivided into various sub-series according to the difference in lead wire configuration.



Typical Applications

- Air conditioning equipment
- Heating equipment
- Medical equipment
- Temperature control instruments
- Electronic gifts
- Electronic temperature and humidity meter
- Auto temperature measurement
- Electronic calendar
- Rechargeable batteries and charger



Features

- Tin plating steel wire radial type epoxy resin encapsulation
- Wide range of resistance
- High precision
- Small size and fast response
- High stability


Technical Data

Item	Temperature
Temperature range	-40°C to +150°C
Response time	Water (0.4m/s) $T_{0.63} \leq 7s$
Dissipation factor	$\geq 2mW/^\circ C$
Long-term stability	Drift $\leq 3\%$ after 1000h heat or cold store (80°C / -30°C)

Dimensions (mm)

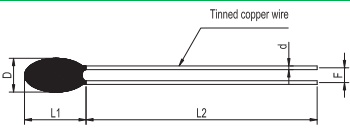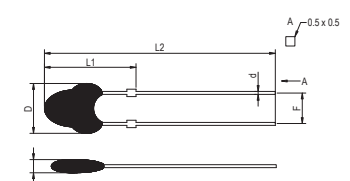
Part No.	Figure	Dimensions																					
MF5A-2/3		Tin. Plated copper wire <table border="1"> <thead> <tr> <th>Code</th> <th>D_{MAX}</th> <th>$L1_{MAX}$</th> <th>$L2_{MIN}$</th> <th>$d \pm 0.05$</th> <th>$F \pm 0.05$</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>2</td> <td>3</td> <td>25</td> <td>0.35</td> <td>2</td> </tr> <tr> <td>3</td> <td>3</td> <td>4</td> <td>25</td> <td>0.4 / 0.5</td> <td>2</td> </tr> </tbody> </table>	Code	D_{MAX}	$L1_{MAX}$	$L2_{MIN}$	$d \pm 0.05$	$F \pm 0.05$	2	2	3	25	0.35	2	3	3	4	25	0.4 / 0.5	2			
		Code	D_{MAX}	$L1_{MAX}$	$L2_{MIN}$	$d \pm 0.05$	$F \pm 0.05$																
2	2	3	25	0.35	2																		
3	3	4	25	0.4 / 0.5	2																		
MF5A-3E		A. Tinned steel wire <table border="1"> <thead> <tr> <th>Code</th> <th>D_{MAX}</th> <th>$L1_{MAX}$</th> <th>$L2 \pm 1.5$</th> <th>d_{MAX}</th> <th>$F \pm 0.5$</th> <th>T_{MAX}</th> </tr> </thead> <tbody> <tr> <td>3E</td> <td>3.8</td> <td>9.5</td> <td>17</td> <td>5.0</td> <td>2.5</td> <td>3.5</td> </tr> <tr> <td>3P</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Code	D_{MAX}	$L1_{MAX}$	$L2 \pm 1.5$	d_{MAX}	$F \pm 0.5$	T_{MAX}	3E	3.8	9.5	17	5.0	2.5	3.5	3P						
		Code	D_{MAX}	$L1_{MAX}$	$L2 \pm 1.5$	d_{MAX}	$F \pm 0.5$	T_{MAX}															
3E	3.8	9.5	17	5.0	2.5	3.5																	
3P																							

B. Enameled wire

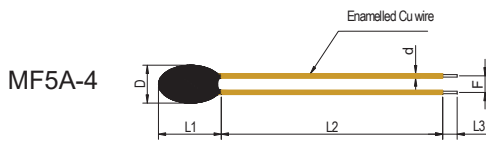

Code	D _{MAX}	L1 _{MAX}	L2 _{MIN}	L 3 ± 1	d ± 0.05	F ± 0.05
4	2	3	decided by user	5	0.2	2

C. High temperature Teflon wire

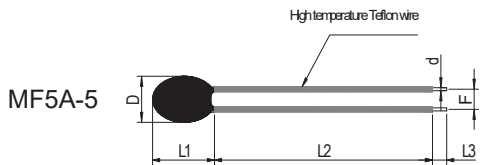

Code	D _{MAX}	L1 _{MAX}	L2 _{MIN}	L 3 ± 1	d ± 0.05	F ± 0.05
5T	3	5	decided by user	5	0.25	2.0
5P	4	5.5	decided by user	5	0.32	2.5
5C						

Ordering code

- MF5A X XXX X XXXX
 (1) (2) (3) (4) (5)
- Epoxy coating thermistor MF5A series
 - Lead wire style code :
 Model 2/3: Tin. Plated copper wire
 Model 4: Enameled wire
 Model 5: High temperature Teflon wire
 Model D: PVC insulation wire
 Model E: Tinned steel wire
 Model F: Customer require
 - Resistance value at 25°C
 - Resistance tolerance code : (F: ±1%, G: ±2%, H: ±3%, J: ±5%, K: ±10%)
 - Beta value

Electrical characteristics

Part No.	Rated Resistance R ₂₅	B Value (25/50°C)	Rated Power (mW)	Disst. Coef. (mW/°C)	Thermal time Constant (S)	Operating Temp. (°C)
MF52□□□3100	0.1 ~ 20	3100				
MF52□□□3270	0.2 ~ 20	3270				
MF52□□□3380	0.5 ~ 50	3380				
MF52□□□3470	0.5 ~ 50	3470				
MF52□□□3600	1 ~ 100	3600				
MF52□□□3950	5 ~ 100	3950	≤50	≥2.0 In Still Air	≤7 In Still Air	-55 ~ +125°C
MF52□□□4000	5 ~ 100	4000				
MF52□□□4050	5 ~ 200	4050				
MF52□□□4150	10 ~ 250	4150				
MF52□□□4300	20 ~ 500	4300				
MF52□□□4500	20 ~ 500	4500				

Notes:

- The 1st □ fills with code of dimension.
- The 2nd □ fills with rated resistance.
- The 3rd □ fills with its precision symbol.
- B value (25/50°C) tolerance: ±1%.
- Default resistance tolerance: ±1%.
- We will be able to supply products according to client's demands.