

# TITLE: TPA154-002V01

## Product Specification

ITEM	SIGNATURE	ITEM	SIGNATURE		
Prepared	陈小娇 刘晓龙 武迪	Checked	朱麾忠	李青永	湛志国
Approved	刘俊国				

**Beijing BOE Special Display Technology CO.,LTD**

## CONTENT LIST


Cover	1
Content List	2
Records Of Revisions	3
1. General Description	4
2. Absolute Maximum Ratings	6
3. Electrical Specification	6
4. Optical Specifications	7
5. Interface Connection	10
6. Signal Timing Specification	11
7. Input Signals Display Colors & Gray Scale of Colors	13
8. Power Sequence	14
9. Mechanical Characteristics	15
10. Reliability Test	17
11. Packing	18
12. Handling & Cautions	21



## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

15.4"1680X1050 is a color active matrix TFT-LCD model using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This model is composed of a TFT-LCD Panel and a driving circuit. It is a transmissive type display operating in the normal black. This TFT-LCD has a 15.4 inch diagonally measured active area with 1680X1050 resolutions. Each pixel is divided into RED, GREEN, BLUE dots which are arranged in 2 domain stripe and this panel can display 16.7M colors.

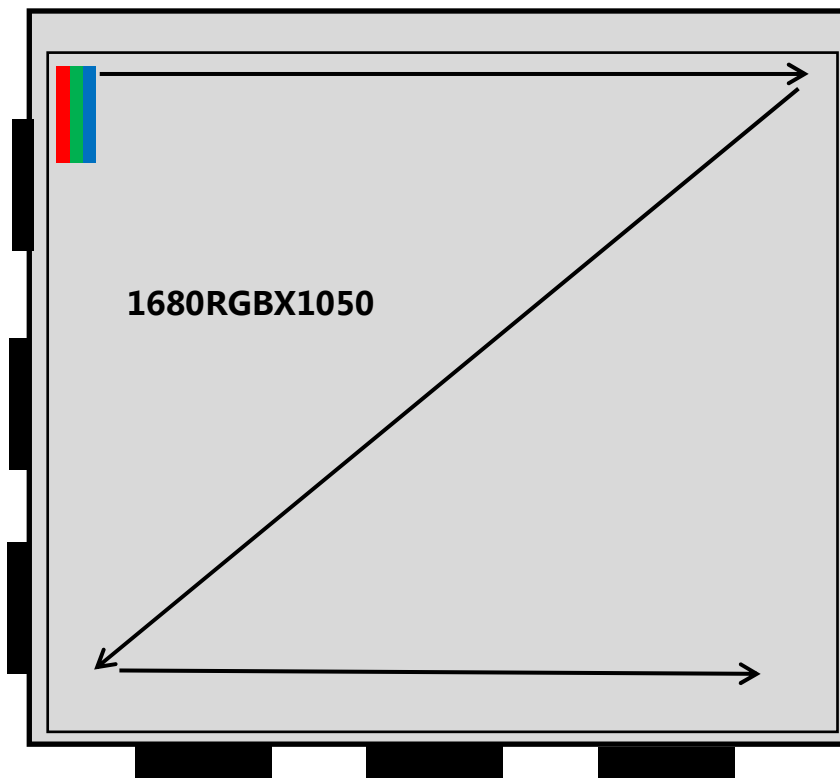

### 1.2 Features

- 0.5t Glass (Single)
- Wide operating temperature
- FOG Design
- Display 16.7M colors
- High contrast ratio, wide viewing angle

**1.3 General Specifications** (H: horizontal length, V: vertical length)

Parameter	Specification	Unit	Remark
Active Area	331.38(H) × 207.11(V)	mm	
Number of Pixels	1680 (H) RGB×1050(V)	pixels	
Pixel Pitch	197.25(H) × 197.25(V)	um	
Pixel Arrangement	RGB 2 domain stripe		
Display Colors	16.7M	colors	
Color Gamut	68%		
Display Mode	Normally black, Transmissive mode		
Dimensional Outline	340.5(H) × 218 (V) × 1.228(D)	mm	w/o PCBA
Viewing Direction (Human Eye )	U/D/L/R free viewing direction		Note1
Weight	300(max.)	g	Open cell
Surface Treatment	HC		

**Note:**

1. At the U/D/L/R direction, the viewing angle is same.

## 2.0 Absolute Maximum Ratings

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. Make sure all the design characteristics are adequate before the panel is initialed. All the measurements should be operated with driver IC and experimental FPC mounted.

[VSS = GND = 0V]

Parameter	Symbol	Min	Max	Unit	Remark
Operating Voltage	V <sub>op</sub>	4.6	5.5	V	Ta = 25°C
Operating Temperature	T <sub>OP</sub>	-40	+85	°C	
Storage Temperature	T <sub>ST</sub>	-55	+85	°C	
Operating Ambient Humidity	H <sub>op</sub>	20	80	%RH	*1)
Storage Humidity	H <sub>st</sub>	20	80	%RH	*1)

### Note:

\*1) Temp ≤ 40°C 90% RH MAX.

## 3.0 ELECTRICAL SPECIFICATION

Parameter	Symbol	Value			Unit	Remark
		min	typ	max		
Power Supply Voltage	V <sub>DD</sub>	4.6	5.0	5.5	V	
Power Supply Current	I <sub>DD</sub>	-	TBD		A	
Power Consumption	P <sub>D</sub>	-	TBD		W	
In-Rush Current	I <sub>RUSH</sub>	-	-	0.6	A	
Permissible Input Ripple Voltage	V <sub>RF</sub>	-	-	300	mV	
High Level Differential Input Threshold Voltage	V <sub>IH</sub>	-	-	+200	mV	
Low Level Differential Input Threshold Voltage	V <sub>IL</sub>	-200	-	-	mV	
Differential input voltage	V <sub>ID</sub>	100	-	600	mV	
Differential input common mode voltage	V <sub>cm</sub>	0.7	1.2	1.6	V	

## 4.0 OPTICAL SPECIFICATIONS

### 4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance  $\leq 1$  lux and temperature =  $25 \pm 2^\circ\text{C}$ ) with the equipment of Luminance meter system (Topcon SR-UL1R and Westar TRD-100A) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^\circ$ . The center of the measuring spot on the Display surface shall stay fixed.

The backlight should be operating for 30 minutes prior to measurement.

### 4.2 Optical Specifications

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle	Horizontal	$\Theta 3$	CR > 10	85	-	-	°	Note 1
		$\Theta 9$		85	-	-	°	
	Vertical	$\Theta 12$		85	-	-	°	
		$\Theta 6$		85	-	-	°	
Contrast Ratio		CR	$\Theta = 0^\circ$	800	1000	-	-	Note 2
Transmittance		T(%)	$\Theta = 0^\circ$	4.2	4.5	-	-	Note 3
NSTC(CIE1976)		%	$\Theta = 0^\circ$	68	70	-	-	
Reproduction Of color (CIE1976)	Red	$Ru'$	$\Theta = 0^\circ$	0.429	0.444	0.459		Note 4 Color filter Glass with OC (By Backlight of BOE)
		$Rv'$		0.502	0.517	0.532		
	Green	$Gu'$		0.103	0.118	0.133		
		$Gv'$		0.544	0.559	0.574		
	Blue	$Bu'$		0.157	0.172	0.187		
		$Bv'$		0.154	0.169	0.184		
White		$Wu'$	$\Theta = 0^\circ$	0.166	0.181	0.196		
		$Wv'$		0.412	0.427	0.442		
Response Time		Tr+Tf	$\Theta = 0^\circ$	-	25	30	ms	Note 5
Cross talk		-		-	-	2%		Fig.3

#### Note:

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIG.1). Viewing angle measuring is based on WV Pol attached.

2. Contrast measurements shall be made at viewing angle of  $\Theta = 0^\circ$  and at the center of the LCD surface.

Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See FIG.1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Transmittance is the value with Polarizer.

4. The color chromaticity coordinates specified in Table1 shall be calculated from The spectral data measured with all pixels first in red, green, blue and white.


Measurements shall be made at the center of the C/F.

Measurement condition is C - light source & Halogen Lamp

5. The electro-optical response time measurements shall be made as FIG.2 by switching the "data" input signal ON and OFF.

The times needed for the luminance to change from 10% to 90% is Tf, and 90% to 10% is Tr.

**Figure 1. Measurement Set Up**

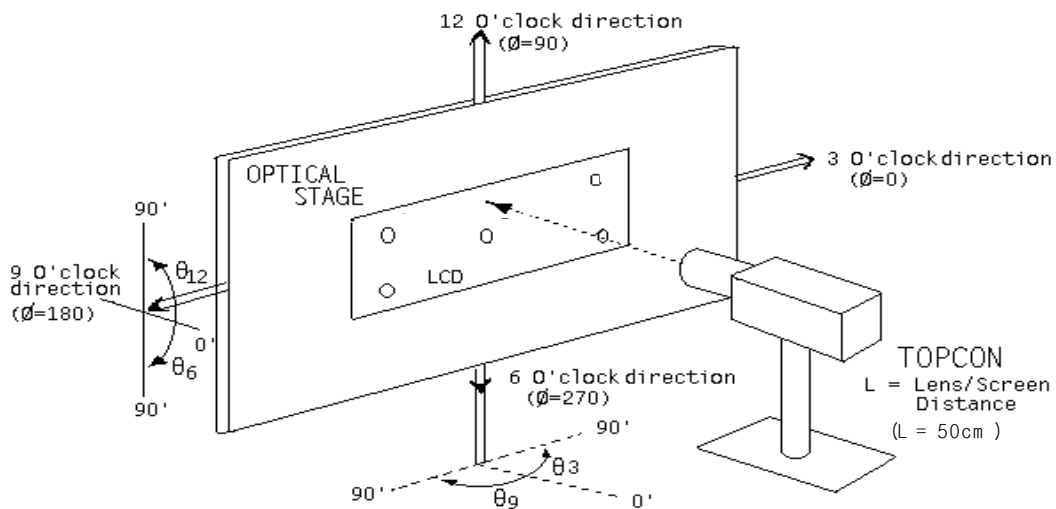

**Figure 2. Response Time Testing**


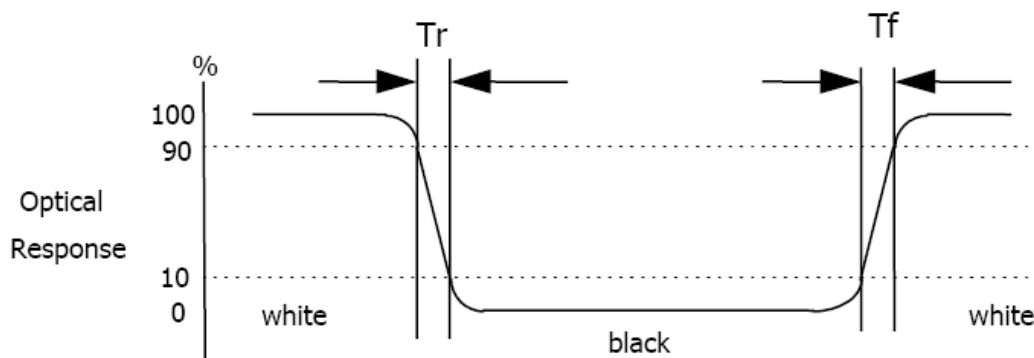


Figure 3. Cross Modulation Test Description

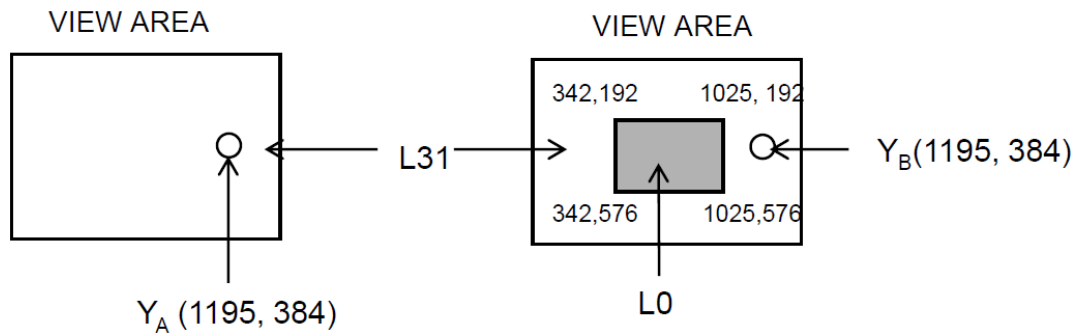

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

$Y_A$  = Initial luminance of measured area ( $\text{cd/m}^2$ )

$Y_B$  = Subsequent luminance of measured area ( $\text{cd/m}^2$ )

The location measured will be exactly the same in both patterns


## 5.0 INTERFACE CONNECTION

### 5.1 Electrical Interface Connection

The electronics interface connector is DF14-30P-1.25H or Compatible.

The connector interface pin assignments are listed as follow.


**Figure 4. Input Interface** (unit: mm if unspecified)

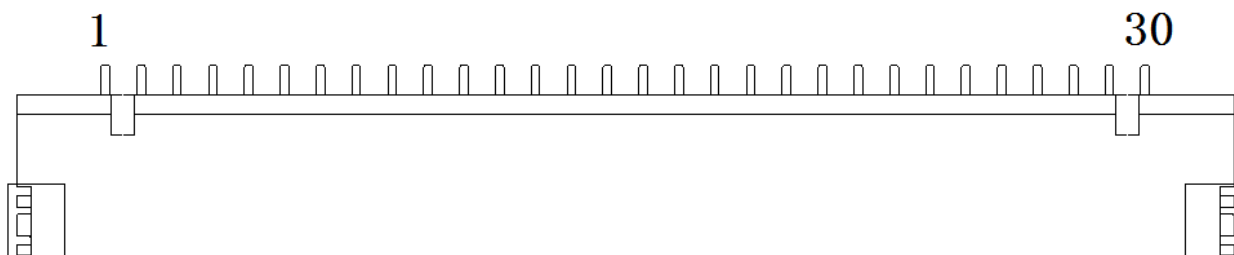

序号	定义	序号	定义
1	E_D0-	16	O_D1+
2	E_D0+	17	GND
3	E_D1-	18	O_D2-
4	E_D1+	19	O_D2+
5	E_D2-	20	O_CK2-
6	E_D2+	21	O_CK2+
7	GND	22	O_D3-
8	E_CK-	23	O_D3+
9	E_CK+	24	GND
10	E_D3-	25	SCL
11	E_D3+	26	SDA
12	O_D0-	27	GND
13	O_D0+	28	5V
14	GND	29	5V
15	O_D1-	30	5V


### 5.2 LVDS Input signal mapping

**Data input format (3-pair)**

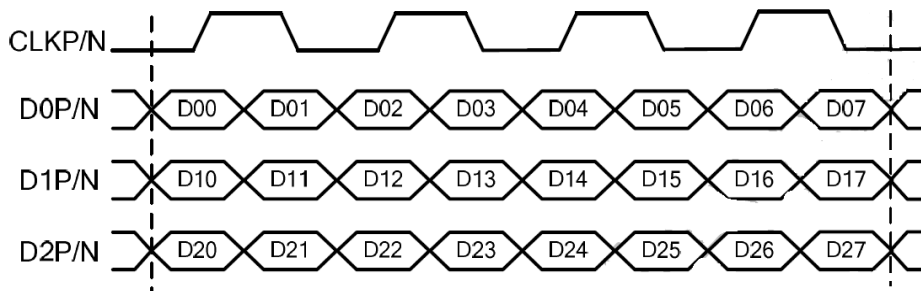

**3-Pair Mode**

**5.3 LVDS Input signal**

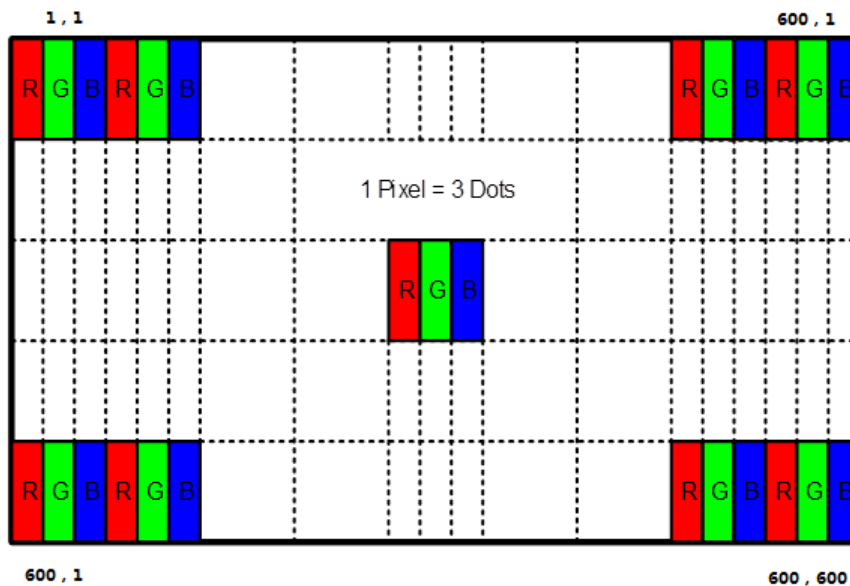

Display Position of Input Data (V-H)

## 6.0 SIGNAL TIMING SPECIFICATION

### 6.1 Timing Parameters

DE mode

Parameter	Symble	Typ	Unit
DCLK frequency	1/Tc	119	MHz
Frame frequency	Fv	60	Hz
Vertical total timing	Tv	1080	lines
Vertical active timing	Tvd	1050	lines
Horizontal total timing	Th	1840	clocks
Horizontal active timing	Thd	1680	clocks


### 7.0 Input Signals Display Colors & Gray Scale of Colors

Color & Gray Scale		Input Data Signal																							
		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Note: 0:Low Level Voltage, 1:High Level Voltage

## 8.0 Power Sequence

To prevent a latch-up or DC operation of the Open Cell, the power on/off sequence shall be as shown in below.

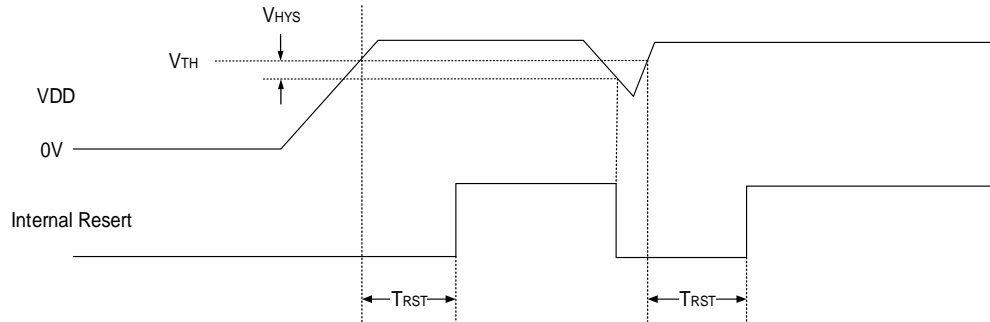

Symbol	Parameter	Condition	Spec			Unit
			Min	Typ	Max	
$V_{TH}$	Reset threshold voltage	-	1.7	1.9	2.1	V
$V_{HYS}$	Hysteresis voltage	-	200	-	-	mV
$T_{RST}$	Time constant of RC	-	-	0.8RC	-	s

## 9.0 Mechanical Characteristics

### 9.1 Dimensional Requirements

Parameter	Specification	Unit	Remark
Panel size	340.5(H) × 218(V)	mm	
CF size	338.1(H) × 214.5(V)	mm	
Active area	331.38(H) × 207.11(V)	mm	
Number of pixels	1680 (H) RGB × 1050(V)	pixels	
	(1 pixel = R + G + B dots)		
Pixel pitch	197(H) × 197(V)	um	
Pixel arrangement	RGB 2 domain stripe		
Dimensional outline	340.5(H) × 218 (V) × 1.228(D)	mm	OC
Display mode	Normally Black		


### 9.2 Mounting

See FIG.5.

### 9.3 Glare and Polarizer Hardness

The surface treatment of LCD is AG, and the Polarizer Hardness is 3H or more.

Figure 5. Open Cell Outline Dimensions ( unit: mm if unspecified)

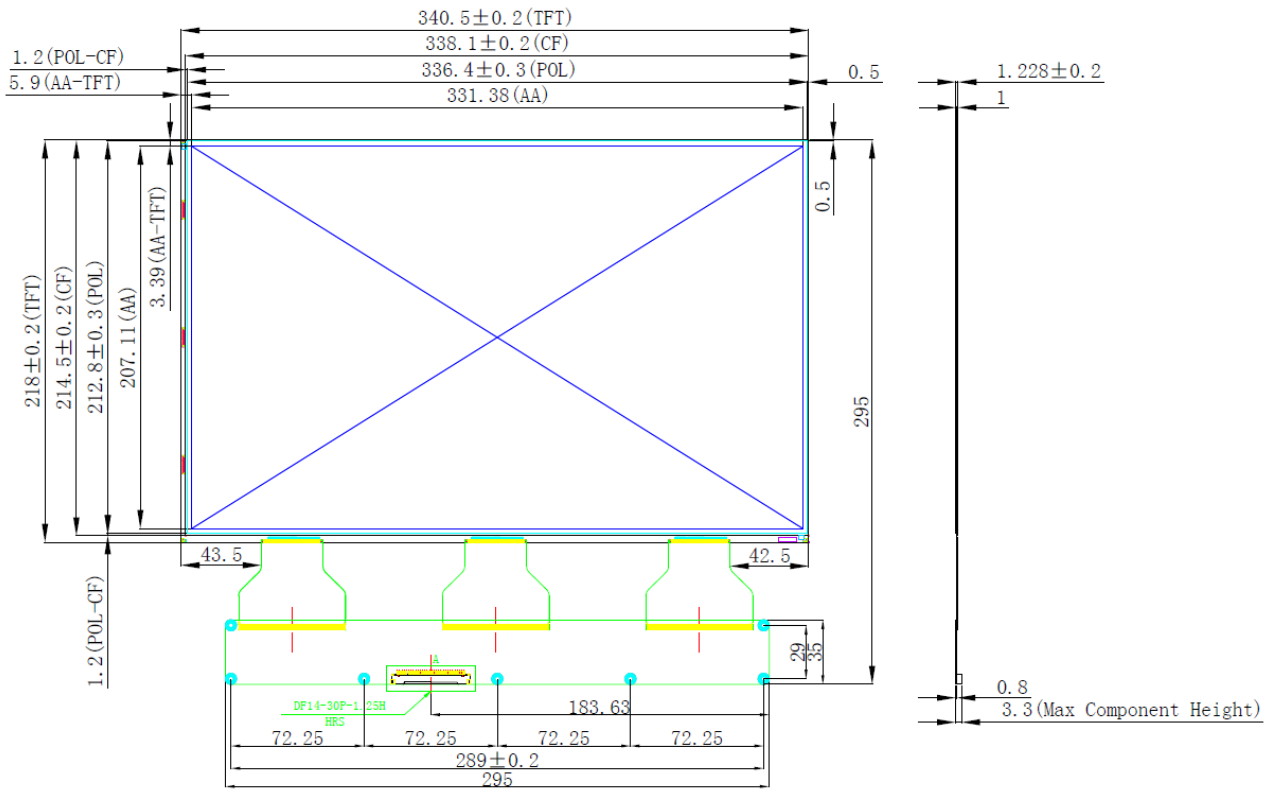

## 10.0 RELIABILITY TEST

NO	Test Item	Test Condition	Duration
1	Low temperature storage test(LTS)	-55℃	24hrs
	Low temperature operation test(LTO)	-40 ℃	2hrs
	High temperature storage test(HTS)	85 ℃	48hrs
	High temperature operation test(HTO)	85 ℃	2hrs
2	Thermal shock test (TST)	85 ℃: hold for 0.5hr -55 ℃: hold for 0.5hr	10 cycles
	High temperature, high humidity storage test(THS)	30℃~60℃, 95%	240hrs
3	High temperature operation test(HTO)	85 ℃	240hrs

## 11.0 PACKING

### 11.1 Tray packaging

Every piece of product is placed in a tray, and is padded with two tray spacers, as is shown in Fig6. Stack two pieces of products in turn, and stack an empty tray on top, as is shown in Fig7.

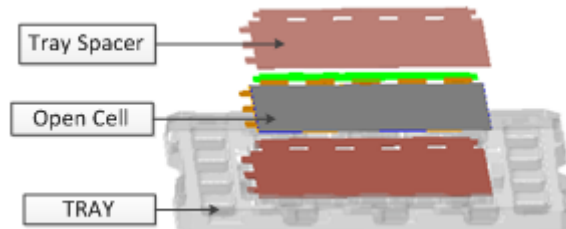


Fig 6

4 Full Tray and 2 Cover Tray<sup>+</sup>

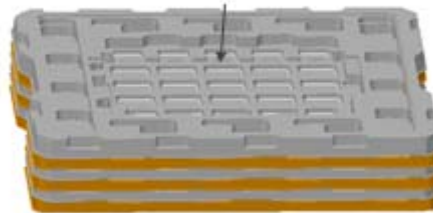


Fig 7

### 11.2 Carton packaging

Package Trays and products with PE bag with the method shown in Fig8. Put Protective spacer in the carton, as is shown in Fig9. Put the product in carton, and close the carton with Packaging tape, as is shown in Fig10.



Fig 8

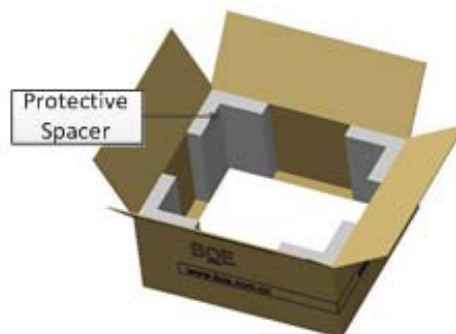


Fig 9



Fig 10

#### 11.4 Packing Notice

- Panel should be placed upwardly while in the box.
- Every spacer should be put under every panel.
- Panels should be packed in a vacuum with PE (anti-ESD) bag.

## 12.0 Handling & Cautions

### 12.1 Mounting Method

- The panel of the LCD consists of two thin glasses with polarizers which easily get damaged. So extreme care should be taken when handling the LCD.
- Excessive stress or pressure on the glass of the LCD should be avoided. Care must be taken to insure that no torsional or compressive forces are applied to the LCD unit when it is mounted.
- If the customer's set presses the main parts of the LCD, the LCD may show the abnormal display. But this phenomenon does not mean the malfunction of the LCD and should be pressed by the way of mutual agreement.
- To determine the optimum mounting angle, refer to the viewing angle range in the specification for each model.
- Mount a LCD module with the specified mounting parts.

### 12.2 Caution of LCD Handling and Cleaning

- Since the LCD is made of glass, do not apply strong mechanical impact or static load onto it. Handling with care since shock, vibration, and careless handling may seriously affect the product. If it falls from a high place or receives a strong shock, the glass maybe broken.
- The polarizer on the surface of panel are made from organic substances. Be very careful for chemicals not to touch the polarizer or it leads the polarizer to be deteriorated.
- If the use of a chemical is unavoidable, use soft cloth with solvent (recommended below) to clean the LCD's surface with wipe lightly.  
-IPA (Isopropyl Alcohol), Ethyl Alcohol, Tri-chloro, tri-florothane..
- Do not wipe the LCD's surface with dry or hard materials that will damage the polarizer, And others, Do not use the following solvent.  
-Water, acetone, Aromatics.
- It is recommended that the LCD be handled with soft gloves during assembly, etc. The polarizer on the LCD's surface are vulnerable to scratch and thus to be damaged by shape particles.
- Do not drop water or any chemicals onto the LCD's surface.
- A protective film is supplied on the LCD and should be left in place until the LCD is required for operation.
- The ITO pad area needs special careful caution because it could be easily corroded. Do not contact the ITO pad area with HCFC, Soldering flux, Chlorine, Sulfur, saliva or fingerprint. To prevent from the ITO corrosion, customers are recommended that the ITO area would be covered by UV or silicon.
- Please clean the LCD without ultrasonic to avoid line open

### 12.3 Caution Against Static Charge

- The LCD modules use C-MOS LSI drivers, so customers are recommended that any unused

input terminal would be connected to Vdd or Vss, do not input any signals before power is turn on, and ground you body, work/assembly area, assembly equipments to protect against static electricity.

- Remove the protective film slowly, keeping the removing direction approximate 30-degree not vertical from panel surface, if possible, under ESD control device like ion blower, and the humidity of working room should be kept over 50%RH to reduce the risk of static charge.
- Avoid the use work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
- In handling the LCD, wear non-charged material gloves. And the conducting wrist to the earth and the conducting shoes to the earth are necessary.

### 12.4 Caution For operation

- It is indispensable to drive the LCD within the specified voltage limit since the higher voltage than the limit causes the shorter LCD's life. An electro-chemical reaction due to DC causes undesirable deterioration of the LCD so that the use of DC drive should avoid.
- Do not connect or disconnect the LCD to or from the system when power is on.
- Never use the LCD under abnormal conditions of high temperature and high humidity.
- When expose to drastic fluctuation of temperature(hot to cold or cold to hot) ,the LCD may be affected; specifically, drastic temperature fluctuation from cold to hot, produces dew on the LCD's surface which may affect the operation of the polarizer and the LCD.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD may turn black at temperature above its operational range. However those phenomena do not mean malfunction or out of order with the LCD. The LCD will revert to normal operation once the temperature returns to the recommended temperature range for normal operation.
- Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.

### 12.5 Packaging

- Modules use LCD element, and must be treated as such.
- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed directly to sunshine or high temperature/humidity for long periods.

### 12.6 Storage

- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit. Relative humidity of the environment should therefore be kept below 60%RH.
- Original protective film should be used on LCD's surface (polarizer). Adhesive type protective film should be avoided, because it may change color and/or properties of the polarizer.
- Do not store the LCD near organic solvents or corrosive gasses.

- Keep the LCD safe from vibration, shock and pressure.
- Black or white air-bubbles may be produced if the LCD is stored for long time in the lower temperature or mechanical shocks are applied onto the LCD.
- In the case of storing for a long period of time for the purpose or replacement use, the following ways are recommended.
  - Store in a polyethylene bag with sealed so as not to enter fresh air outside in it.
  - Store in a dark place where neither exposure to direct sunlight nor light is.
  - Keep temperature in the specified storage temperature range.
  - Store with no touch on polarizer surface by the anything else. If possible, store the LCD in the packaging situation LCD when it was delivered.

### 12.7 Safety

- For the crash damaged or unnecessary LCD, it is recommended to wash off liquid crystal by either of solvents such as acetone and ethanol and should be burned up later.
- In the case the LCD is broken, watch out whether liquid crystal leaks out or not. If your hands touch the liquid crystal, wash your hands cleanly with water and soap as soon as possible.
- If you should swallow the liquid crystal, first, wash your mouth thoroughly with water, then drink a lot of water and induce vomiting, and then, consult a physician.
- If the liquid crystal gets in your eyes, flush your eyes with running water for at least fifteen minutes.
- If the liquid crystal touches your skin or clothes, remove it and wash the affected part of your skin or clothes with soap and running water.