
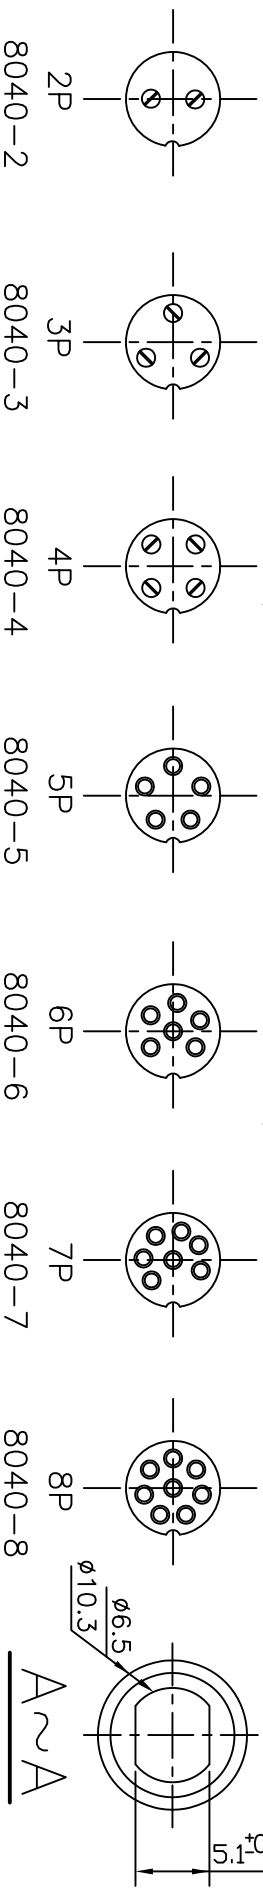


RoHS


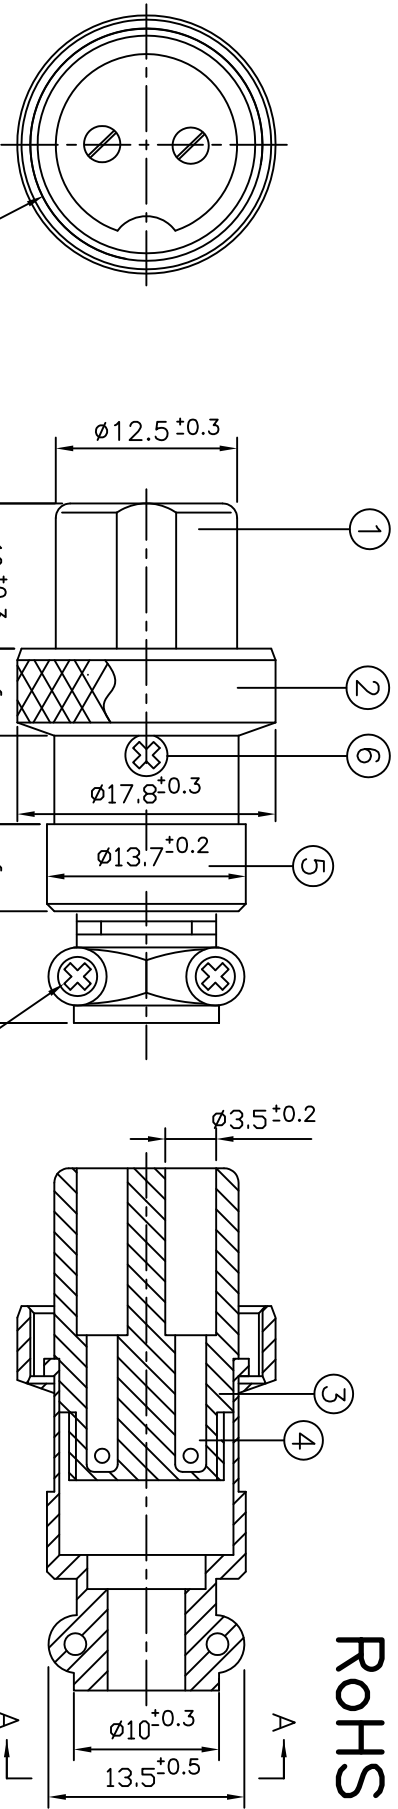


CHARACTERISTIC OF Electric	
Withstand Voltage	AC 1000V
Insulation Resistance	100MΩ MIN
Rating	5A125V/250V
Current	5A

7	SCREW	1	IRON	Ni				
6	SCREW	1	IRON	Ni				
5	COVER	1	ZINC ALLOY	Ni				
4	CONDUCTOR	2	BRASS	Ni				
3	INSULATION RING	1	PE					
2	INSULATOR	1	BRASS	Ni				
1	INSULATOR	1	PHENOLIC RESIN					
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION				REMARK
DRAW BY	CHUN	121510						8040-2
DEGN BY	YANG							
APPD BY	RAY							

DATE	DRAWG BY	REVISED	△	同利企業有限公司	TELE LONG ENTERPRISE CO.,LTD	DWG NO.	8040-2-CN36-A1

E-mail: rayyang@seed.net.tw FAX. 886-6-2530232

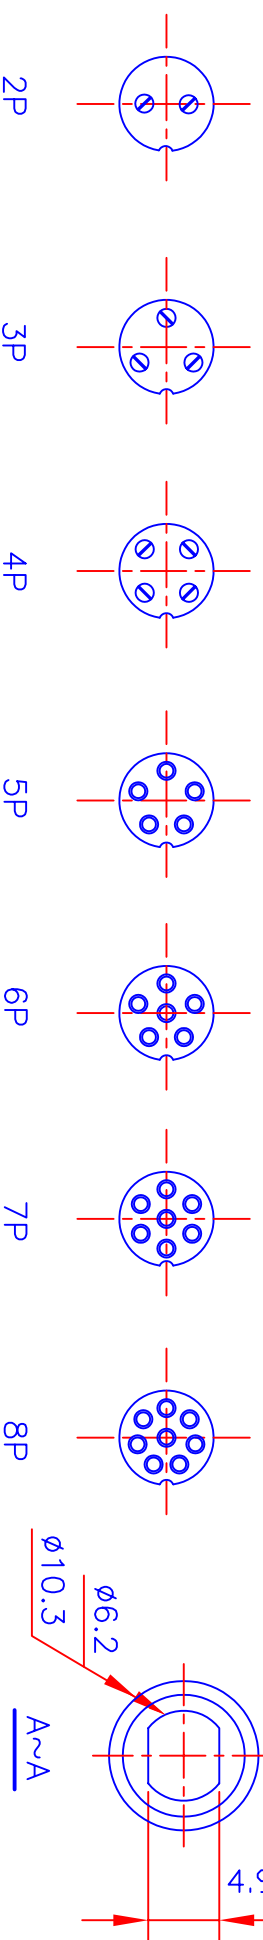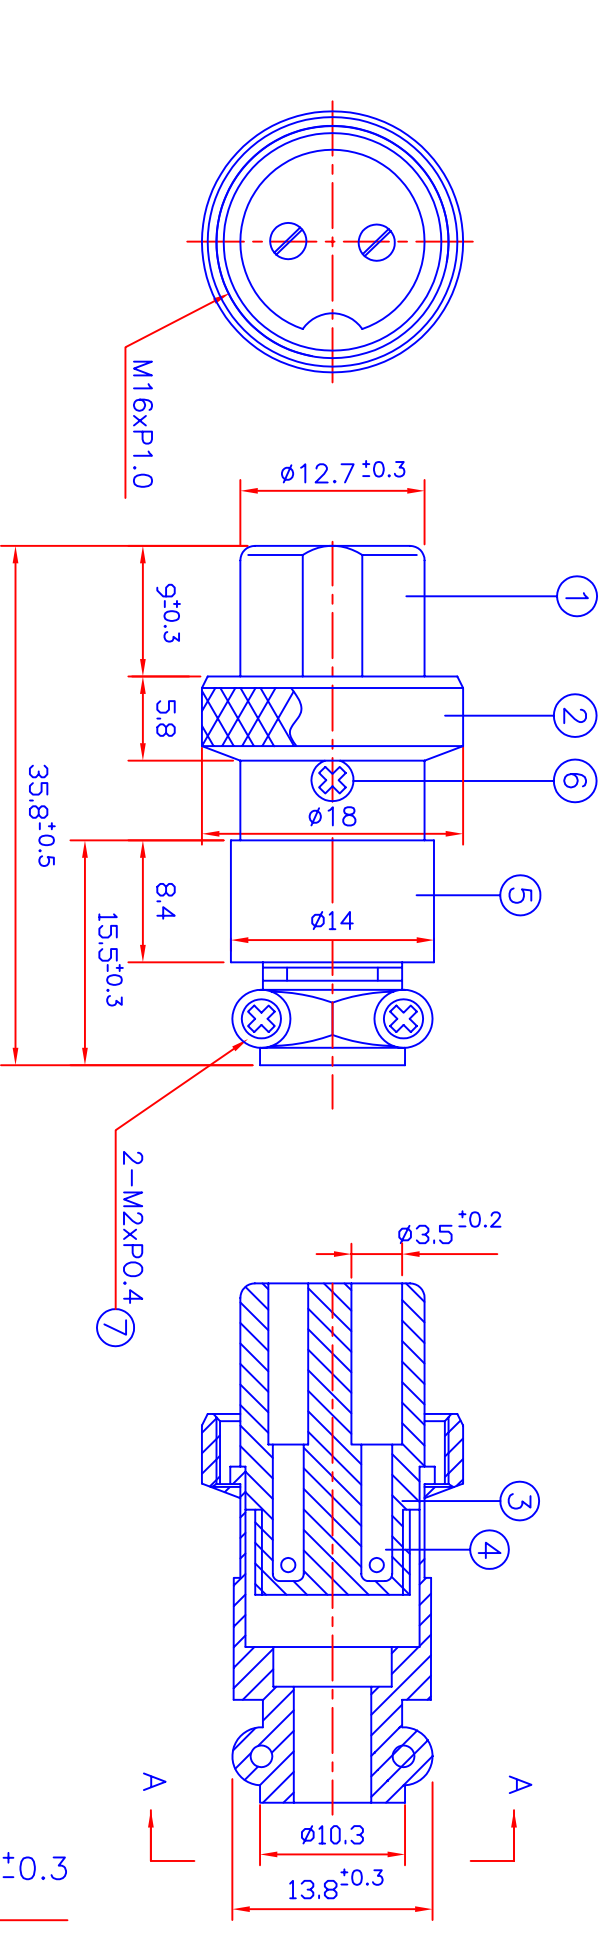

CHARACTERISTIC OF Electric	
Withstand Voltage	AC1000V
Insulation Resistance	100MΩ MIN
Rating	5A125V/250V
Current	5A

7	SCREW	1	IRON		Ni	
6	SCREW	1	IRON		Ni	
5	COVER	1	ZINC ALLOY		Ni	
4	CONDUCTOR	2	BSP		Ni	
3	INSULATION RING	1	PE BS		Ni	
2	INSULATION RING	1	PE BS		Ni	
1	INSULATOR	1	PHENOLIC RESIN		Ni	
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	TREAT	REMARK
DRAW BY	周佩君	070607				
DEGN BY						
APPD BY						
		SCALE	2 : 1	PROJ		ITEM NO. 8040-2
		UNIT	MM			MIC CONNECTOR

DATE	DRAWG BY	REVISED	△	同利企業有限公司	TELE LONG ENTERPRISE CO.,LTD	DRAWING NO. 8040-2-TN01-A
				同利企業有限公司	TEL. 886-6-2530201	
				E-mail: rayyang@seed.net.tw	FAX. 886-6-2530232	