



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/07/06'		LJC 07/07/06'
B	DRAWING UPDATE	JLZ 05/21/18'		

MALE

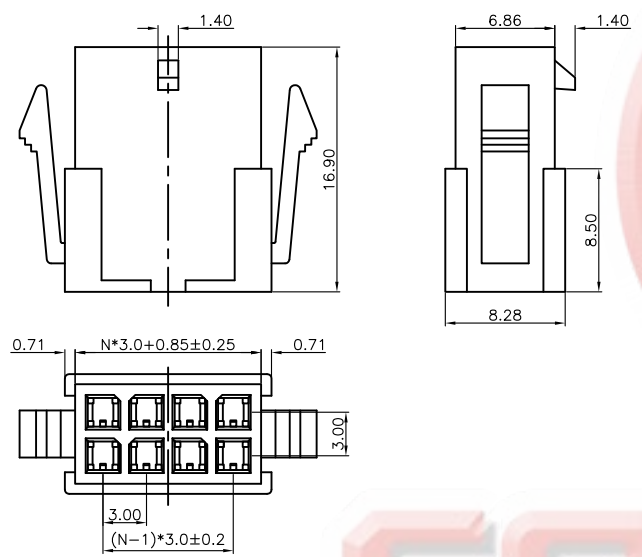

N=No.of Holes/2

Male TERMINAL



NOTES:


- MAIN SPECIFICATIONS
 - Housing material: NYLON
 - Rated voltage: 250V
 - Rated current: 3A
 - Contact resistance: 100mΩ Max
 - Insulation resistance: 1000MΩ Min
 - Withstanding voltage: 500V,AC 1 minute
 - Temperature range: -25°C ~ +85°C
- PRODUCT NUMBER CODE:

Housing:

I - DS1073-03 - X X X 0 X


- No. of Holes: 02*1~02*12
- Housing Color: B: Black, T: Transparent
- Mounting type: C: Crimp type
- Housing type: P: Male, S: Female

FEMALE

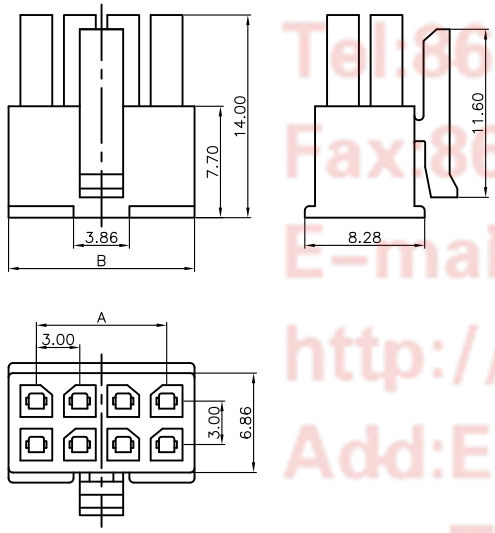

N=No.of Holes/2

Female TERMINAL



Terminal:

T - DS1073-03 - X X 6 0 0

- Plating type: 6: Tin
- Mounting type: C: Crimp type
- Terminal type: P: Male, S: Female

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	MICRO ATX CONNECTOR
.X ±0.38	.X ±3°	A4	PITCH 3.0mm Crimp Type
.XX ±0.25	.XX ±2°	SHEET SIZE	SERIES DS1073-03 SERIES
DRAWING TYPE	CUSTOMER	晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1073-03-XXXXX-B		