



Ver.	modify NO.	Details	Area	P.I.C	Date

Top View

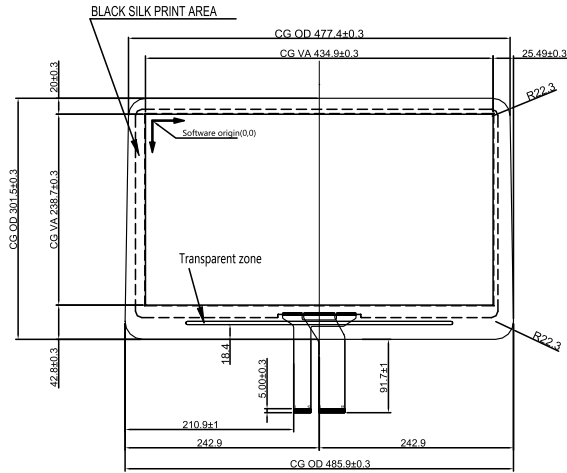


Scale 2:1

Side View



Bottom View

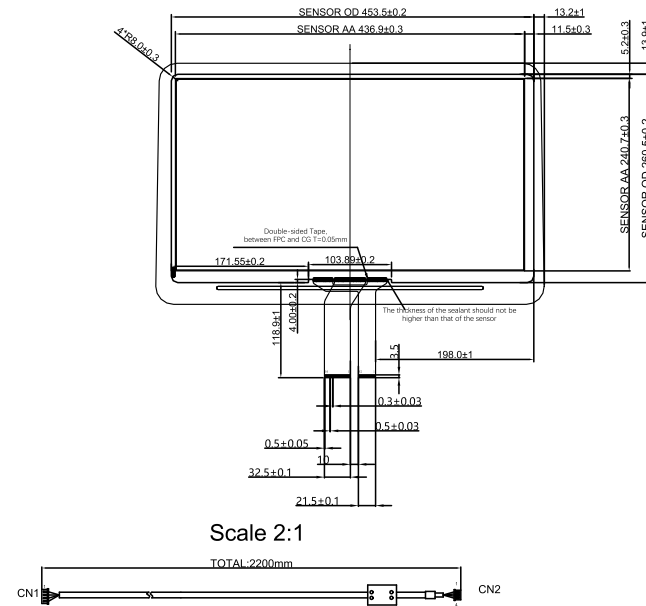


Connector:
 CN1:2.0 Pitch 4pin housing
 CN2:1.25 Pitch 4pin housing

CN1	CN2	COLOR	Signal
1	1	RED	VCC
2	3	WHITE	D-
3	2	GREEN	D+
4	4	BLACK	GND

Technical parameter:

1. Structure type: GFF
2. Glass: T=3.0mm Tempered Glass
Surface Hardness: ≥6H
3. Controller: BTP-GFF-CTR-ILI-195B-J01 COB
4. Controller IC: LI2510 RX:60(7.28) TX:34(7.08)
5. Light transmission: ≥80%
6. Operating temperature: -20°C~+70°C, ≤85%RH
7. Storage temperature: -30°C~+80°C, ≤85%RH
8. Unmarked tolerance: ±0.5mm
9. All material used conform to RoHS standards

GFF Joint way

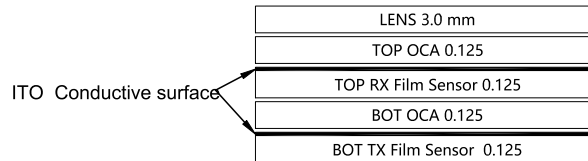

Part No.	BTP-GFF-TPB-19.5-ILI-J01		
Product Name: 19.5inch Touch Panel	Drawing No.	F195221108J01	
	Project Code.	F195J01	
Designed by: Curry.Wang Checked by: Betty.Fu Approved by: Cale.Chen	Business Unit:	SNT-BTP	Ratio
	Period Mark	A	1:1
Workmanship: Li.Zai	BOM Code	1.13.195.05.0201	Page 1
Standardization: Link.Chen	Product Series	BTP-GFF	Total 1 Page
Released by: Rocky.Liu	思诺泰科创电子(苏州)有限公司 SINOTRONICS INC.		