

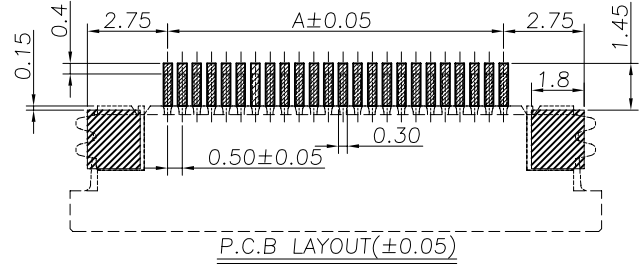
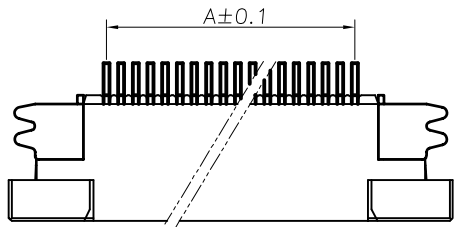

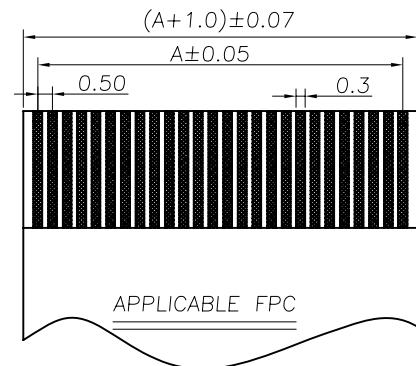

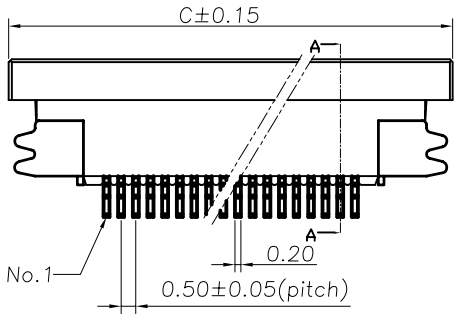



REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2017.11.30	李全燊



Specifications
 Current Rating:0.5AMPS
 Volatge Rating:50V AC DC
 Dielectric Withstanding Volatge:
 500VAC/Minute
 Contact Resistance:30mΩ Max.
 Insulation Resistance:500MΩ Min.
 Operating Temperature:-25°C to +85°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP(Nylon) or
 the equivalent material
 All materials must meet GREENCONN
 hazardous substances control standards.



No. of PINS	Dimension Information			No. of PINS	Dimension Information		
	A	B	C		A	B	C
4	1.5	2.56	8.2	33	16.0	17.06	22.7
5	2.0	3.06	8.7	34	16.5	17.56	23.2
6	2.5	3.56	9.2	35	17.0	18.06	23.7
7	3.0	4.06	9.7	36	17.5	18.56	24.2
8	3.5	4.56	10.2	37	18.0	19.06	24.7
9	4.0	5.06	10.7	38	18.5	19.56	25.2
10	4.5	5.56	11.2	39	19.0	20.06	25.7
11	5.0	6.06	11.7	40	19.5	20.56	26.2
12	5.5	6.56	12.2	41	20.0	21.06	26.7
13	6.0	7.06	12.7	42	20.5	21.56	27.2
14	6.5	7.56	13.2	43	21.0	22.06	27.7
15	7.0	8.06	13.7	44	21.5	22.56	28.2
16	7.5	8.56	14.2	45	22.0	23.06	28.7
17	8.0	9.06	14.7	46	22.5	23.56	29.2
18	8.5	9.56	15.2	47	23.0	24.06	29.7
19	9.0	10.06	15.7	48	23.5	24.56	30.2
20	9.5	10.56	16.2	49	24.0	25.06	30.7
21	10.0	11.06	16.7	50	24.5	25.56	31.2
22	10.5	11.56	17.2	51	25.0	26.06	31.7
23	11.0	12.06	17.7	52	25.5	26.56	32.2
24	11.5	12.56	18.2	53	26.0	27.06	32.7
25	12.0	13.06	18.7	54	26.5	27.56	33.2
26	12.5	13.56	19.2	55	27.0	28.06	33.7
27	13.0	14.06	19.7	56	27.5	28.56	34.2
28	13.5	14.56	20.2	57	28.0	29.06	34.7
29	14.0	15.06	20.7	58	28.5	29.56	35.2
30	14.5	15.56	21.2	59	29.0	30.06	35.7
31	15.0	16.06	21.7	60	29.5	30.56	36.2
32	15.5	16.56	22.2				

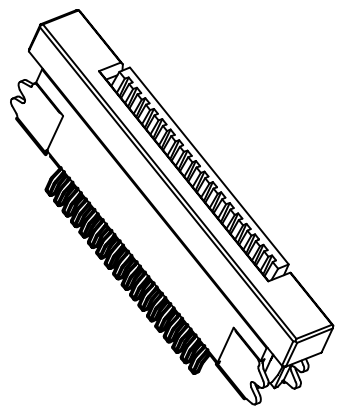

Ordering Information

C FAD102 - XX XX A 053 C X S X-06
 No. of Pins per Row 04~60 Standard Plating 01=Tin Color 2=White Standard Packing D=Tape&Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±3.0°	X.±
.X*±1.0°	.X±0.25
.XX*±	.XX±0.12
.XXX*±	.XXX±0.05

DESIGNED: 李全燊	DATE: 2017.11.30
CHECKED: 林泽云	DATE: 2017.11.30
APPROVED: link	DATE: 2017.11.30

DWG. NO.	CFAD102-CA53CS
PART NO.	CFAD102-XXXXA053CX SX-06

TITLE.	Pitch 0.5MM FPC 90° SMT
--------	-------------------------

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1