



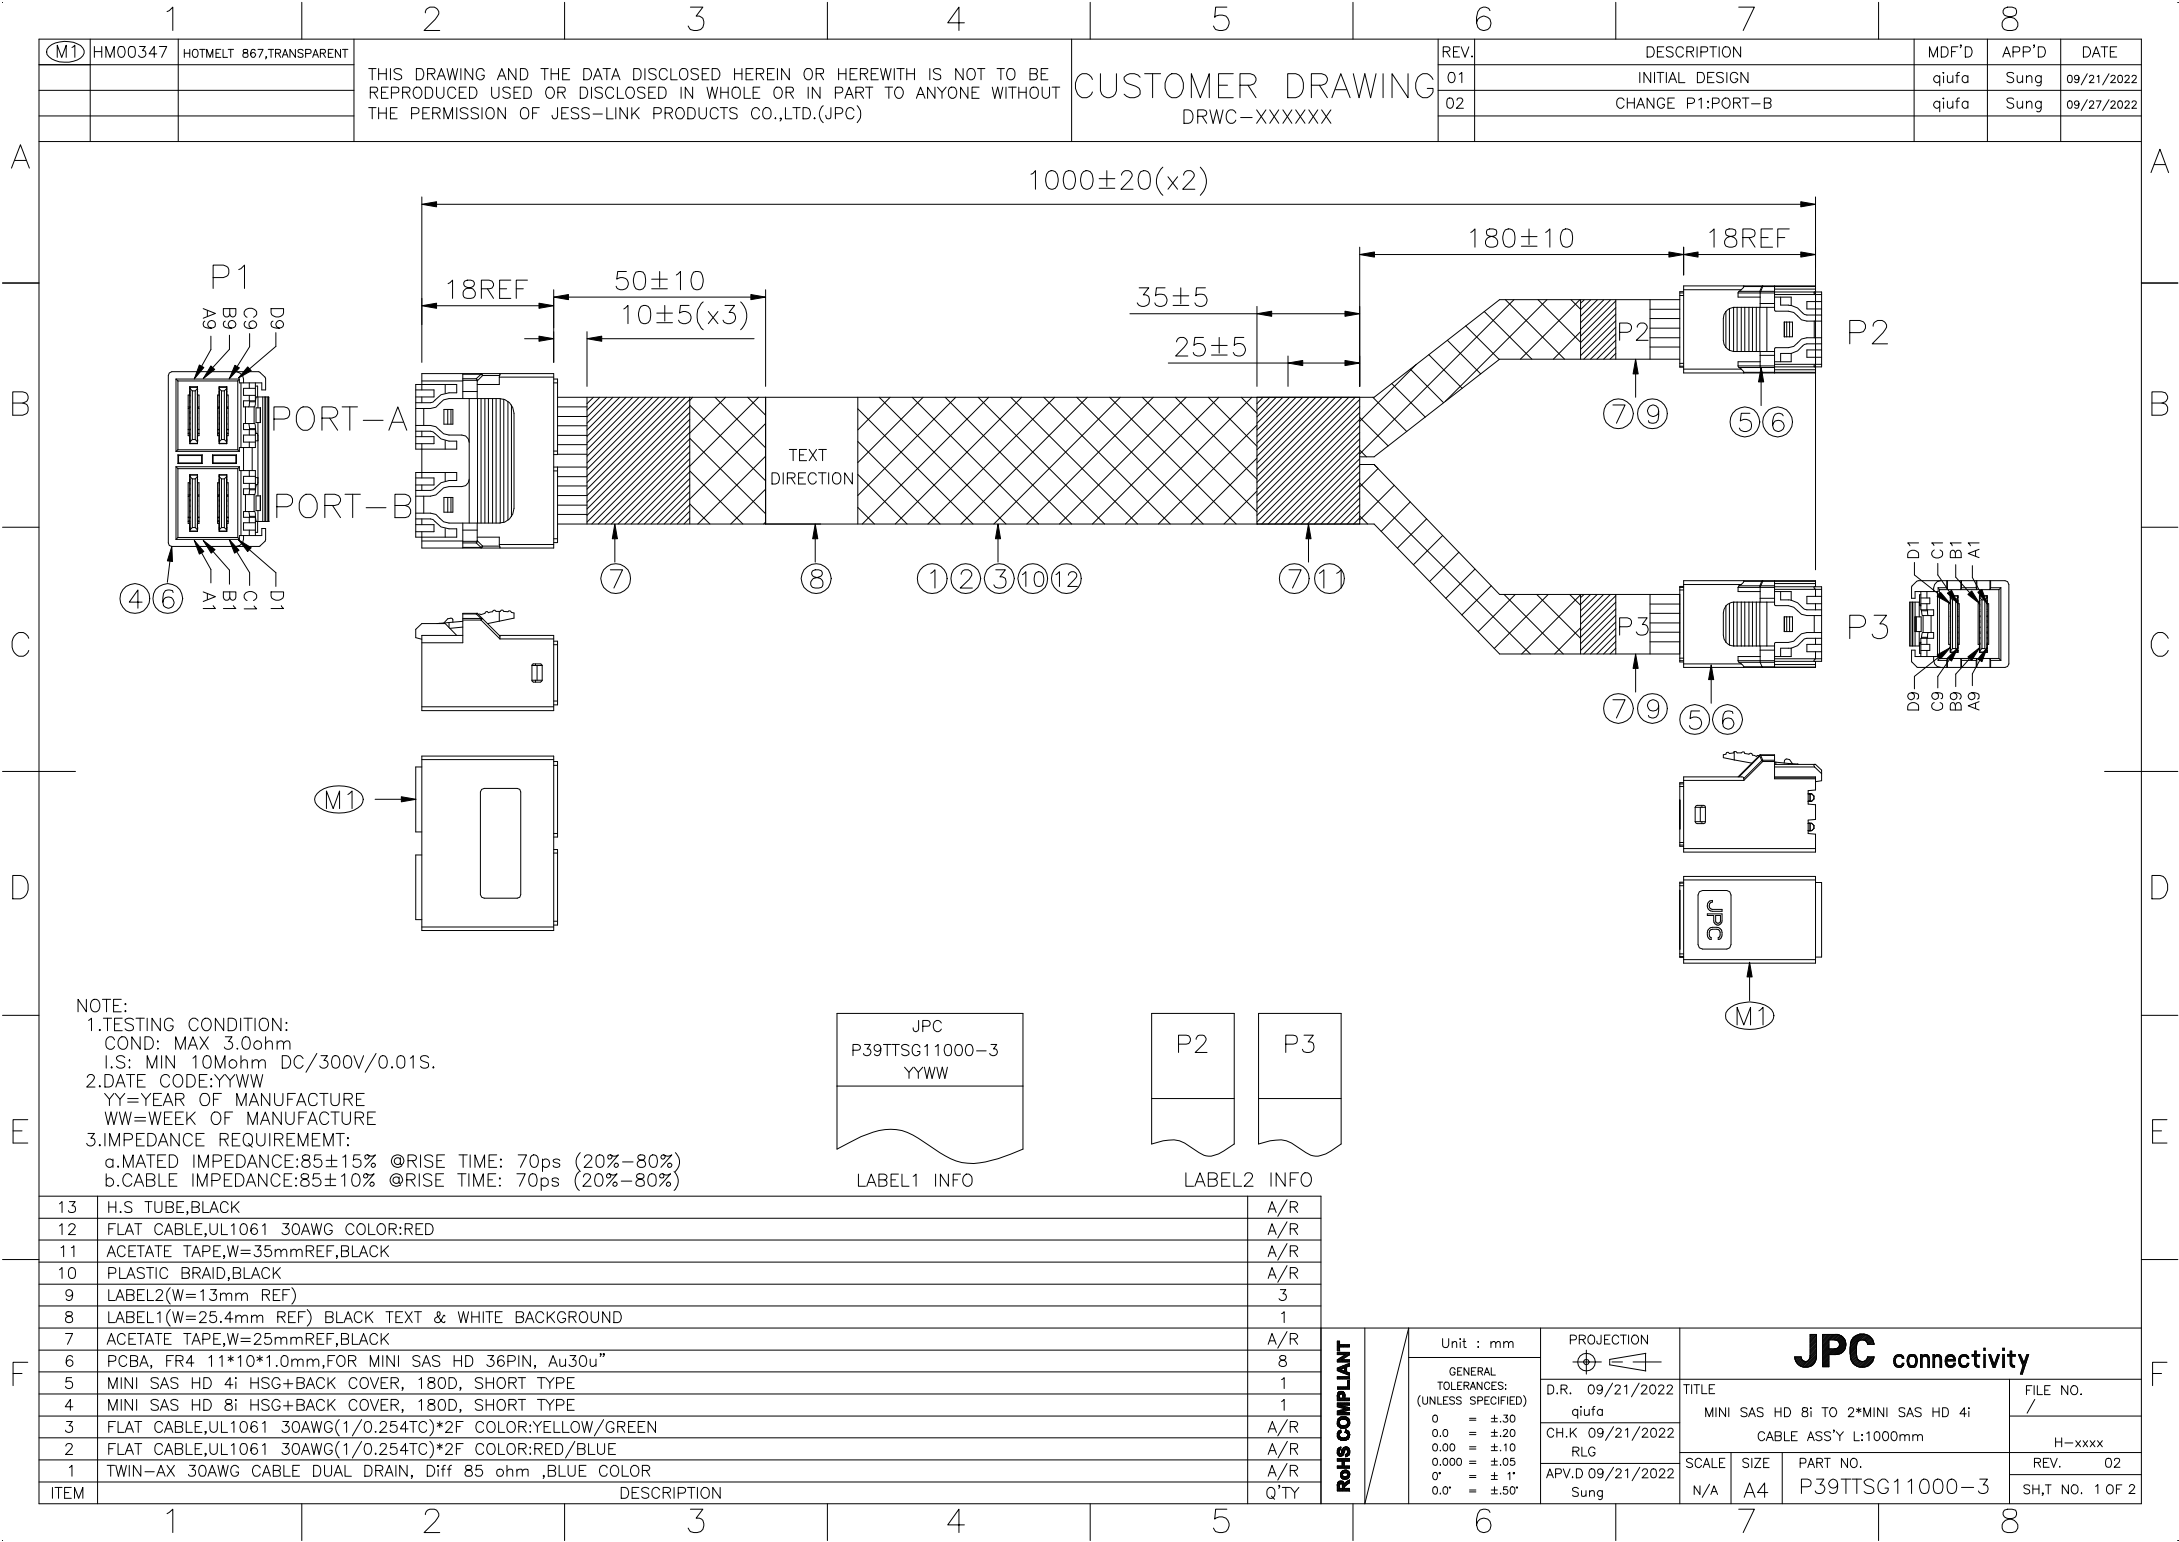




1		2		3		4		5		6		7		8	
M1	HM00347	HOTMELT 867,TRANSPARENT	THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)					CUSTOMER DRAWING DRWC-XXXXXX		REV.	DESCRIPTION		MDF'D	APP'D	DATE
										01	INITIAL DESIGN		qiufa	Sung	09/21/2022
										02	CHANGE P1:PORT-B		qiufa	Sung	09/27/2022

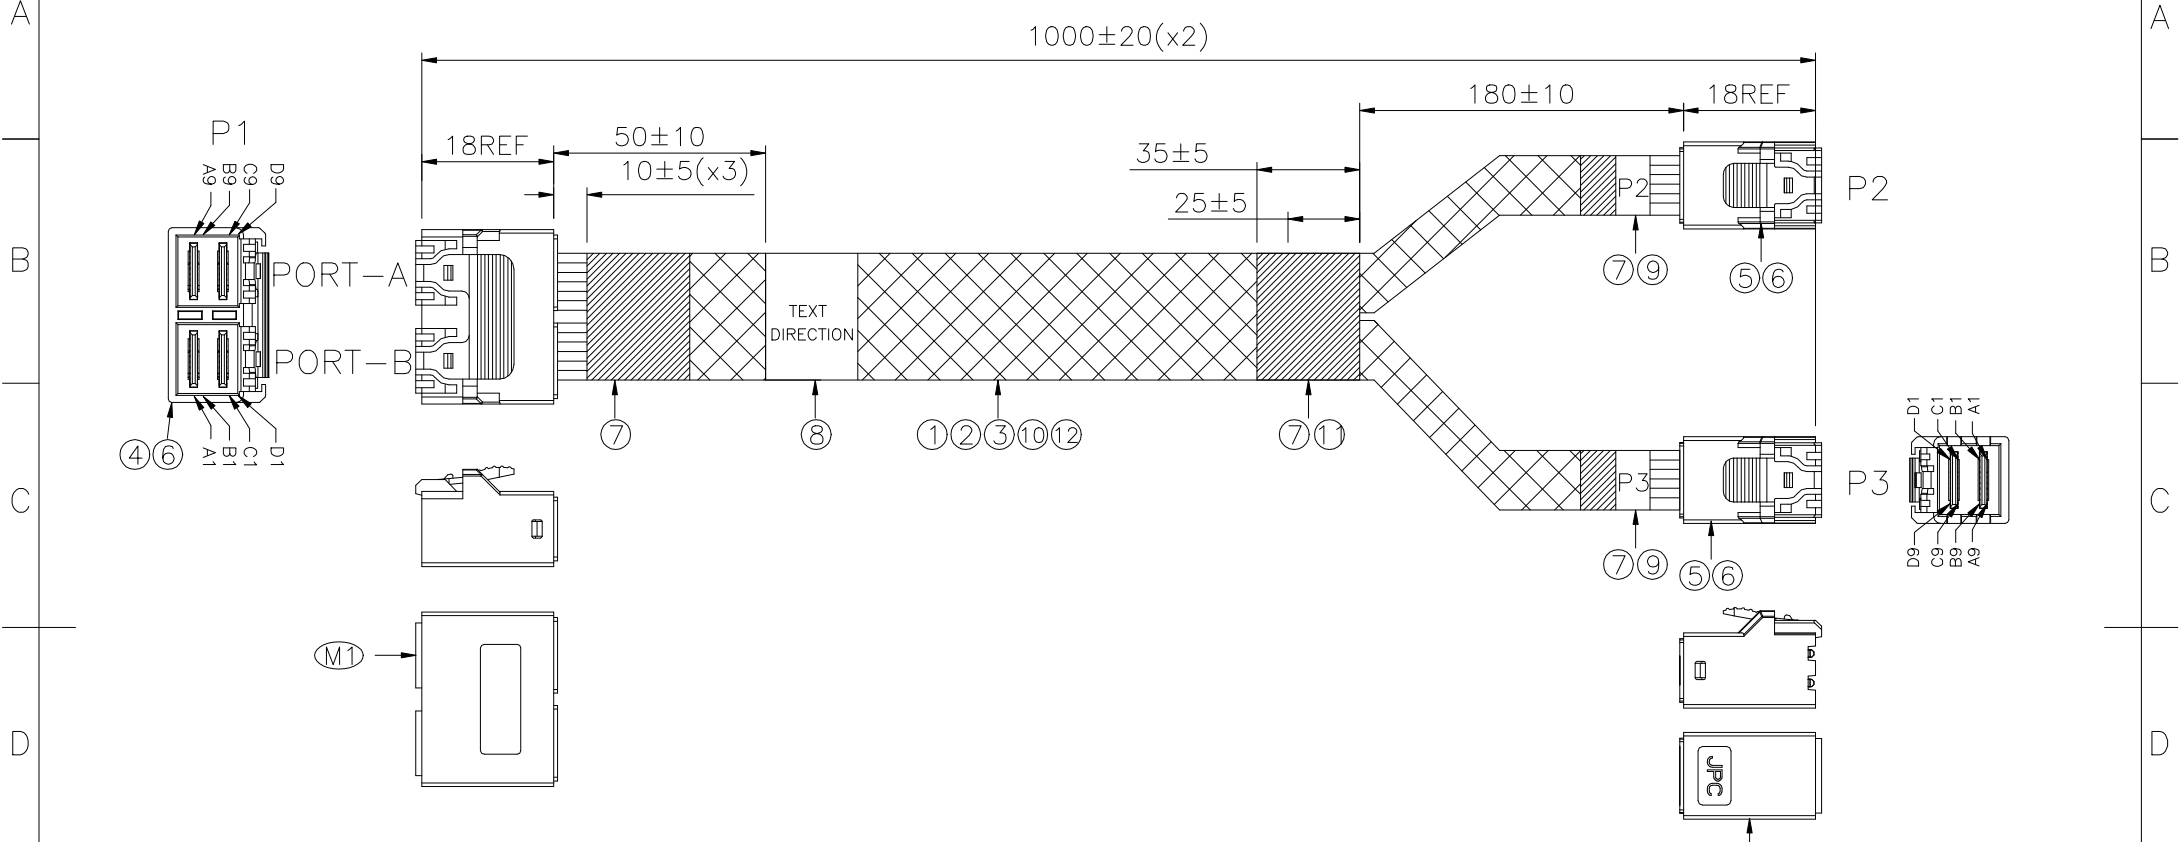

NOTE:		1. TESTING CONDITION:		COND: MAX 3.0ohm		I.S: MIN 10Mohm DC/300V/0.01S.		2. DATE CODE:YYWW		YY=YEAR OF MANUFACTURE		WW=WEEK OF MANUFACTURE		3. IMPEDANCE REQUIREMENT:		a. MATED IMPEDANCE:85±15% @RISE TIME: 70ps (20%-80%)		b. CABLE IMPEDANCE:85±10% @RISE TIME: 70ps (20%-80%)	
13		H.S TUBE,BLACK																	
12		FLAT CABLE,UL1061 30AWG COLOR:RED																	
11		ACETATE TAPE,W=35mmREF,BLACK																	
10		PLASTIC BRAID,BLACK																	
9		LABEL2(W=13mm REF)																	
8		LABEL1(W=25.4mm REF) BLACK TEXT & WHITE BACKGROUND																	
7		ACETATE TAPE,W=25mmREF,BLACK																	
6		PCBA, FR4 11*10*1.0mm,FOR MINI SAS HD 36PIN, Au30u"																	
5		MINI SAS HD 4i HSG+BACK COVER, 180D, SHORT TYPE																	
4		MINI SAS HD 8i HSG+BACK COVER, 180D, SHORT TYPE																	
3		FLAT CABLE,UL1061 30AWG(1/0.254TC)*2F COLOR:YELLOW/GREEN																	
2		FLAT CABLE,UL1061 30AWG(1/0.254TC)*2F COLOR:RED/BLUE																	
1		TWIN-AX 30AWG CABLE DUAL DRAIN, Diff 85 ohm ,BLUE COLOR																	
ITEM				DESCRIPTION															

RoHS COMPLIANT		Unit : mm		PROJECTION		JPC connectivity	
		GENERAL TOLERANCES: (UNLESS SPECIFIED)		D.R. 09/21/2022		TITLE	
		0 = ±.30 0.0 = ±.20 0.00 = ±.10 0.000 = ±.05 0" = ± .1" 0.0" = ±.50"		qiufa		MINI SAS HD 8i to 2*MINI SAS HD 4i	
				CH.K 09/21/2022		CABLE ASS'Y L:1000mm	
				RLG		SCALE	
				APV.D 09/21/2022		SIZE	
				Sung		PART NO.	
						N/A	
						A4	
						P39TTSG11000-3	
						FILE NO.	
						H-xxxx	
						REV. 02	
						SH,T NO. 1 OF 2	

WIRING TABLE

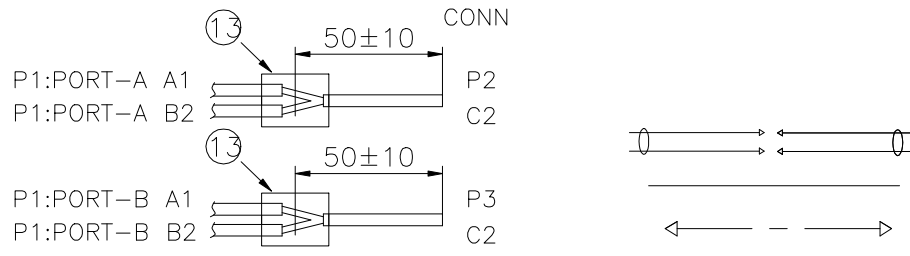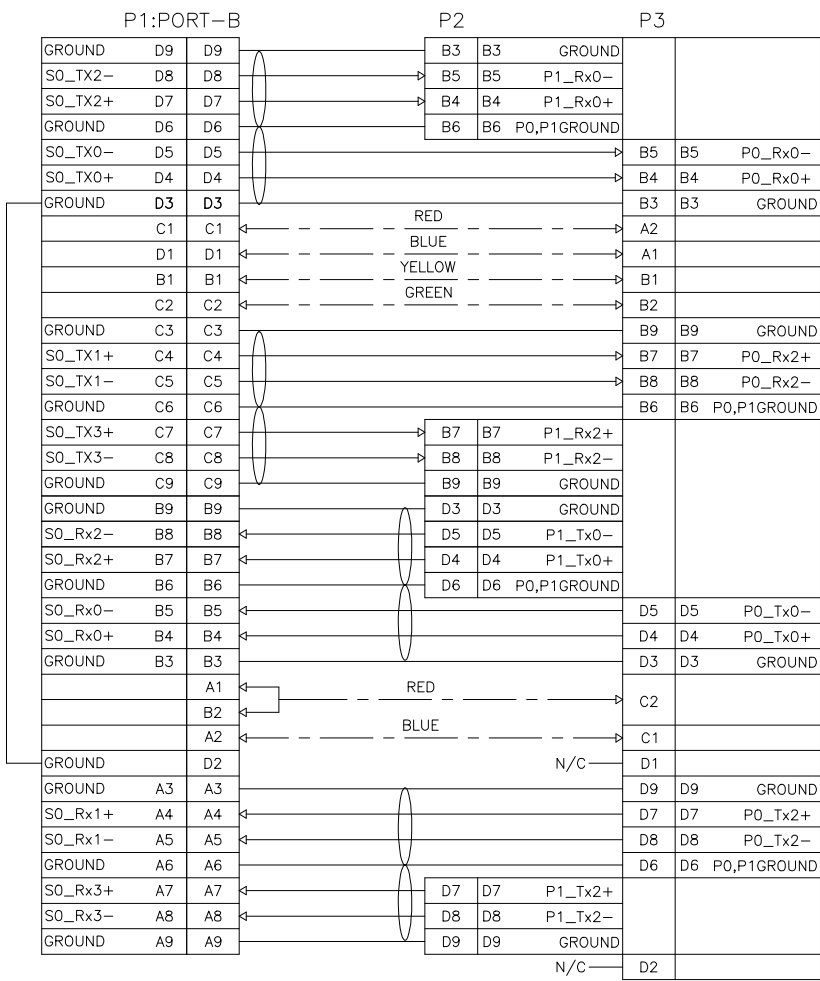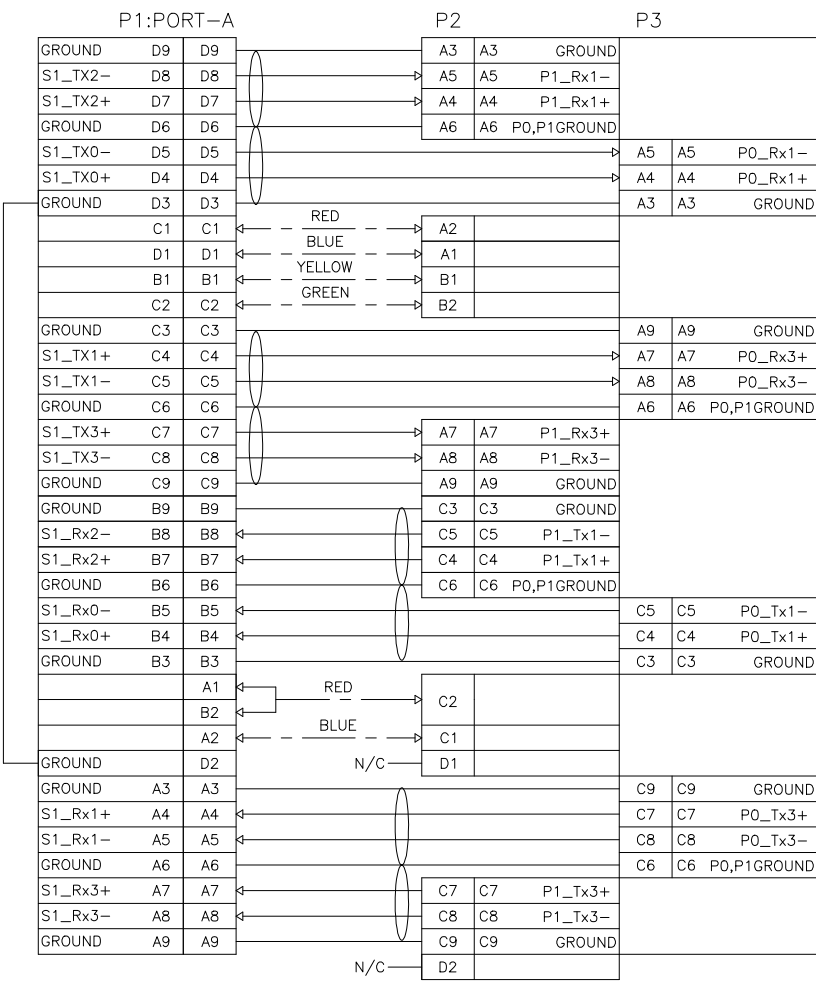

RoHS COMPLIANT

Unit : mm

GENERAL TOLERANCES: (UNLESS SPECIFIED)

0 = ±.30
0.0 = ±.20
0.00 = ±.10
0.000 = ±.05
0" = ±.1"
0.0" = ±.50"

PROJECTION

D.R. 09/21/2022

qiufa

CH.K 09/21/2022

RLG

APV.D 09/21/2022

Sung

TITLE

MINI SAS HD 8i to 2*MINI SAS HD 4i

CABLE ASS'Y L:1000mm

SCALE

N/A

SIZE

A4

PART NO.

P39TTSG11000-3

FILE NO.

/

H-xxxx

REV. 02

SH,T NO. 2 OF 2