


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2019.01.18	李全榮

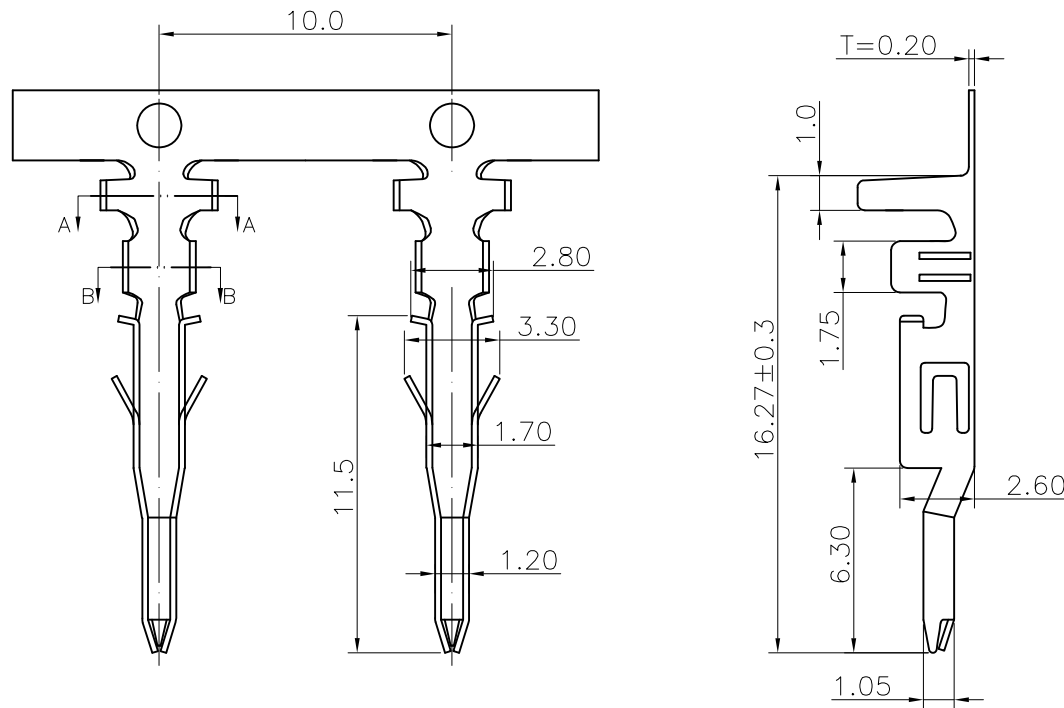

Specifications
Voltage Rating:600V AC/DC
Current Rating:9A AC/DC
Withstanding Voltage:1500V AC/minute
Temperature range:-25°C to +85°C
Insulation Resistance:1000MΩ Min.
Contact Resistance:10mΩ Max.
After environmental testig:20mΩ Max
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

GRR103 - 02 XX XX

Standard Plating Materials
01= Tin BH=Barss
AB=Phosphor Bronze

see table	AWG#18-22	3.0mm Max	Stamping Before Platirg:30u”Ni; 70u”Sn
Material	Wire Range	Insulation O.D	Finish

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±	X.±
.X*±	.X±0.30
.XX*±	.XX±0.20
.XXX*±	.XXX±0.10

DESIGNED: 李全榮
CHECKED:
APPROVED:

DATE: 2019.01.18
DATE:
DATE:

DWG. NO.
GRR103-T2
PART NO.
GRR103-02 XX XX

TITLE.
Pitch 4.20mm Crimp style
Connector

REV.	UNIT.	SCALE.	PAGE.	
A	mm	1:1	1/1	