


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/10/14'	HZW 10/10/14'	LJC 10/10/14'
B	DRAWING UPDATE	JLZ 03/11/20'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

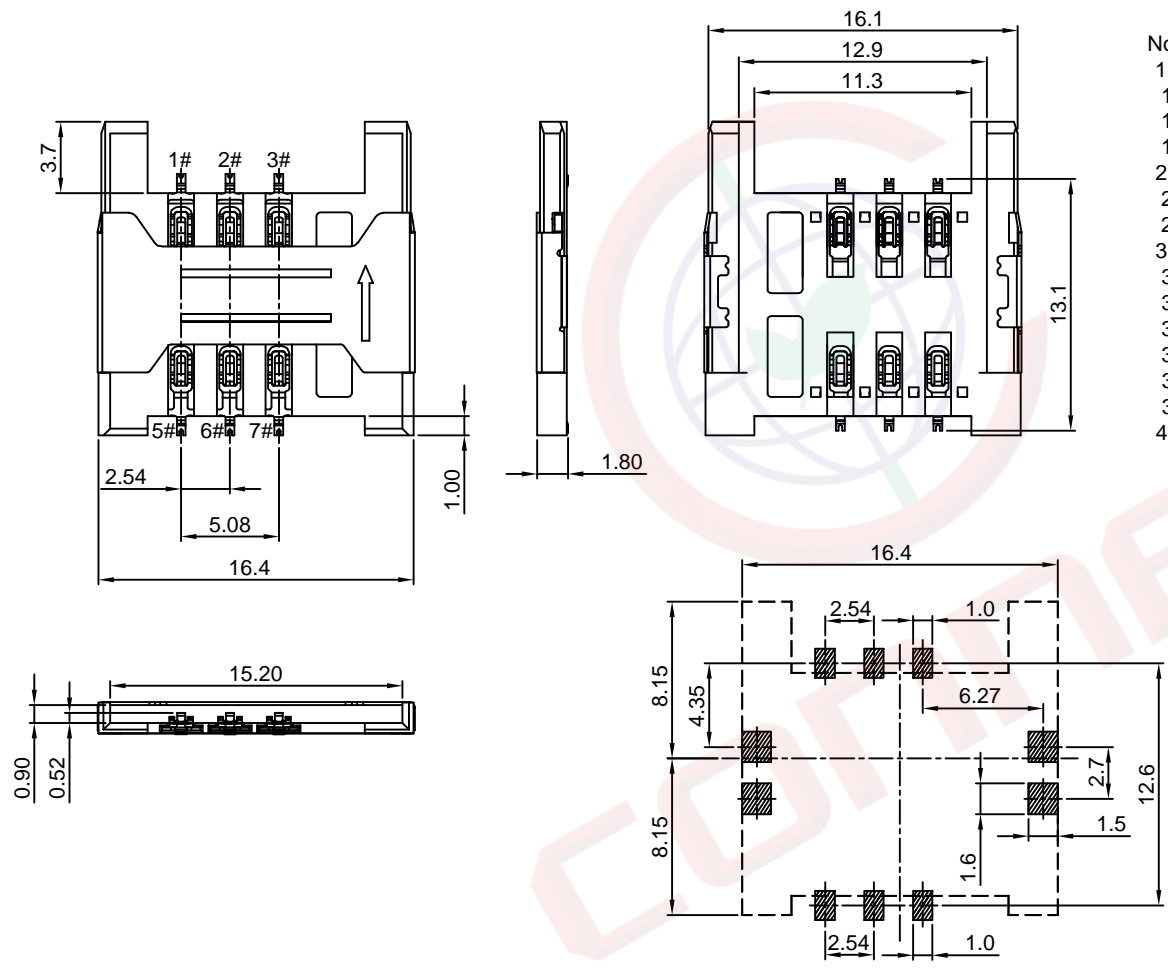

- Notes:
- Material:
    - Housing: High Temperature UL 94V-0 Color of Black.
    - Contacts: Copper Alloy,
    - Shell: Stainless Steel.
  - Finish:
    - Contact Area: Gold Over Nickel
    - Solder Area: Matte Tin.
  - Specifications:
    - Temperature Rated: -40°C TO +85°C
    - Voltage Rating: 12V AC/DC
    - Contact Resistance: 50mΩ Max.
    - Insulation Resistance: 1000mΩ Min.
    - Withstanding Voltage : 250V AC.
    - Current Rating: 1.0A.
  - Product Number Code:
 

DS1138-07 - XX X X X X X X

    - Packing Type: R: Tape On Reel
    - Shell Plating: S: Stainless
    - Housing Color: B: Black
    - Contact Plating: 0: Selective gold flash, 4: Selective 3u" gold
    - Mounting Type: S: SMT type
    - Connector Type: S: Socket
    - NO. Of Contacts: 06:6Pin

Pin definition					
1PIN	2PIN	3PIN	5PIN	6PIN	7PIN
VCC	RESET	CLK	GND	VPP	IO

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1138-07-XXXXXX-B		

PROJECTION		TITLE	2.54mm Mini SIM Card
UNITS	mm		H=1.8mm 6 Positions
SHEET SIZE	A4	SERIES	DS1138-07 SERIES

**晨翔电子有限公司**  
CONNFLY CONNELY ELECTRONIC CO. LTD