



Ver.	modify NO.	Details	Area	P.I.C	Date


Front View

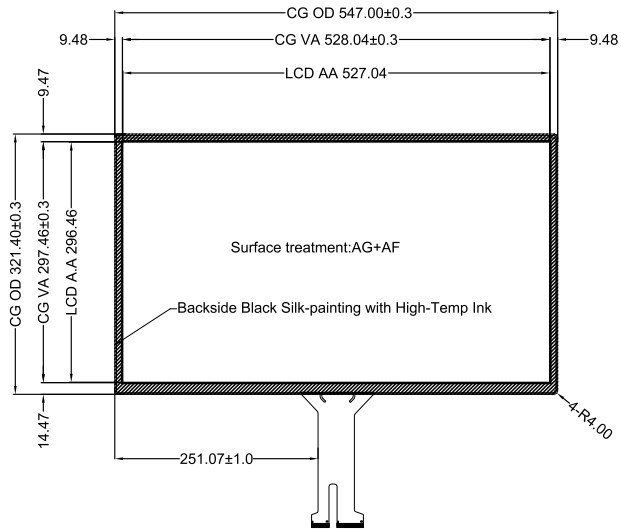

Side View

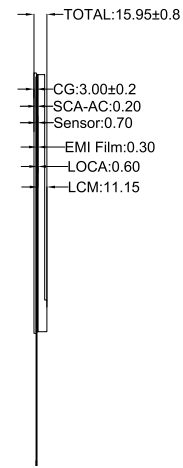


Back View

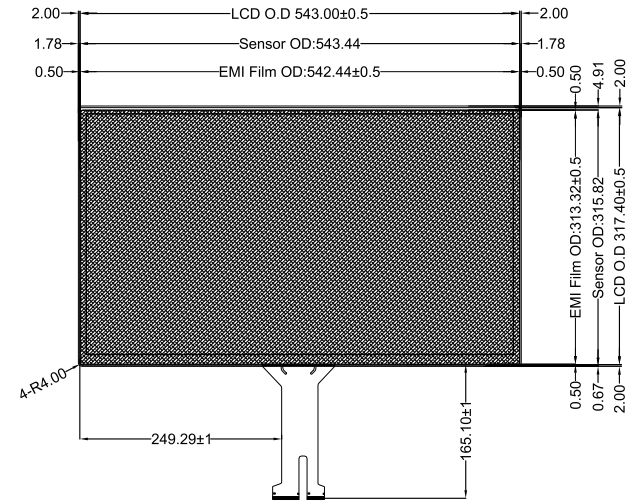

Technical Datasheet:

1. Structure: TP+LCM Optical Bonding
2. Cover Glass: 4mm Tempered Glass
3. LCD: G238HAN01.3
4. TP Controller: BTP-TPM-CTR-ILI-238B-SN03
5. TP Controller IC: ILI2510
6. Surface Hardness: ≥6H
7. Light Transmittance: ≥60%
8. Working Temperature: -20°C~+70°C, ≤85%RH;
9. Storage Temperature: -30°C~+80°C, ≤85%RH;
10. Unmarked Tolerance: ±0.5mm
11. All materials used conform to RoHS standards

SCALE: 2:1



Display Structure	
TOP	
— Cover Glass	3.0mm
— SCA-AC	0.2mm
— Sensor	0.7mm
— EMI Film	0.3mm
— LOCA	0.6mm
— LCM	11.15mm
BOTTOM	

Designed by:	Curry.Wang
Checked by:	Jimmy.Lu
Approved by:	Cale.Chen
Workmanship:	
Standardization:	Link.Chen
Released by:	Rocky.Liu

Part No.		BTP-TPM-G2-23.8-EMI-SN03		
Product Name:		Drawing No.	PM238241223SN03	
23.8 inch Touch Display		Project Code.	PM238SN03	
Business Unit:		Period Mark	View Angle	Ratio
SNT-BTP		A		1:2
BOM Code	2.03.238.01.0103	Page 1	Total 1 Page	
Product Series	BTP-TPM	恩诺泰科创电子(苏州)有限公司 SINOTELECTRONICS INC.		