

**BOE****PROPRIETARY NOTE**

THIS SPECIFICATION IS THE PROPERTY OF BOEFZ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOEFZ AND MUST BE RETURNED TO BOEFZ UPON ITS REQUEST

SPEC. NUMBER  
NO. S8-65-AA-047PRODUCT GROUP  
TFT-LCD

Rev. P2

ISSUE DATE  
2020.12.14PAGE  
1 OF 31**TITLE :****DV430FHB-N10 (Rev.2.1) Product Specification**

Hefei BOE Display Technology Co.,Ltd



**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
3 OF 31**Contents**

No	ITEM	Page
	REVISIONS HISTORY	2
	CONTENTS	3
1	GENERAL DESCRIPTION	4
	1.1 Introduction	
	1.2 Features	
	1.3 Applications	
	1.4 General Specification	
2	ABSOLUTE MAXIMUM RATINGS	6
3	ELECTRICAL SPECIFICATIONS	7
	3.1 TFT LCD Open Cell	
4	INTERFACE CONNECTION	8
	4.1 Open Cell Input Signal & Power	
	4.2 LVDS Interface	
	4.3 LVDS Rx Interface Timing Parameter	
	4.4 LVDS Rx Interface Eye Diagram	
	4.5 LVDS Receiver Differential Input	
5	SIGNAL TIMING SPECIFICATIONS	18
	5.1 Timing Parameters (DE only mode)	
	5.2 Signal Timing Waveform	
	5.3 Input Signals, Basic Display Colors and Gray Scale of Colors	
	5.4 Power Sequence	
6	OPTICAL SPECIFICATIONS	22
7	MECHANICAL CHARACTERISTICS	24
8	RELIABILITY TEST	25
9	PRODCUT SERIAL NUMBER	26
10	PACKING INFORMATION	27
11	HANDING & CAUTIONS	29
12	APPENDIX	30

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2


2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
4 OF 31

## 1.0 GENERAL DESCRIPTION

### 1.1 Introduction

DV430FHB-N10 is a color active matrix TFT LCD open cell using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This open cell has a 42.5 inch diagonally measured active area with FHD resolutions (1920 horizontal by 1080 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical stripe and this module can display 16.7M colors. The TFT-LCD panel is adapted for a low reflection and higher color type.

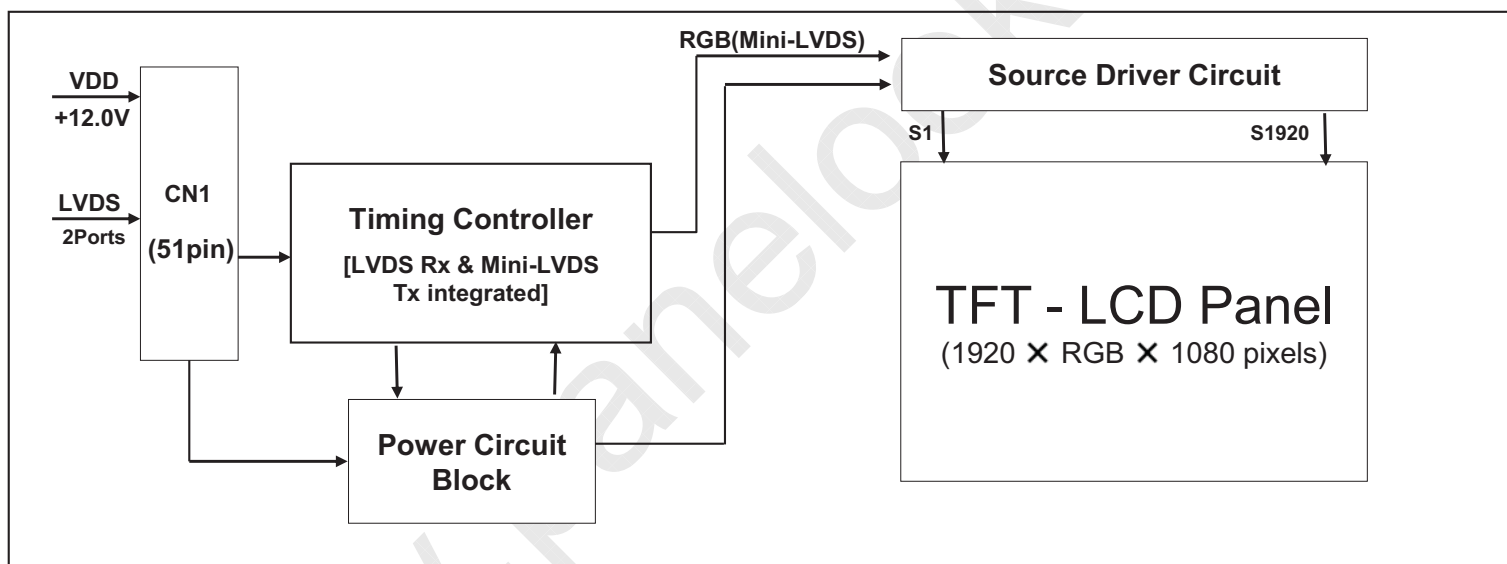

### 1.2 Features

- LVDS interface with 2 pixel / clock
- High-speed response
- Low color shift image quality
- 8-bit color depth, display 16.7M colors
- Wide viewing angle, gate driver use GOA mode
- DE (Data Enable) only mode
- ADS technology is applied for high display quality
- RoHS compliant

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
5 OF 31

### 1.3 Application

- Home Alone Multimedia TFT-LCD TV
- Display Terminals for Control System
- Full High Definition TV(FHD TV)
- AV application Products

### 1.4 General Specification

&lt; Table 1. General Specifications &gt;

Parameter	Specification	Unit	Remark
Active area	940.896(H) × 529.254(V)	mm	
Number of pixels	1920(H) × 1080(V)	pixels	
Pixel pitch	163.35(H) × 490.05(V)	um	
Pixel arrangement	Pixels RGB Vertical stripe		
Display colors	16.7M (8bits True)	colors	
Display mode	Transmission mode, Normally Black		
Open Cell Transmittance	6.30 (Typ.)	%	At center point with BOE BLU
Weight	1510 (Typ.)	gram	
Power Consumption	6.0	Watt	
Surface Treatment	Haze 1% , 3H , Anti-Glare Layer(for Front) , Clear(for Rear)		
Possible display type	Landscape and Portrait Enabled		

**BOE**

**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047

SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product Specification

PAGE  
6 OF 31


## 2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Open Cell Electrical Specifications > [VSS=GND=0V]

Parameter	Symbol	Min.	Max.	Unit	Remark
Power Supply Voltage	VDD	VSS-0.3	13.5	V	Ta = 25 °C
Operating Temperature	T <sub>OP</sub>	0	+50	°C	Note 1
Storage Temperature	T <sub>SUR</sub>	-20	+60	°C	
	T <sub>ST</sub>	-20	+60	°C	
Operating Ambient Humidity	Hop	10	80	%RH	
Storage Humidity	Hst	10	80	%RH	

Note 1 : Temperature and relative humidity range are shown in the figure below.  
Wet bulb temperature should be 39 °C max. and no condensation of water.

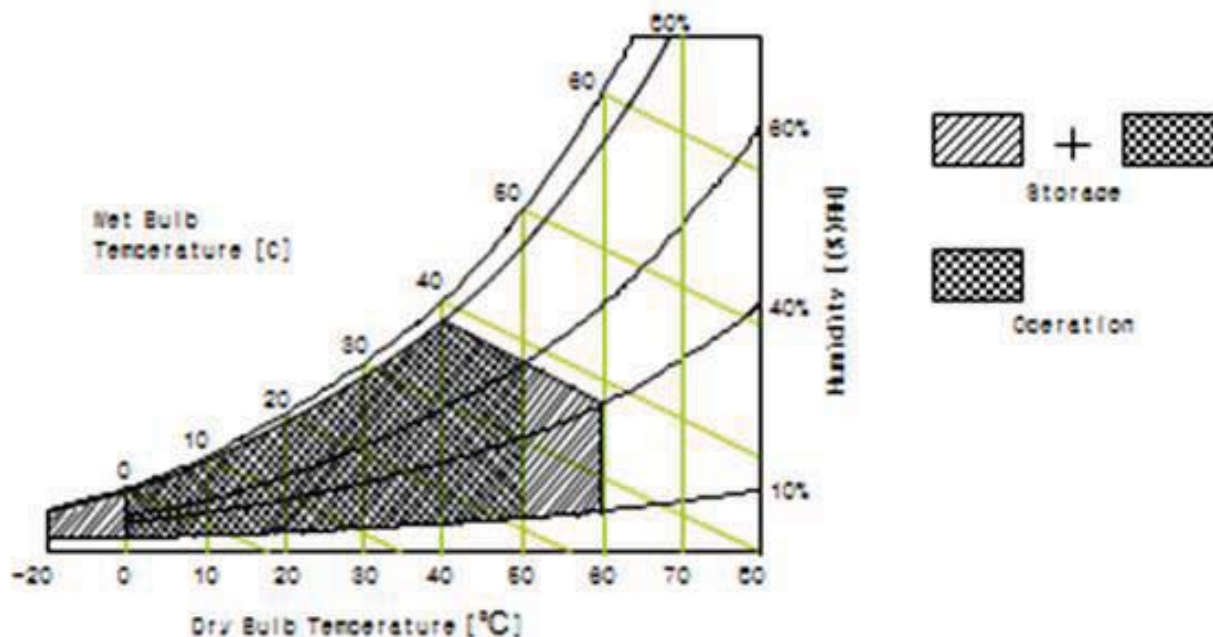

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
7 OF 31

### 3.0 ELECTRICAL SPECIFICATIONS

#### 3.1 TFT LCD Open Cell

&lt; Table 3. Open Cell Electrical Specifications &gt;

[Ta =25±2 °C]

Parameter	Symbol	Values			Unit	Remark	
		Min	Typ	Max			
Power Supply Input Voltage	VDD	10.8	12	13.2	Vdc		
Power Supply Ripple Voltage	VRP			300	mV		
Power Supply Current	IDD	-	500	950	mA	Note 1	
Power Consumption	PDD	-	6.0	11.4	Watt		
Rush current	IRUSH	-	-	3.0	A	Note 2	
LVDS Interface	Differential Input High Threshold Voltage	VLVTH	+100		+300	mV	
	Differential Input Low Threshold Voltage	VLVTL	-300		-100	mV	
	Common Input Voltage	VLVC	1.0	1.2	1.4	V	
CMOS Interface	Input High Threshold Voltage	VIH	2.7	-	3.3	V	
	Input Low Threshold Voltage	VIL	0	-	0.6	V	

Note 1 : The supply voltage is measured and specified at the interface connector of LCM.

The current draw and power consumption specified is for VDD=12.0V,



Frame rate  $f_v=60\text{Hz}$  and Clock frequency = 74.25MHz.

Test Pattern of power supply current

a) Typ : Mosaic 7X5 (L0/L255)

b) Max : Horizontal 1 Line (L0/L255)

c) Flicker Pattern

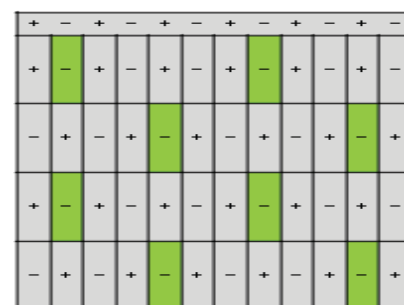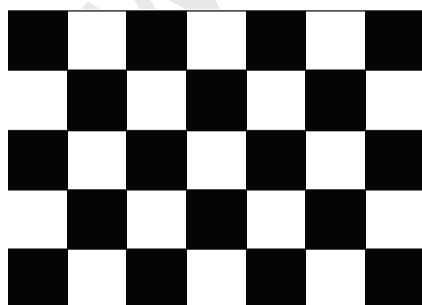

Note 2 : The duration of rush current is about 2ms and rising time of Power Input is 1ms(min)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
8 OF 31**4.0 INTERFACE CONNECTION****4.1 Open Cell Input Signal & Power**

&lt; Table 4. Open Cell Input Connector Pin Configuration &gt;

Pin No	Symbol	Description	Pin No	Symbol	Description
1	NC	No Connection	21	GND	Ground
2	SDA	I <sup>2</sup> C Data	22	CH1[3]-	First pixel negative LVDS differential data input. Pair3
3	SCL	I <sup>2</sup> C Clock	23	CH1[3]+	First pixel positive LVDS differential data input. Pair3
4	NC	Not Connected	24	NC	Not Connected
5	NC	Not Connected	25	NC	Not Connected
6	NC	Not Connected	26	NC	Not Connected
7	SELLVDS	High: JEIDA Low or Open: VESA	27	NC	Not Connected
8	NC	Not Connected	28	CH2[0]-	Second pixel negative LVDS differential data input. Pair0
9	NC	Not Connected	29	CH2[0]+	Second pixel positive LVDS differential data input. Pair0
10	NC	Not Connected	30	CH2[1]-	Second pixel negative LVDS differential data input. Pair1
11	GND	Ground	31	CH2[1]+	Second pixel positive LVDS differential data input. Pair1
12	CH1[0]-	First pixel negative LVDS differential data input. Pair0	32	CH2[2]-	Second pixel negative LVDS differential data input. Pair2
13	CH1[0]+	First pixel positive LVDS differential data input. Pair0	33	CH2[2]+	Second pixel positive LVDS differential data input. Pair2
14	CH1[1]-	First pixel negative LVDS differential data input. Pair1	34	GND	Ground
15	CH1[1]+	First pixel positive LVDS differential data input. Pair1	35	CH2CLK-	Second pixel negative LVDS clock
16	CH1[2]-	First pixel negative LVDS differential data input. Pair2	36	CH2CLK+	Second pixel positive LVDS clock
17	CH1[2]+	First pixel positive LVDS differential data input. Pair2	37	GND	Ground
18	GND	Ground	38	CH2[3]-	Second pixel negative LVDS differential data input. Pair3
19	CH1CLK-	First pixel negative LVDS clock	39	CH2[3]+	Second pixel positive LVDS differential data input. Pair3
20	CH1CLK+	First pixel positive LVDS clock	40	NC	Not Connected

R2013-9024-O(3/3)

A4(210 X 297)

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
9 OF 31

Pin No	Symbol	Description	Pin No	Symbol	Description
41	NC	Not Connected	47	NC	Not Connected
42	NC	Not Connected	48	VCC	Input Voltage +12V
43	NC	Not Connected	49	VCC	Input Voltage +12V
44	GND	Ground	50	VCC	Input Voltage +12V
45	GND	Ground	51	VCC	Input Voltage +12V
46	GND	Ground			


Notes : 1. NC(Not Connected) : This pins are only used for BOE internal operations.

2. Input Level of LVDS signal is based on the EIA-644 Standard.

3. LVDS\_SEL : This pin is used for selecting LVDS signal data format.

If this Pin : High (3.3V) → JEIDA LVDS format


Otherwise : Low (GND) or Open (NC) → Normal NS LVDS format

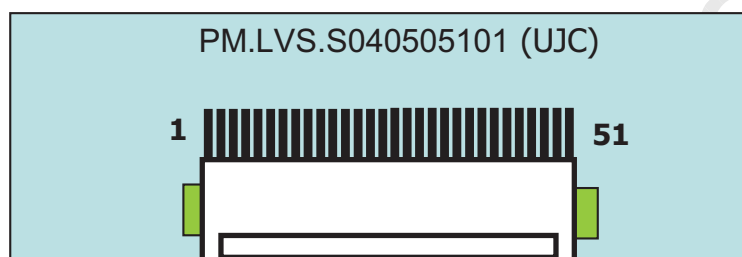
**Rear view of LCM****BIST Pattern**

PT1:Black (2sec)	PT2:White ( 2sec)	PT3:Red (2sec)	PT4:Green (2sec)	PT5:Blue (2sec)



<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification	PAGE 10 OF 31	

-51 pin LVDS Connector ——0.5Ph H3.75 LVDS(Deren)

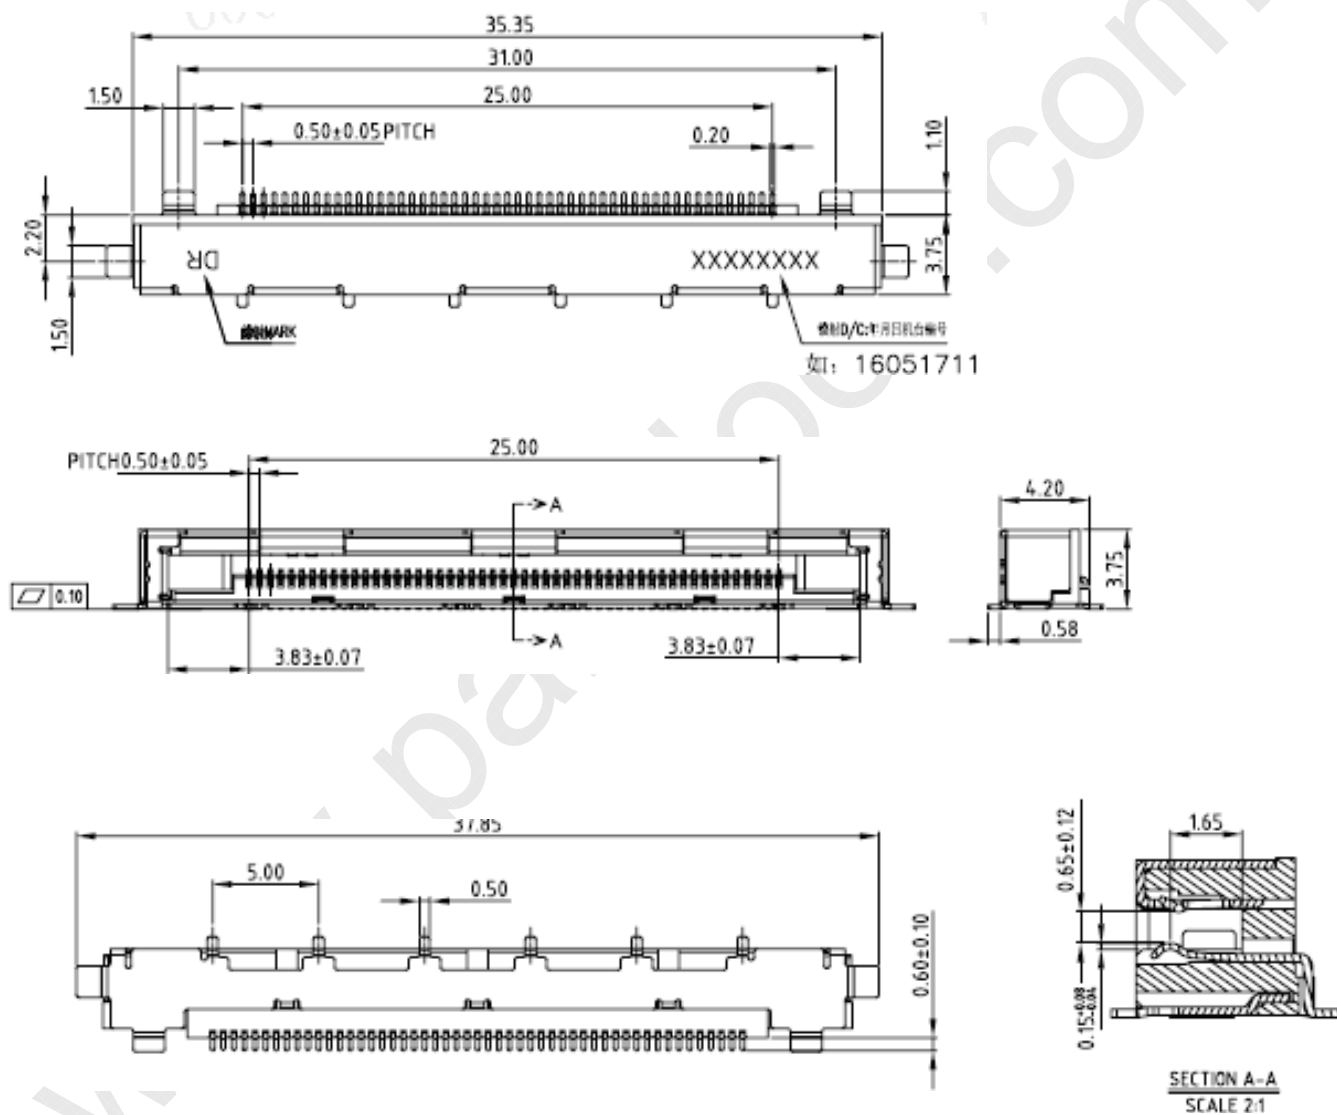




	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification		PAGE 11 OF 31

-51 pin LVDS Connector —PM.FPC.SAFC666801(UJC)

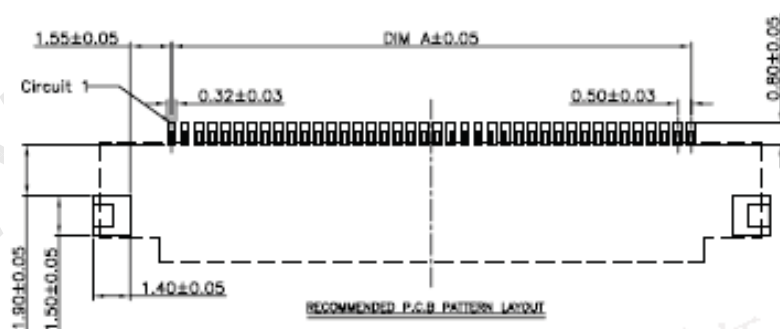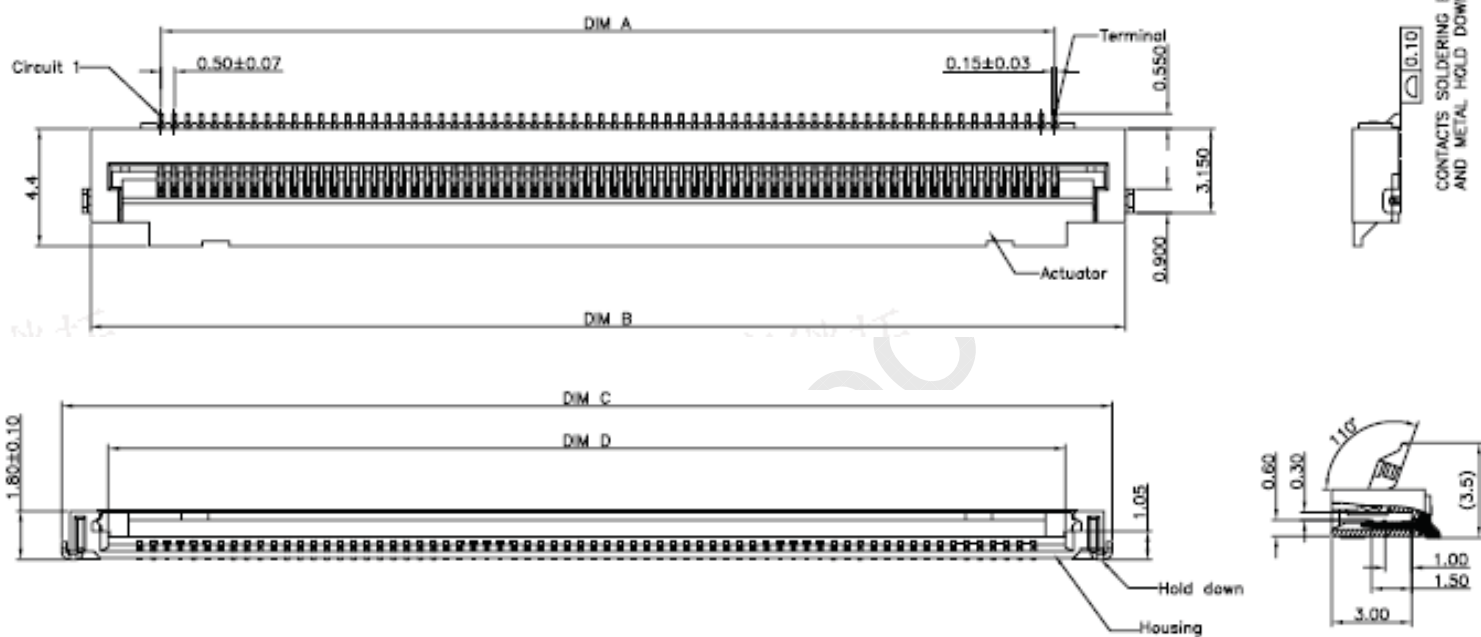

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification		PAGE 12 OF 31

-51 pin LVDS Connector — IS050-C51B-C39-S(UJU)

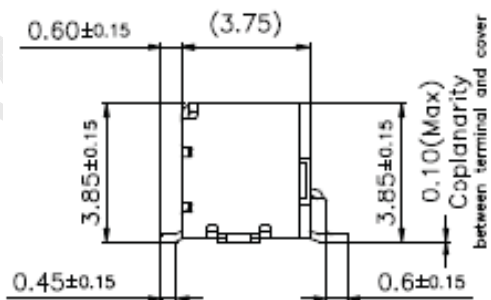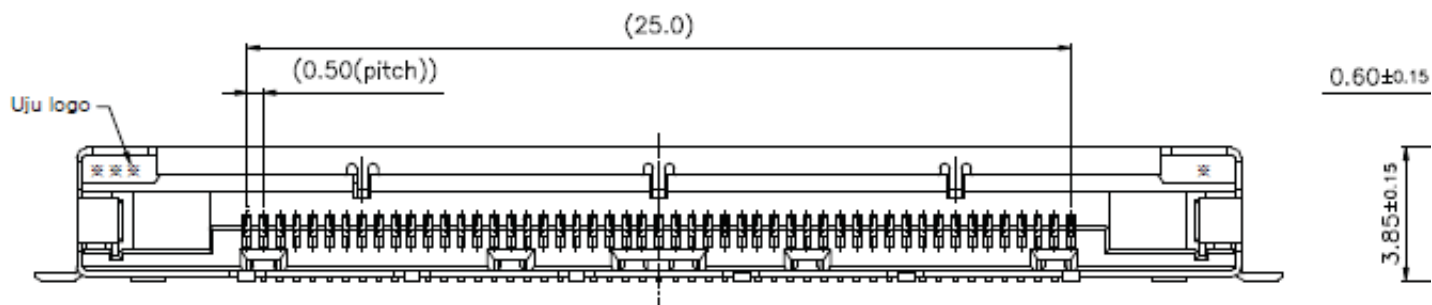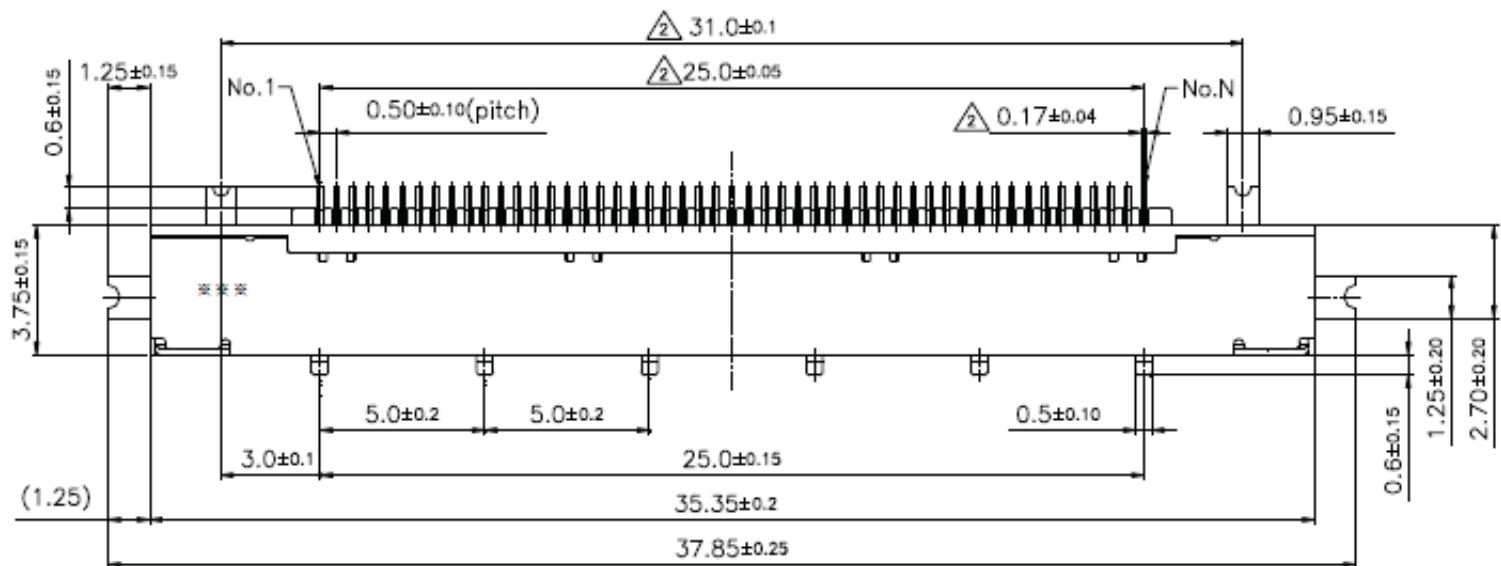

# BOE

## PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P2



2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047


SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product Specification

PAGE  
13 OF 31



- 68 pin FFC Connector :FC0568-L3920W420H180-N02(Deren)

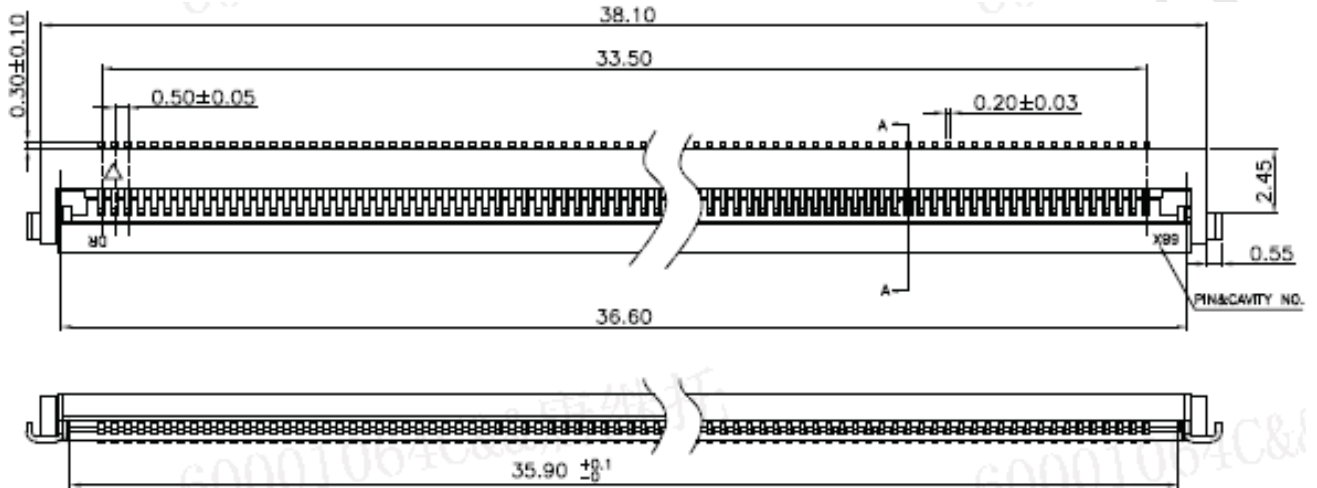


RECOMMENDED FPC/FFC DIM.  
THICKNESS:0.3±0.03



RECOMMENDED FFC DIM.  
THICKNESS:0.3±0.03

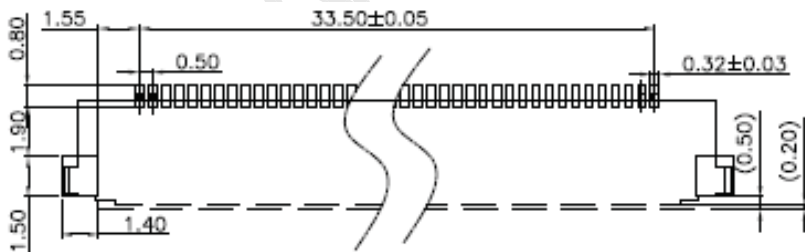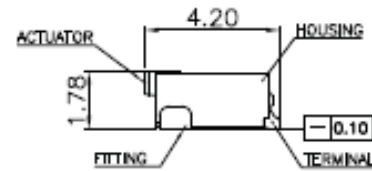

P.C.B LAYOUT REF

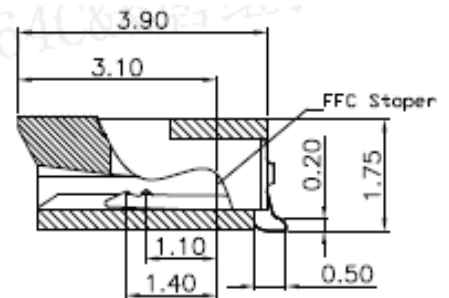

SECTION A-A  
SCALE 2:1

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
14 OF 31

## 4.2 LVDS Interface

- LVDS Receiver : Timing Controller (LVDS Rx merged) / LVDS Data : Pixel Data

&lt; Table 5. Open Cell Input Connector Pin Configuration &gt;

Channel No.	Data No.	8-bit LVDS Type	
		NS	JEIDA
0	Bit-0	R0	R2
	Bit-1	R1	R3
	Bit-2	R2	R4
	Bit-3	R3	R5
	Bit-4	R4	R6
	Bit-5	R5	R7
	Bit-6	G0	G2
1	Bit-0	G1	G3
	Bit-1	G2	G4
	Bit-2	G3	G5
	Bit-3	G4	G6
	Bit-4	G5	G7
	Bit-5	B0	B2
	Bit-6	B1	B3
2	Bit-0	B2	B4
	Bit-1	B3	B5
	Bit-2	B4	B6
	Bit-3	B5	B7
	Bit-4	HS	HS
	Bit-5	VS	VS
	Bit-6	DE	DE
3	Bit-0	R6	R0
	Bit-1	R7	R1
	Bit-2	G6	G0
	Bit-3	G7	G1
	Bit-4	B6	B0
	Bit-5	B7	B1
	Bit-6	-	

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14


SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
15 OF 31

### 4.3 LVDS Rx Interface Timing Parameter

The specification of the LVDS Rx interface timing parameter is shown in Table 6.

&lt;Table 6. LVDS Rx Interface Timing Specification&gt;

Item	Symbol	Min	Typ	Max	Unit	Remark
CLKIN Period	tRCIP	10.31	13.47(10.78)	15.87	nsec	
Input Data 0	tRIP1	-0.42	0.0	+0.42	nsec	
Input Data 1	tRIP0	tRCIP/7-0.42	tRCIP/7	tRCIP/7+0.42	nsec	
Input Data 2	tRIP6	2 × tRCIP/7-0.42	2 × tRCIP/7	2 × tRCIP/7+0.42	nsec	
Input Data 3	tRIP5	3 × tRCIP/7-0.42	3 × tRCIP/7	3 × tRCIP/7+0.42	nsec	
Input Data 4	tRIP4	4 × tRCIP/7-0.42	4 × tRCIP/7	4 × tRCIP/7+0.42	nsec	
Input Data 5	tRIP3	5 × tRCIP/7-0.42	5 × tRCIP/7	5 × tRCIP/7+0.42	nsec	
Input Data 6	tRIP2	6 × tRCIP/7-0.42	6 × tRCIP/7	6 × tRCIP/7+0.42	nsec	

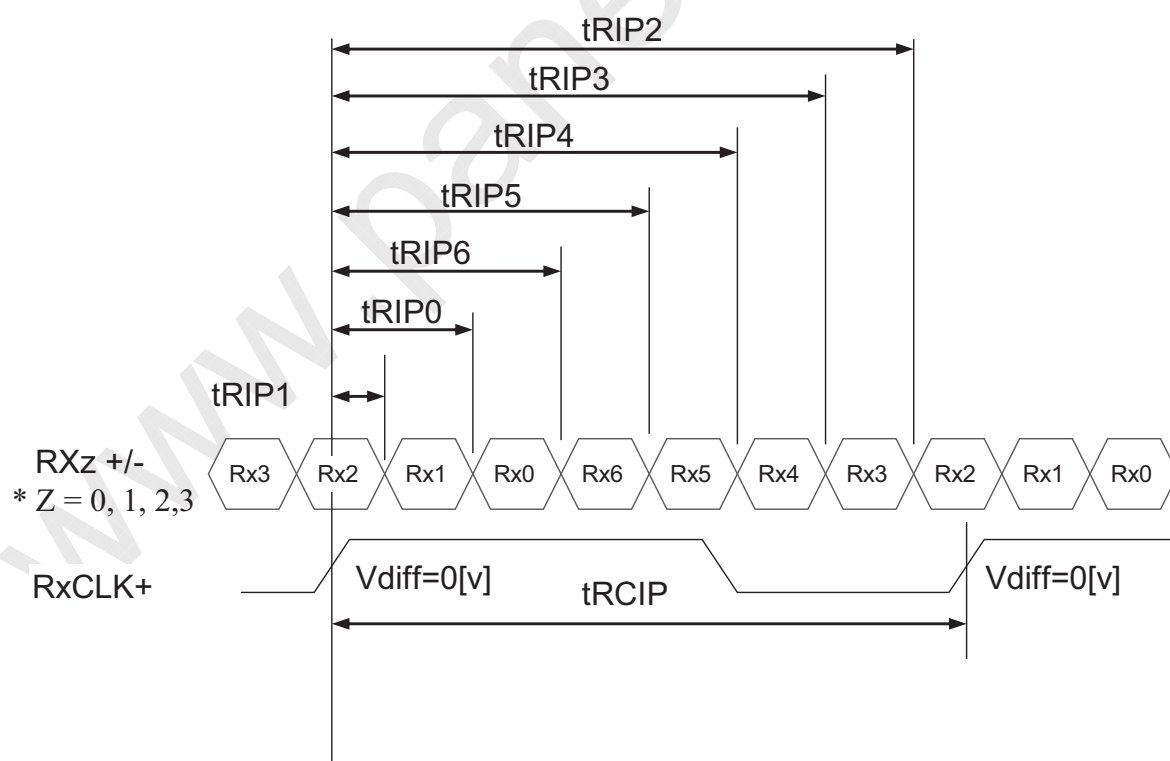

$$* V_{diff} = (RXz+) - (RXz-), \dots, (RXCLK+) - (RXCLK-)$$

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2


2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
16 OF 31

#### 4.4 LVDS Rx Interface Eye Diagram

&lt; Table 7. LVDS Rx Interface Eye Diagram &gt;

Symbol	Min	Typ	Max	Unit	Note
A	-	100	-	mV	
B	-	100	-	mV	
C	-	0	-	mV	
D	-	-100	-	mV	
E	-	-100	-	mV	
F	-	0	-	mV	

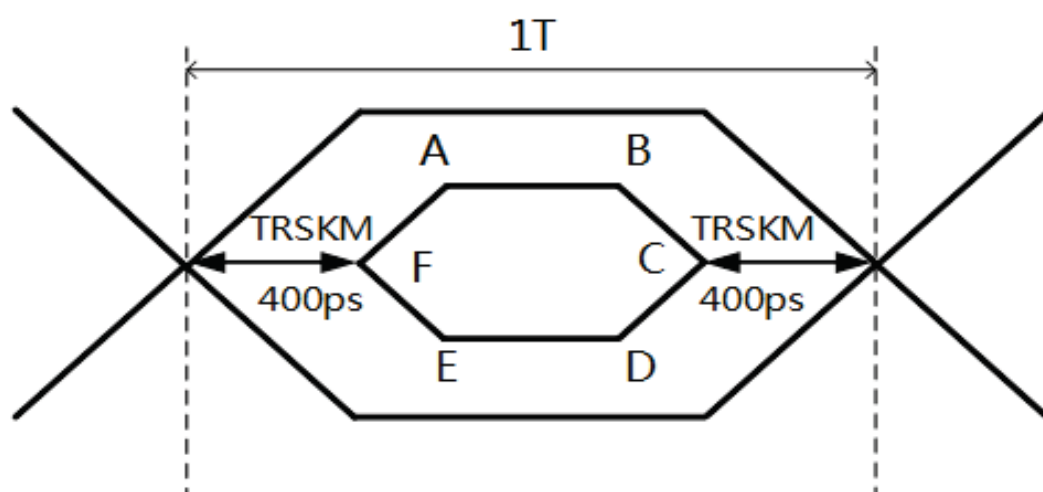

- Notes: 1. Time F to A,B to C,C to D,E to F is 150p second.  
 2. LVDS clock=85Mhz.  
 3. The time A to B= $1T-2*TRSKM-2*150ps$ .

**BOE**

PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14


SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
17 OF 31

## 4.5 LVDS Receiver Differential Input

&lt; Table 7-1. LVDS Receiver Differential Input &gt;

Symbol	Parameter	Min	Typ	Max	Unit	Condition
$R_{xVTH}$	Differential input high threshold voltage			+0.1V	V	$R_{xVCM} = 1.2V$
$R_{xVTL}$	Differential input low threshold voltage	-0.1V			V	
$R_{xVIN}$	Input voltage range (singled-end)	0		2.4	V	
$R_{xVCM}$	Differential input common mode voltage	$ V_{ID} /2$		$2.4 -  V_{ID} /2$	V	
$ V_{ID} $	Differential input voltage	0.1		0.6	V	

## Single-end Signals

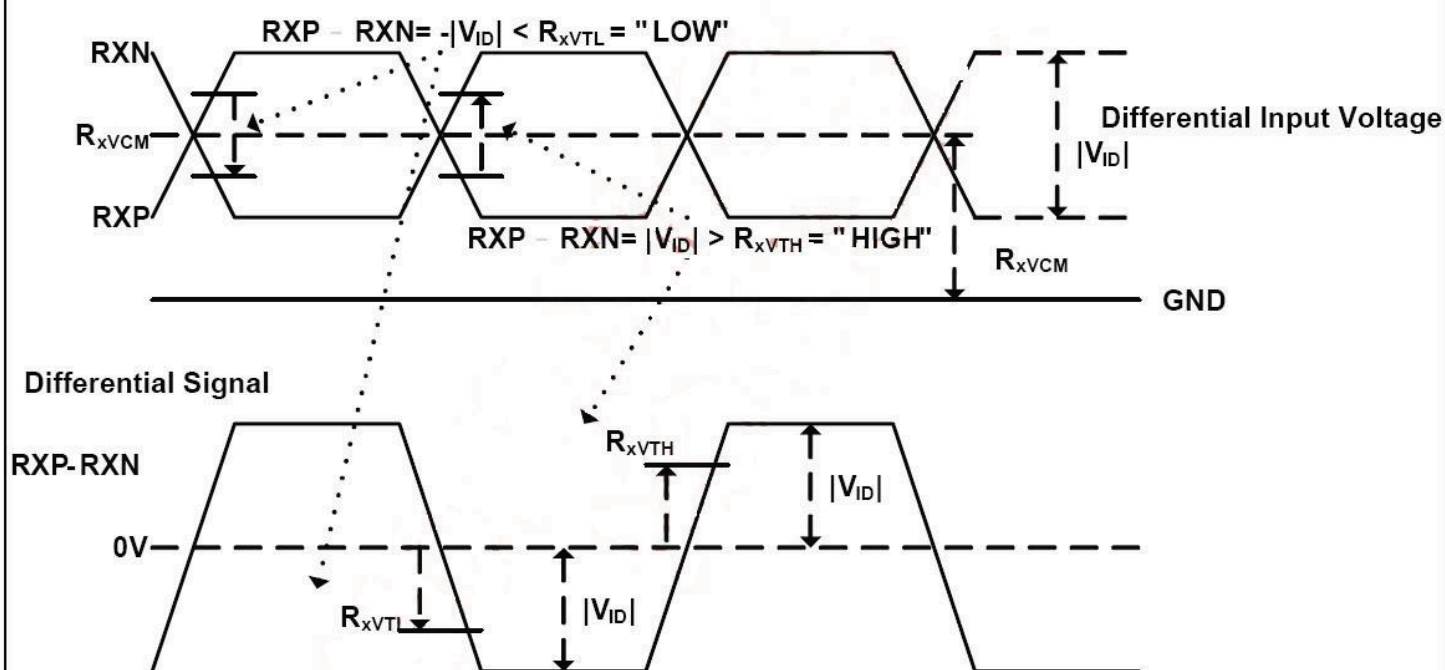

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
18 OF 31**5.0 SIGNAL TIMING SPECIFICATION****5.1 Timing Parameters (DE only mode)**

&lt; Table 8. Timing Table &gt;

Item		Symbols	Min	Typ	Max	Unit	
Clock	Frequency	1/Tc	60	74.25	78	MHz	
	High Time	Tch	-	4/7Tc	-		
	Low Time	Tcl	-	4/7Tc	-		
Frame Period		Tv	1100	1125	1149	lines	
			48.5	60	63	Hz	
Horizontal Active Display Term		Valid	t <sub>HV</sub>	-	960	-	t <sub>CLK</sub>
		Total	t <sub>HP</sub>	1060	1100	1200	t <sub>CLK</sub>
Vertical Active Display Term		Valid	t <sub>VV</sub>	-	1080	-	t <sub>HP</sub>
		Total	t <sub>VP</sub>	1100	1125	1149	t <sub>HP</sub>

Notes: This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

&lt; Table 9. LVDS Input SSCG &gt;

Symbol	Parameter	Condition	Min	Typ	Max	Unit
F	LVDS Input frequency	-	45	74.25	85	MHz
T <sub>LVSK</sub>	LVDS channel to channel skew	F=100MHz V <sub>IC</sub> =1.2V V <sub>ID</sub> =±400mV	-380	-	+380	ps
F <sub>LVMOD</sub>	Modulating frequency of input clock during SSC		-	-	85	KHz
F <sub>LVDEV</sub>	Maximum deviation of input clock frequency during SSC		-3	-	+3	%
T <sub>CCJ</sub>	Cycle to Cycle jitter		-	-	100	ps

**BOE****PRODUCT GROUP**

REV

ISSUE DATE



TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
19 OF 31

## 5.2 Signal Timing Waveform

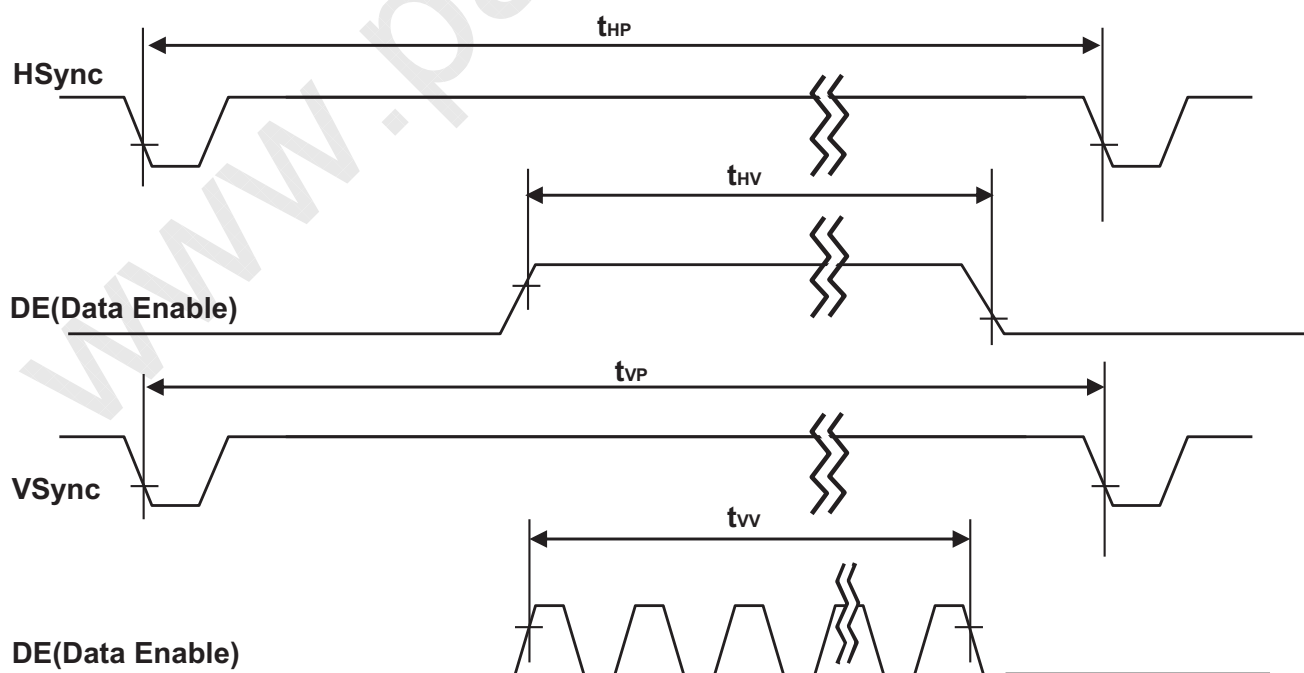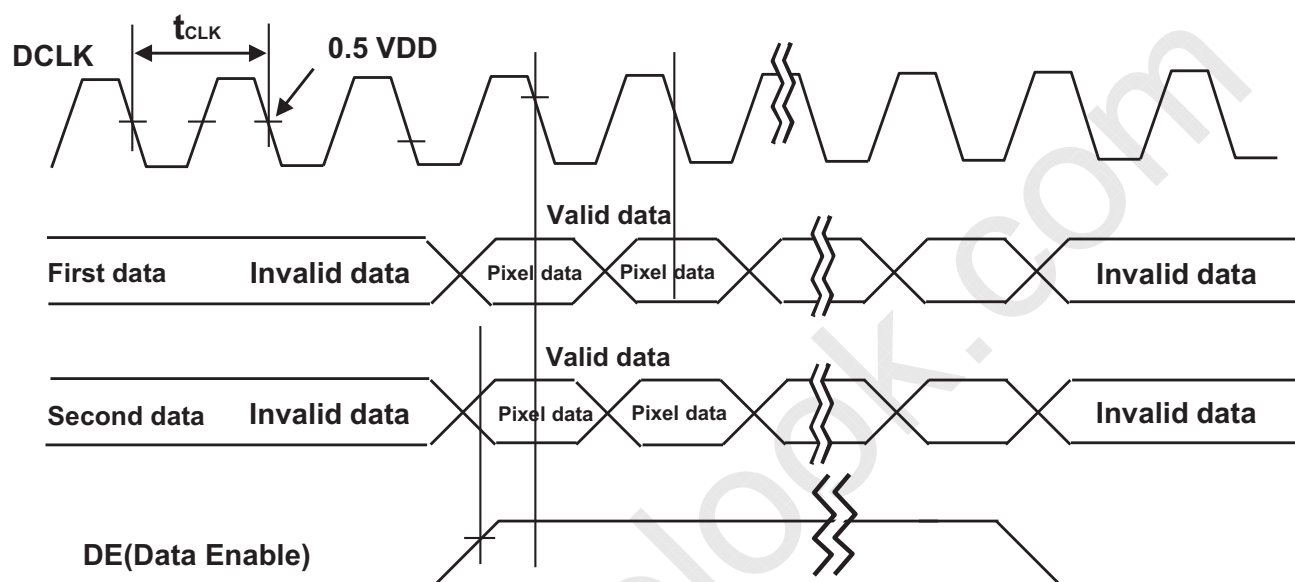

**BOE**

**PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047

SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product Specification

PAGE  
20 OF 31

5.3 Input Signals, Basic Display Colors and Gray Scale of Colors

< Table 10. Input Signal and Display Color Table >

Color & Gray Scale		Input Data Signal																							
		Red Data								Green Data								Blue Data							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of Red	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△																								
	▽																								
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	▽	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of Green	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	
	△																								
	▽																								
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of Blue	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	
	△																								
	▽																								
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Gray Scale of White	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
	△	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	
	△																								
	▽																								
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT


P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
21 OF 31

## 5.4 Power Sequence

To prevent a latch-up or DC operation of the Open Cell, the power on/off sequence shall be as shown in below

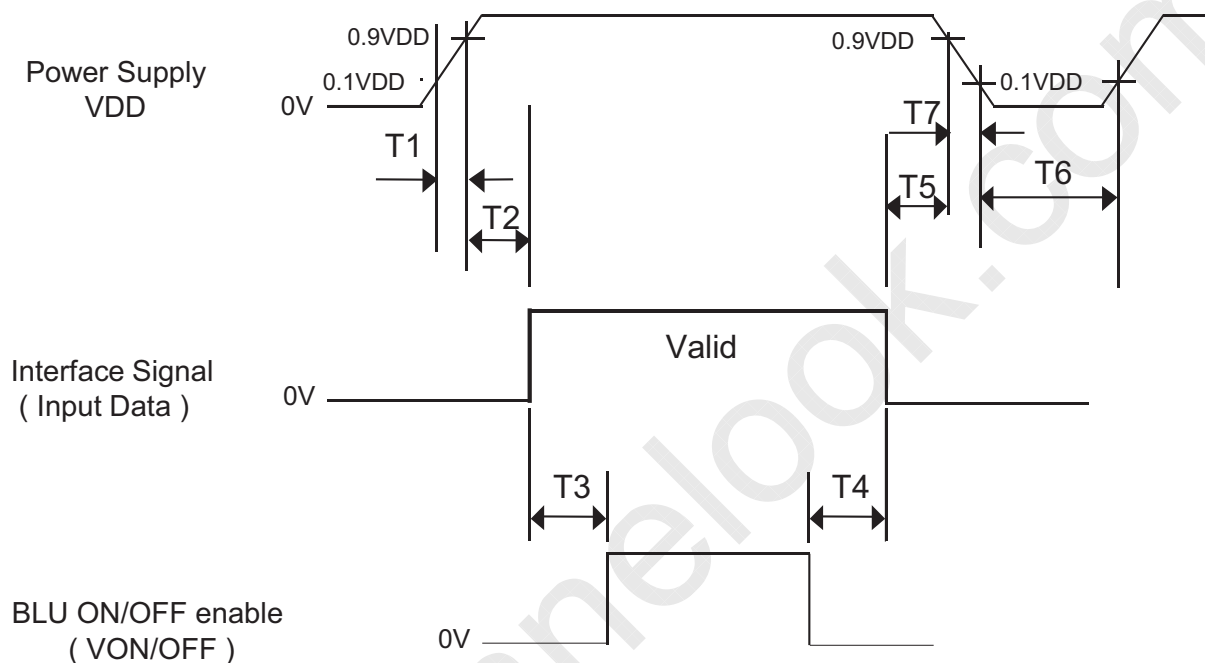

&lt; Table 11. Sequence Table &gt;

Parameter	Values			Units
	Min	Typ	Max	
T1	0.5	-	20	ms
T2	10	-	100	ms
T3	200	-	-	ms
T4	200	-	-	ms
T5	0	-	-	ms
T6	1	-	-	s

- Notes:
1. Back Light must be turn on after power for logic and interface signal are valid.
  2. Even though T1 is out of SPEC, it is still ok if the inrush current of VDD is below the limit.
  3. When  $VDD < 0.9VDD(Typ.)$ , Power off.
  4. T7 decreases smoothly, if there were rebounding voltage, it must smaller than 5 volts.

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
22 OF 31

## 6.0 OPTICAL SPECIFICATIONS

The test of optical specifications shall be measured in a dark room (ambient luminance $\leq$ 1 lux and temperature $=25\pm 2^{\circ}\text{C}$ ) with the equipment of Luminance meter system (Goniometer system and PR730) and test unit shall be located at an approximate distance 180cm from the LCD surface at a viewing angle of  $\theta$  and  $\Phi$  equal to  $0^{\circ}$ . We refer to  $\theta_{\Phi=0}$  ( $=\theta_3$ ) as the 3 o'clock direction (the "right"),  $\theta_{\Phi=90}$  ( $=\theta_{12}$ ) as the 12 o'clock direction ("upward"),  $\theta_{\Phi=180}$  ( $=\theta_9$ ) as the 9 o'clock direction ("left") and  $\theta_{\Phi=270}$  ( $=\theta_6$ ) as the 6 o'clock direction ("bottom"). While scanning  $\theta$  and/or  $\Phi$ , the center of the measuring spot on the Display surface shall stay fixed. The measurement shall be executed after 30 minutes warm-up period. VDD shall be 12.0V at  $25^{\circ}\text{C}$ . Optimum viewing angle direction is 6 'clock.

&lt; Table 12. Optical Table &gt;

[VDD = 12.0V, Frame rate = 60Hz, Ta =  $25\pm 2^{\circ}\text{C}$ ]

Parameter		Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	$\Theta_3$	CR > 10		89		Deg.	Note 1
		$\Theta_9$			89		Deg.	
	Vertical	$\Theta_{12}$			89		Deg.	
		$\Theta_6$			89		Deg.	
Contrast ratio		CR		800:1	1200:1	-		Note 2
Reproduction of color	White	$W_x$	$\Theta = 0^{\circ}$ (Center) Normal Viewing Angle	TYP. - 0.03	0.277	TYP. + 0.03		Note 3
		$W_y$			0.274			
	Red	$R_x$			0.645			
		$R_y$			0.334			
	Green	$G_x$			0.305			
		$G_y$			0.608			
	Blue	$B_x$			0.153			
		$B_y$			0.050			
Response Time	G to G	$T_g$		-	8	10	ms	Note 4
Gamma Scale				2.0	2.2	2.4		
Cell Transmittance				5.9	6.3		%	Note 5

# BOE

## PRODUCT GROUP

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047

SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product Specification

PAGE  
23 OF 31

Note :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface.
2. Contrast measurements shall be made at viewing angle of  $\theta = 0^\circ$  and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state. (See Figure 1 shown in Appendix) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. The color chromaticity coordinates specified in Table 9 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel. The BLU is used by BOE.
4. Response time Tg is the average time required for display transition by switching the input signal as below table and is based on Frame rate fV =60Hz to optimize. Each time in below table is defined as Figure 2 and shall be measured by switching the

Measured Response Time	Target																
	0	15	31	47	63	79	95	111	127	143	159	175	191	207	223	239	255
0																	
15																	
31																	
47																	
63																	
79																	
95																	
111																	
127																	
143																	
159																	
175																	
191																	
207																	
223																	
239																	
255																	

5. Definition of Transmittance (T%) :

Module is with white(L255) signal input

$$\text{Transmittance} = \frac{\text{Luminance of LCD Module}}{\text{Luminance of BLU}} \times 100 \%$$

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
24 OF 31**7.0 MECHANICAL CHARACTERISTICS****7.1 Dimensional Requirements**

Figure 3(located in Appendix) shows mechanical outlines for the model DV430FHB-N10. Other parameters are shown in Table 13.

< Table 13. Dimensional Parameters >

Parameter	Specification	Unit
Active area	940.896 (H) × 529.254(V)	mm
Pixel pitch	163.35 (H) × 490.05(V)	um
Number of pixels	1920(H) × 1080(V) (1 pixel = R + G + B dots)	pixels
Weight	1510(Typ.)	g

**7.2 Surface Treatment and Polarizer Hardness**

The surface of the LCD has an Low haze coating to Reduce scratching. Front Polarizer hardness is at least 3H.

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2

2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
25 OF 31

## 8.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.


< Table 14. Reliability Test Parameters >

No	Test Items	Conditions
1	High temperature storage test	Ta = 60 °C, 240 hrs
2	Low temperature storage test	Ta = -20 °C, 240 hrs
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240hrs
4	High temperature operation test	Ta = 50 °C, 240hrs
5	Low temperature operation test	Ta = -5 °C, 240hrs
6	Thermal shock	Ta = -20 °C ↔ 60 °C (0.5 hr), 100 cycle

This test condition is based on BOE module.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification		PAGE 26 OF 31

### 9.0 PRODCUT SERIAL NUMBER

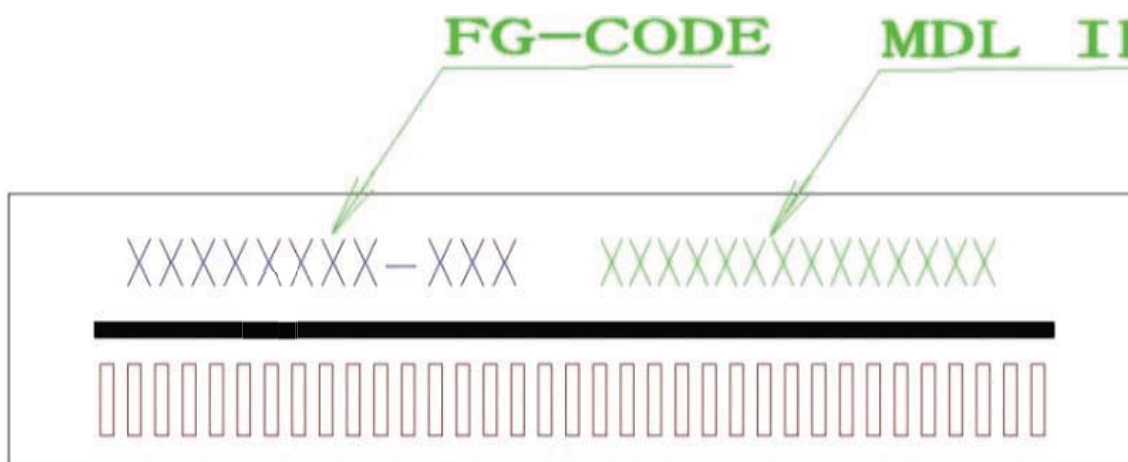

MDL ID Naming Rule:

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Code	S	L	S	9	2	0	3	5	9	4	2	0	A	A	0	0	0
Description	Model Code /GBN		Grade	Line	Year		Month	Model Extension Code (Last 4 Digits Of FG-CODE)				Serial No 00001-ZZZZZZ					

**BOE****PRODUCT GROUP**

REV

ISSUE DATE

TFT- LCD PRODUCT

P2


2020.12.14

SPEC. NUMBER  
NO.S8-65-AA-047SPEC. TITLE  
DV430FHB-N10(Rev.2.1) Product SpecificationPAGE  
27 OF 31

## 10.0 PACKING INFORMATION

BOE provides the standard shipping container for customers, unless customer specifies their packing information. The standard packing method and Barcode information are shown in below.

### 10.1 Packing Order

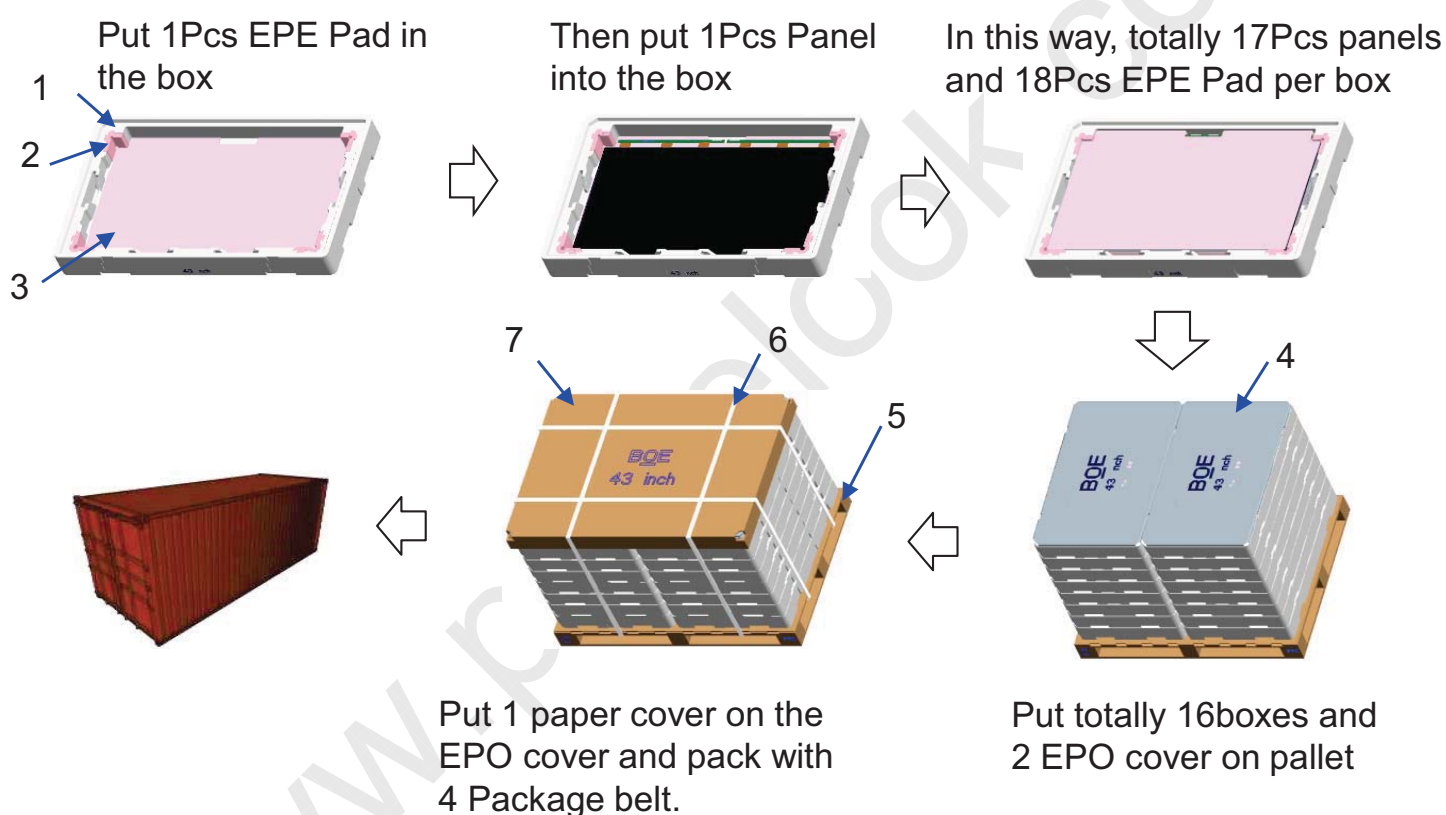

**Cautions:** When transferring in warehouse or factory, the arm length of electric forklift or hand pallet truck must be longer than the pallet.

No.	Description	Material
1	Bottom	EPO
2	Cushion	EPP
3	Pad	EPE
4	Cover	EPO
5	Pallet	Wood+ Paper+ PE
6	Band	PP
7	Cover	Paper

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification		PAGE 28 OF 31

### 10.2 Packing Note

- Box Dimension : 1100(±3)mmL×705(±2)mmW×127(±1.5)mmH
- Package Quantity in one Box : 17pcs

### 10.3 Box Label


- Label Size : 70 mm (L) × 30 mm (W)
- Contents

Model : DV430FHB-N10 ( FG Code of Product )

Q`ty : 17 Open Cell in one box.

Serial No. : Box Serial No.

Date : Packing Date

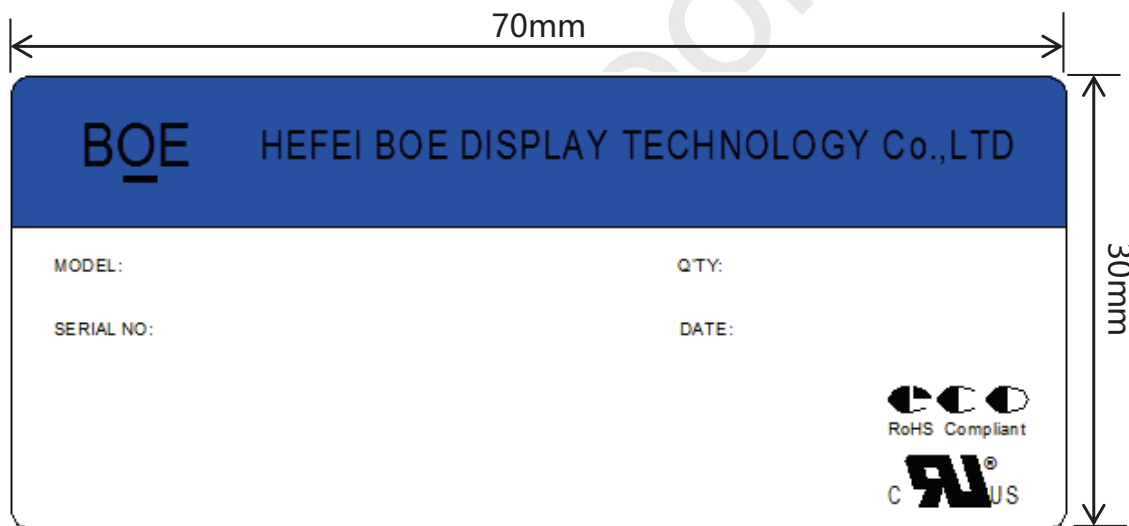

### Box ID Naming Rule:

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	9	2	0	3	5	9	4	2	0	0
Description	Products GBN		Grade	Line	Year		Mon th	Revision Code	Serial No 00001-ZZZZZZ				

### 10.4 Packing Material ESD Specification

Item	SPEC
Surface Resistance [10 <sup>n</sup> Ω]	Control by 10 <sup>6</sup> ~10 <sup>11</sup> - Box, Spacer

<b>BOE</b>	<b>PRODUCT GROUP</b>	<b>REV</b>	<b>ISSUE DATE</b>
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification		PAGE 29 OF 31

## 11.0 HANDLING & CAUTIONS

### (1) Cautions when taking out the Panel

- Pick the pouch only, when taking out panel from a shipping package.

### (2) Cautions for handling the panel

- As the electrostatic discharges may break the LCD panel, handle the LCD panel with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD panel should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD panel is operating.
- Put the panel display side down on a flat horizontal plane.
- Handle connectors and cables with care.

### (3) Cautions for the operation

- When the panel is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the panel would be damaged.

### (4) Cautions for the atmosphere

- Dew drop atmosphere should be avoided.
- Do not store and/or operate the LCD panel in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.

### (5) Cautions for the panel characteristics

- Do not apply fixed pattern data signal to the LCD panel at product aging.
- Applying fixed pattern for a long time may cause image sticking.


### (6) Other cautions

- Do not disassemble and/or re-assemble LCD panel.
- Do not re-adjust variable resistor or switch etc.
- When returning the panel for repair or etc., Please pack the panel not to be broken. We recommend to use the original shipping packages.

<b>BOE</b>	<b>PRODUCT GROUP</b>	REV	ISSUE DATE
	TFT- LCD PRODUCT	P2	2020.12.14
SPEC. NUMBER NO.S8-65-AA-047	SPEC. TITLE DV430FHB-N10(Rev.2.1) Product Specification	PAGE 30 OF 31	

**12.0 APPENDIX**

< Figure 1. Measurement Set Up >

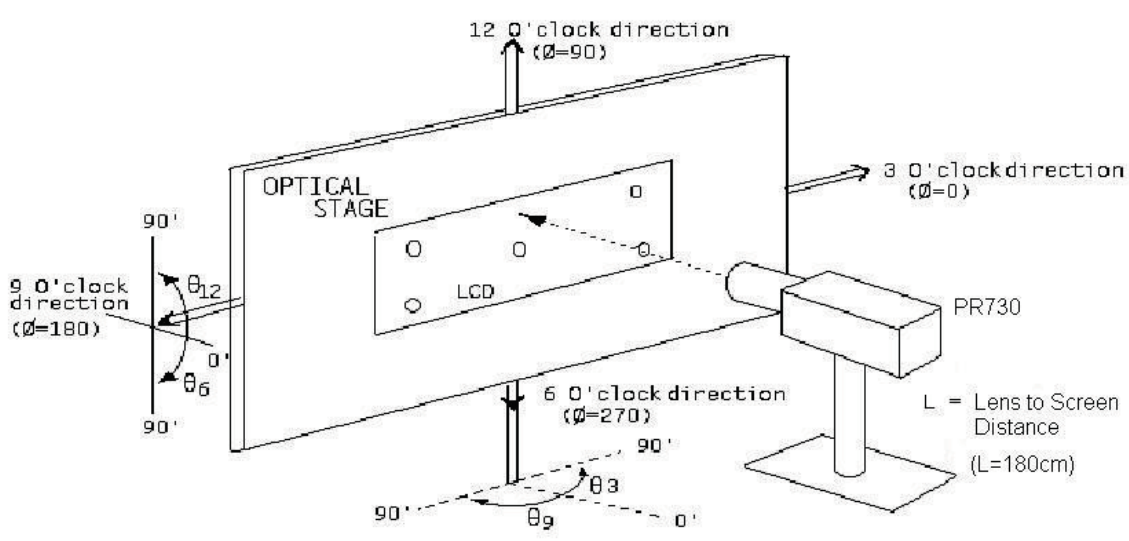

< Figure 2. Response Time Testing >

