
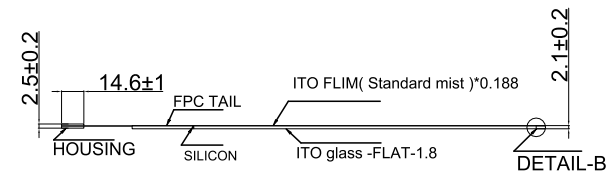
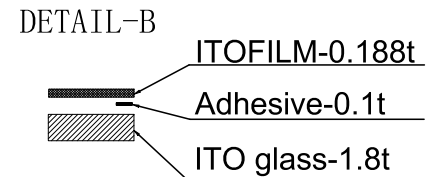
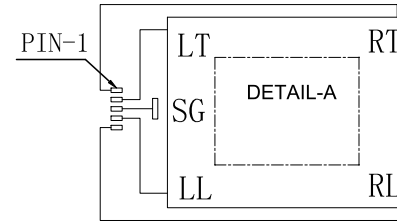


Ver.	Modify No.	Details	Area	P.I.C	Date

CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	RT
2	LT
3	SG
4	LL
5	RL

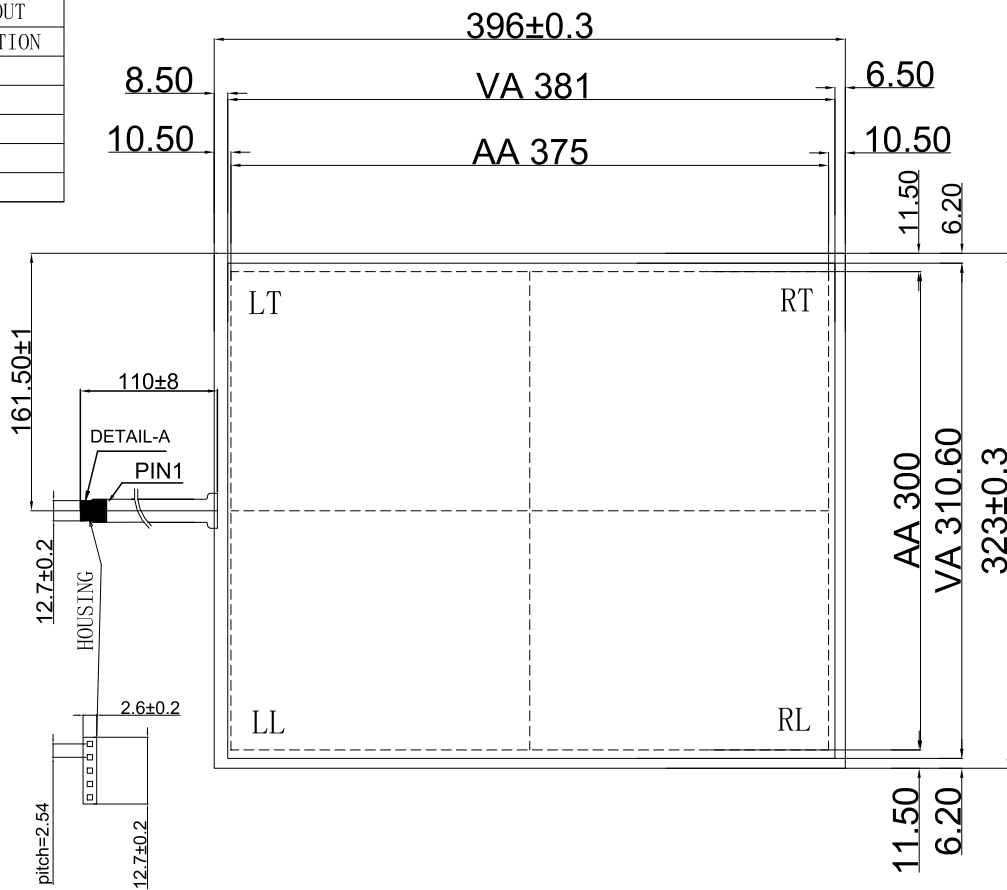

**Instruction:**

- Type: Film to Glass
- Operating Voltage: 3~7V
- Response Time: ≤15ms
- Storage Temperature: -20℃ ~ +50℃ / 20%~80%
- Operation Temperature/Humidity: -10℃ ~ +50℃ / 20%~80%
- Hitting Life: >10,000,000 Times, 100gf Force
- Writting Life: >100,000 Times, 100gf Force
- Connect Material: FPC
- Film Thickness: 0.188mm
- Glass Thickness: 1.8mm
- Light Transmission: 78%±8%
- Force: 100g or less
- Linearity: ≤3.0%
- Insulation: ≥20MΩ
- Surface Hardness: ≥3H(pencil)
- Unmarked tolerance as ±0.5

Designed by:	Curry.Wang	Business Unit: SNT-BTP	Period Mark	View Angle	Ratio
Checked by:	Betty.Fu		A		1:1
Approved by:	Cale.Chen		Total 1 Page		
Workmanship:	Gavin	BOM Code	1.14.190.01.0000		
Standardization:	Link.Chen	Product Series	BTP-RT		
Released by:	Rocky.Liu	Page 1		Total 1 Page	
E-File Name: R190S220811		思诺泰科创电子(苏州)有限公司 SINO ELECTRONICS INC.			