Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

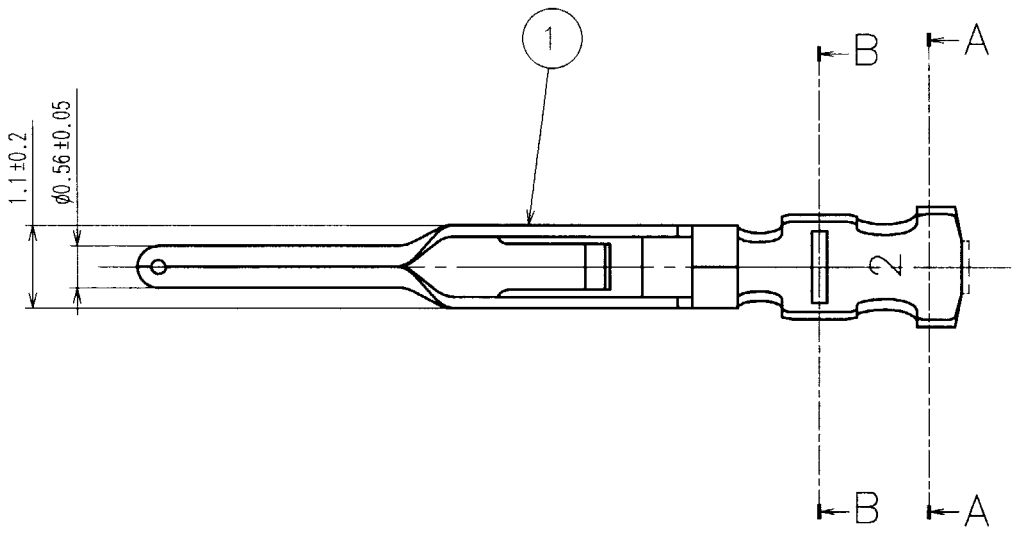

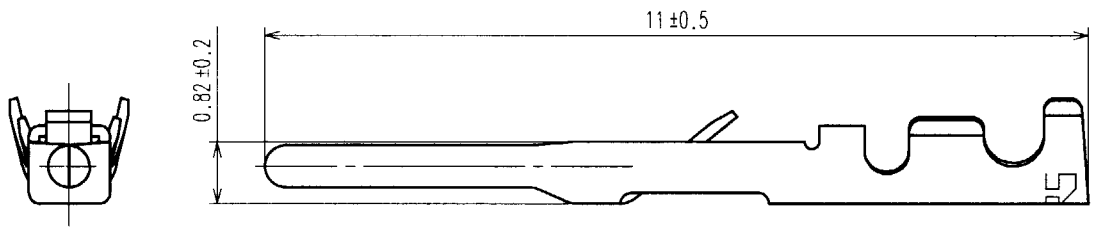

B-B(20:1)



A-A(20:1)



3 FIG.1 RECOMMENDED CABLE PREPARATION DIMENSIONS



HRS DRAWING FOR REFERENCE

NOTES 1 THIS PRODUCT IS APPLY TO THE WIRE 26-30 AWG(WIRE JACKET DIAMETER ø1 MAX).
2 APPLICABLE OPERATION CRIMP TOOL:HT102/HR30-1
3 RECOMENDED CABLE PREPARATION DIMENSIONS ARE SHOWN IN FIG.1.
4 PER PACK:100 CONTACTS

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING			

CODE NO.(OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	H.Zemba 01.01.05	H.Zemba 01.01.05	E.Kumii 01.01.05	M.Yoshida '01.01.10	. .

SCALE 10 : 1	DRAWING NO. EDC3-112589	PART NO. HR30-PC-111
UNITS mm	HRS HIROSE ELECTRIC CO., LTD	CODE NO. CL130-0022-3 1/1

TO
R