
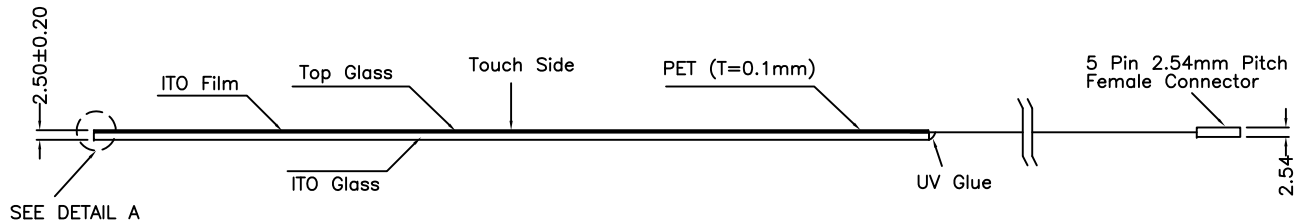
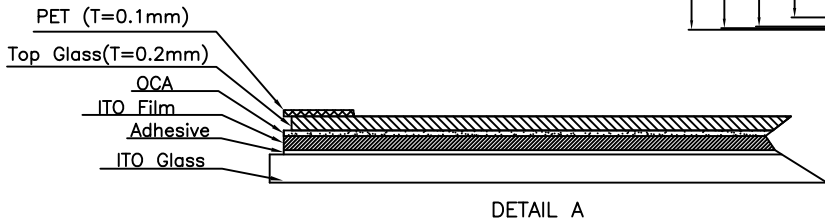


TOUCH SIDE VIEW

CONNECTOR PINOUT	
PIN#	DESIGNATION
1	UR
2	LR
3	S
4	UL
5	LL

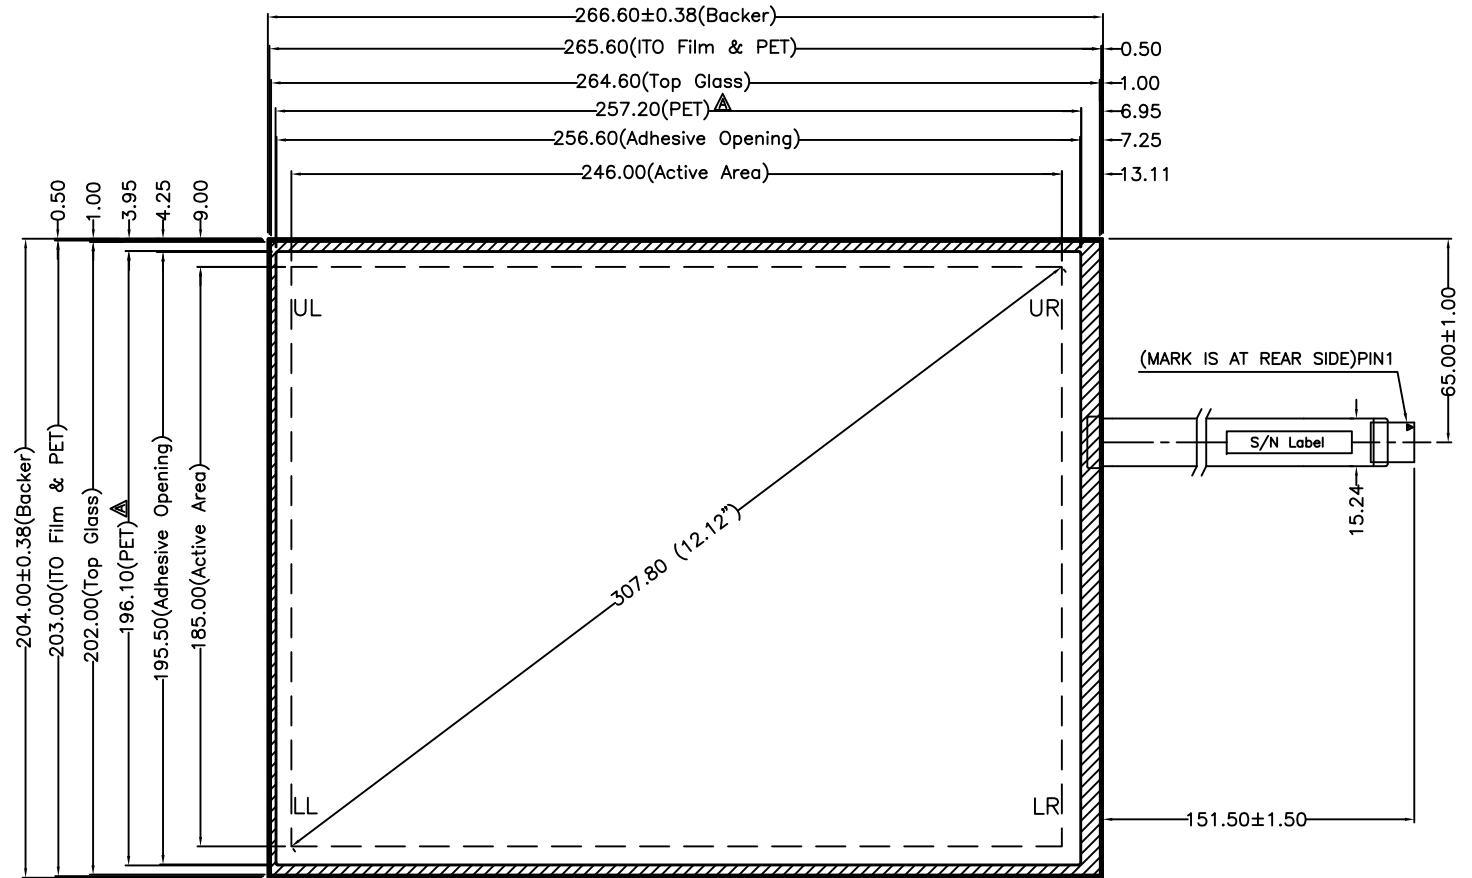

NOTES:

1. ITO GLASS THICKNESS : 1.80mm (Chemically Strengthened Glass)
 2. OVERALL THICKNESS : 2.50±0.20mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. TOP GLASS SURFACE TYPE : CLEAR
 5. LAYER TO LAYER ASSEMBLY TOLERANCE : ±0.50mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 7. OTHER SPEC : SEE APPROVAL SHEET
- * PLEASE REFER TO GFG INTEGRATION GUIDE BEFORE ASSEMBLY FOR SPECIAL ATTENTION.



A.	JUN 29, 2010	MODIFY PET DIMENSIONS	Alex
NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Ruru	DATE	JUN. 01, 2012
SHT	1	OF	1
REV.			A

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 16003A
.X	± 0.50	DWG NO : 16003-1-012
.XX	± 0.50	
.XXX	± 0.30	SCALE: 1:1 UNIT: mm
ANGULAR	.	