

Model Name: P320HVN07.0

Issue Date: 2019/12/06

()Preliminary Specifications (*)Final Specifications

Customer Signature	Date	AUO	Date	
Approved By	70500,	Approval By PM Director CT Wu	CTWu*	
Note Symmetry 20200		Reviewed By RD Director Jack Hsu Reviewed By Project Leader Chinese Wu Reviewed By Project Leader		
	200	Prepared By PM Lorenz Shiau		



	Contents General Description	
1.	General Description	4
2.	Absolute Maximum Ratings	6
3.	Optical Specification	7
4.	Interface Specification	10
4.1	Input power	10
4.2	Input Connection	11
4.3	Input Data Format	13
	4.3.1 LCD Pixel Format	13
	4.3.2 LVDS Data Format	13
	4.3.3 Color Input Data Reference	
5.	Signal Timing Specification	15
5.1	Input Timing	
	5.1.1 Timing table	15
5.2		17
	5.2.1 LVDS spec	17
5.3	Power Sequence for LCD	20
6.	Backlight Specification	21
6.1	Electrical specification	21
6.2	Input Pin Assignment	22
6.3	Power Sequence for Backlight	24
7.	Mechanical Characteristics	25
8.	Reliability Test Items	28
9.	International Standard	29
9.1	Safety	
9.2		
10.	Packing	30
10.1	1 Definition of Label	30
10.2	2 Packing Methods	31
10.3	3 Pallet and Shipment Information	32
11.	Precautions	33
11.1	1. Mounting Precautions	33
11.2	2. Operating Precautions	33
11.3	3. Operating Condition for Public Information Display	34
11.4	4. Electrostatic Discharge Control	34
	5. Precautions for Strong Light Exposure	
11.6		
11.7	7. Handling Precautions for Protection Film	35
11.8	3. Dust Resistance	



Record of Revision

Version	Date	Page	Description
0.0	2019/07/22	All	1st release
0.1 2019/08/-		4	General description is revised. Items Specification Unit Note Front Bazel Surface finish Black SECC " See Chapter 11.3 for details Frame Rate 60 Hz See Chapter 5.1 for details LED Life 70K hours See Chapter 6.1 for details
	60	6	Operating temperature is revised: "0~50"→"-20~60".
		10	The definition of input power is revised. Item=
	2040/08/42	21	The definition of backlight power is revised. Item
	2019/06/12	23	The range of PWM dimming is revised. Control range 0% 100% External PWM Dimming 100% Performance guaranteed dimming range: 0%, 5~100%
		28	Reliability Test Items are revised. Test Item. Q'ty. Condition. High temperature operation test. High temperature and High humidity operation (THB). 3. 60°C 75% 500hrs.
		30-32	Packing specification is revised: 5pcs/Carton→4pcs/Carton.
		34	Normal operating condition is revised. (2) Operation usage to protect against image sticking due to long-term static display. A. Suitable operating time: under 24 hours a day. (**The moving picture can be allowed for 24 hours a day).
	<0	7	Color Coordinates updated.
		10	LCD Power Supply Input Current updated.
1.0	2019/12/06	21	Backlight Power Consumption updated.
1.0	2013/12/00	26-27	Drawings updated.
		32	Packing weight updated: 26.3kg→25kg
		36	Adding the drawing for dust resistance.
			10 1 1nt 10:53
			2012



1. General Description

This specification applies to the 31.5 inch Color TFT-LCD Module P320HVN07.0. This LCD module has a TFT active matrix type liquid crystal panel 1920 x 1080 pixels, and diagonal size of 31.5 inch. This module supports 1920 x 1080 mode. Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot.

P320HVN07.0 has been designed to apply the 2 channel LVDS interface method. It is intended to support displays where high brightness, wide viewing angle, high color saturation, and high color depth are very important. Advanced wide temperature Liquid Crystal (-40~110°C) is also applied on this model to enhance the sunlight readability.

* General Information

* General Information			
Items	Specification	Unit	Note
Active Screen Size	31.5	inch	
Display Area	698.4 (H) x 392.85(V)	mm	
Outline Dimension	721.2(H) x 415.65(V) x 33.8(D)	Mm	D: front bezel to B/B
Bezel Opening	701.4(H) x 395.85(V)	mm	
Bezel Width	9.9/9.9/9.9/9.9	mm	U/D/L/R
Front Bezel Surface finish	Black SECC		
Driver Element	a-Si TFT active matrix		
Display Colors	8 bit(16.7 million)	Colors	4.4
Number of Pixels	1920x1080	Pixel	Dull
Pixel Pitch	0.3637 (H) x 0.3637 (W)	mm	
Pixel Arrangement	RGB vertical stripe		
Display Operation Mode	Normally Black	c 3	
Surface Treatment	Anti-Glare, 3H		Haze 28%
Rotate Function	Unachievable		Note 1
Display Orientation	Portrait/Landscape Enabled		Note 2
Operating Time	24/7		See Chapter 11.3 for details
Frame Rate	60	Hz	See Chapter 5.1 for details
LED Life	70K	hours	See Chapter 6.1 for details




Note 1: Rotate Function refers to LCD display could be able to rotate. This function does not work in this model.


Note 2:

- (1) Landscape Mode: The default placement is T-Con Side on the lower side and the image is shown upright via viewing from the front.
- (2) Portrait Mode: The default placement is that T-Con side has to be placed on the left side via viewing from the front.

Landscape (Front view)



Portrait (Front view)





2. Absolute Maximum Ratings

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit


Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	V_{DD}	-0.3	14	[Volt]	Note 1
Input Voltage of Signal	Vin	-0.3	4	[Volt]	Note 1
Operating Temperature	ТОР	-20	+60	[°C]	Note 2
Operating Humidity	НОР	10	90	[%RH]	Note 2
Storage Temperature	TST	-20	+60	[°C]	Note 2
Storage Humidity	HST	10	90	[%RH]	Note 2
Panel Surface Temperature	PST		65	[°C]	Note 3

Note 1: Duration:50 msec.

Note 2: Maximum Wet-Bulb should be 39°C and No condensation.

The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less. At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

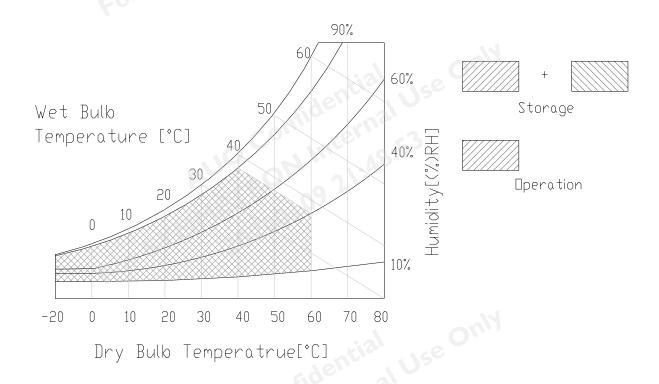Note 3: Surface temperature is measured at 50℃ Dry condition






3. Optical Specification

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 45 minutes in a dark environment at 25°C. The values specified are at an approximate distance 500 mm from the LCD surface at a viewing angle of ϕ and θ equal to 0° .

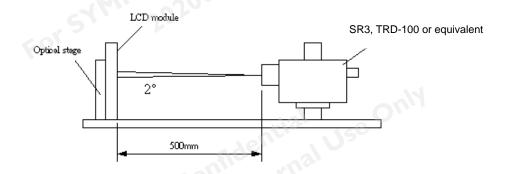Fig.1 presents additional information concerning the measurement equipment and method.



Parameter		Cumphal		Values		Unit					
	Parameter	Symbol	Min. Typ. Max		Max	Unit	Notes				
Contrast Ratio		CR	3200	4000			1				
Surfac	e Luminance (White)	Lwh	2000	2500		cd/m ²	2				
Lumin	ance Variation	б wніте(9Р)			1.33		3				
Respo	nse Time (G to G)	Тү		8	10	ms	4				
Color	Gamut	sRGB		72		%					
Gamm	na	Gma	1.9	2.2	2.5						
Color	Coordinates		eder	10:							
	Red	R _X	OUL	0.614							
		Ry	1100	0.330							
	Green	G _X	2	0.335	Typ.+0.03						
		G _Y	Tvn 0.03	0.571							
	Blue	Bx	Typ0.03	Тур0.03	Тур0.03	Тур0.03	Тур0.03	0.165	Тур.+0.03		
	,5	B _Y		0.111							
	White	Wx		0.313							
		W_{Y}		0.329							
Viewin	g Angle						5				
	x axis, right(φ=0°)	θr		89	e	degree					
	x axis, left(φ=180°)	θι	6-96/	89		degree					
	y axis, up(φ=90°)	θ_{u}	O L	89		degree					
	y axis, down (φ=270°)	$\theta_{\sf d}$	7-710	89		degree					



Note:

1. Contrast Ratio (CR) is defined mathematically as:

- 2. Surface luminance is luminance value at point 5 across the LCD surface 50cm from the surface with all pixels displaying white. From more information see FIG 2. LED current I_F = typical value (without driver board), LED input VDDB =24V, I_{DDB}. = Typical value (with driver board), L_{WH}=Lon5 where Lon5 is the luminance with all pixels displaying white at center 5 location.
- 3. The variation in surface luminance, δ WHITE is defined (center of Screen) as: $\delta_{WHITE(9P)} = Maximum(L_{on1}, L_{on2},...,L_{on9}) / Minimum(L_{on1}, L_{on2},...L_{on9})$
- 4. Response time T_{γ} is the average time required for display transition by switching the input signal for five luminance ratio (0%,25%,50%,75%,100% brightness matrix) and is based on Frame rate = 60Hz to optimize.

Me	easured Target					
Respo	nse Time	0%	25%	50%	75%	100%
	0%		0% to 25%	0% to 50%	0% to 75%	0% to 100%
	25%	25% to 0%		25% to 50%	25% to 75%	25% to 100%
Start	50%	50% to 0%	50% to 25%		50% to 75%	50% to 100%
	75%	75% to 0%	75% to 25%	75% to 50%		75% to 100%
	100%	100% to 0%	100% to 25%	100% to 50%	100% to 75%	

Ty is determined by 10% to 90% brightness difference of rising or falling period. (As illustrated)

The response time is defined as the following figure and shall be measured by switching the input signal for "any level of gray(bright)" and "any level of gray(dark)".

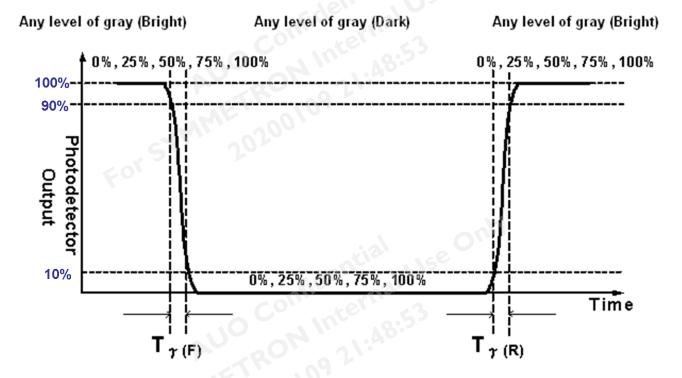
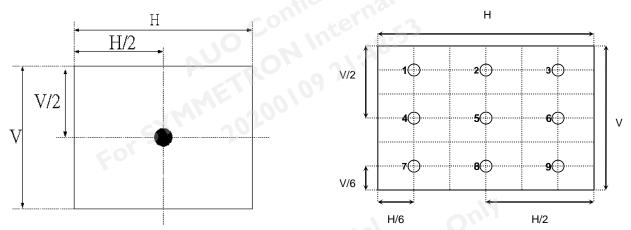


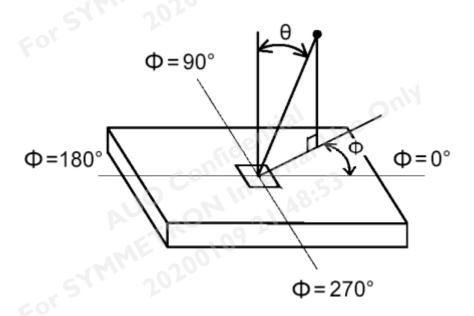


FIG. 2 Luminance



5. Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG3.

FIG.3 Viewing Angle





4. Interface Specification

4.1 Input power

The P320HVN07.0 module requires power inputs which are employed to power the LCD electronics and to drive the TFT array and liquid crystal.

Item		Symbol	Min.	Тур.	Max	Unit	Note
Power Supply Input Voltage		V_{DD}	10.8	12	13.2	V	1
Dower Supply Input Current	Black pattern	I _{DD}	-	0.34	0.41	Α	
Power Supply Input Current	White pattern		-	0.77	0.93	Α	
Power Consumption	Black pattern	Ъ	1	4.08	4.92	Watt	2
Power Consumption	White pattern	Pc	-	9.24	11.16	Watt	
Inrush Current		Irush	2)	0	3	А	3


Note1. The ripple voltage should be fewer than 5% of VDD.

Note2. Test Condition:


- (1) V_{DD} = 12.0V, (2) F_{V} = 60Hz, (3) F_{C} F_{C}
- (5) Power dissipation check pattern. (Only for power design)
- a. Black pattern



b. White pattern



Note3. Measurement condition: Rising time = 400us





4.2 Input Connection


■ LCD connector: FI-RTE51SZ-HF (JAE, LVDS connector) or compatible(CHIEF LAND 115E51-0000RA -M3-R / P-two 187059-5122)

PIN	Symbol	Description	Note
1	N.C.	No connection(for AUO test only. Do not connect)	2
2	N.C.	No connection(for AUO test only. Do not connect)	2
3	N.C.	No connection(for AUO test only. Do not connect)	2
4	N.C.	No connection(for AUO test only. Do not connect)	2
5	N.C.	No connection(for AUO test only. Do not connect)	2
6	N.C.	No connection(for AUO test only. Do not connect)	2
7	LVDS_SEL	Open/High(3.3V) for NS, Low(GND) for JEIDA	3,4
8	N.C.	No connection(for AUO test only. Do not connect)	2
9	N.C.	No connection(for AUO test only. Do not connect)	2
10	N.C.	No connection(for AUO test only. Do not connect)	2
11	GND	Ground	
12	CH1_Y0-	LVDS Channel 1, Signal 0-	
13	CH1_Y0+	LVDS Channel 1, Signal 0+	
14	CH1_Y1-	LVDS Channel 1, Signal 1-	
15	CH1_Y1+	LVDS Channel 1, Signal 1+	
16	CH1_Y2-	LVDS Channel 1, Signal 2-	
17	CH1_Y2+	LVDS Channel 1, Signal 2+	
18	GND	Ground	
19	CH1_CLK-	LVDS Channel 1, Clock -	
20	CH1_CLK+	LVDS Channel 1, Clock +	
21	GND	Ground	
22	CH1_Y3-	LVDS Channel 1, Signal 3-	
23	CH1_Y3+	LVDS Channel 1, Signal 3+	
24	N.C.	No connection(for AUO test only. Do not connect)	2
25	N.C.	No connection(for AUO test only. Do not connect)	2
26	N.C.	No connection(for AUO test only. Do not connect)	2
27	N.C.	No connection(for AUO test only. Do not connect)	2
28	CH2_Y0-	LVDS Channel 2, Signal 0-	
29	CH2_Y0+	LVDS Channel 2, Signal 0+	
30	CH2_Y1-	LVDS Channel 2, Signal 1-	
31	CH2_Y1+	LVDS Channel 2, Signal 1+	
32	CH2_Y2-	LVDS Channel 2, Signal 2-	
33	CH2_Y2+	LVDS Channel 2, Signal 2+	
34	GND	Ground	



35	CH2_CLK-	LVDS Channel 2, Clock -	
36	CH2_CLK+	LVDS Channel 2, Clock +	
37	GND	Ground	
38	CH2_Y3-	LVDS Channel 2, Signal 3-	
39	CH2_Y3+	LVDS Channel 2, Signal 3+	
40	N.C.	No connection(for AUO test only. Do not connect)	2
41	N.C.	No connection(for AUO test only. Do not connect)	2
42	N.C.	No connection(for AUO test only. Do not connect)	2
43	N.C.	No connection(for AUO test only. Do not connect)	2
44	GND	Ground	
45	GND	Ground	
46	GND	Ground	
47	N.C.	No connection(for AUO test only. Do not connect)	2
48	V_{DD}	Power Supply, +12V DC Regulated	
49	V _{DD}	Power Supply, +12V DC Regulated	
50	V _{DD}	Power Supply, +12V DC Regulated	
51	V_{DD}	Power Supply, +12V DC Regulated	

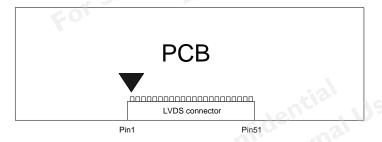Note1. Pin number start from the left side as the following figure.



Note2. Please leave this pin unoccupied. It cannot be connected with any signal (Low/GND/High).

Note3. Input control signal threshold voltage definition

Item	Symbol	Min.	Тур.	Max.	Unit
Input High Threshold Voltage	VIH	2.7		3.6	V
Input Low Threshold Voltage	VIL	0	-	0.6	V

Note4. LVDS data format selection

LVDS_SEL	Mode
H or OPEN	NS
L	JEIDA




4.3 Input Data Format

4.3.1 LCD Pixel Format

no optionies										
at Format	60	ent	cial Use	Out						
	1	2			1	91	9	19	920)
1st Line	R G B R	G B	.48:53		R	G	В	R	G	В
	00100	1.		-		-			-	
		-		-						
		:		:		•			:	
		:	ial	only		•			•	
1080 Line	R G B R	G B	rual Os		R	G	В	R	G	В

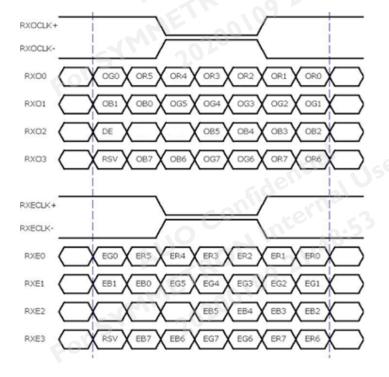4.3.2 LVDS Data Format



W	8 Bit Color Bit Order							
MSB	R7	G7	В7					
	R6	G6	B6					
	R5 G5 B5							
	R4	G4	B4					
	R3	G3	B3					
	R2	G2	B2					
	R1 G1 B1							
LSB	R0	G0	B0					

Note 1:

- a. O = "Odd Pixel Data" E = "Even Pixel Data"
 - b. Refer to 4.3.1 LCD pixel format, the 1st data is 1 (Odd Pixel Data), the 2nd data is 2
 (Even Pixel Data) and the last data is 1920 (Even Pixel Data).



4.3.3 Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 8 bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

COLOR DATA REFERENCE

								. C				npu	t Co	olor	Data	3									
	Color				RI	ED				Oc			GRI	EEN							BL	UE			
	Coloi	MS	В		V.			LS	SB	MS	В					LS	В	MS	В					LS	3B
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	В7	B6	B5	B4	ВЗ	B2	B1	В0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R		at	9																						
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
G										80															
	GREEN(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
В																									
	BLUE(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1



5. Signal Timing Specification

This is the signal timing required at the input of the user connector. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

5.1 Input Timing

5.1.1 Timing table

Timing Table (DE only Mode)


Signal	Item	Symbol	Min.	Тур.	Max	Unit
	Period	Tv	1120	1125	1480	Th
Vertical Section	Active	Tdisp (v)		1080		2160
	Blanking	Tblk (v)	40	45	400	Th
	Period	Th	1030	1100	1325	Tclk
Horizontal Section	Active	Tdisp (h)	V. o.	960		
	Blanking	Tblk (h)	70	140	365	Tclk
Clock	Frequency	Fclk=1/Tclk	53	74.25	82	MHz
Vertical Frequency	Frequency	Fv	47	60	63	Hz
Horizontal Frequency	Frequency	Fh	60	67.5	73	KHz

Notes:

- (1) Display position is specific by the rise of DE signal only.
 Horizontal display position is specified by the rising edge of 1st DCLK after the rise of 1st DE, is displayed on the left edge of the screen.
- (2) Vertical display position is specified by the rise of DE after a "Low" level period equivalent to eight times of horizontal period. The 1st data corresponding to one horizontal line after the rise of 1st DE is displayed at the top line of screen.
- (3) If a period of DE "High" is less than 1920 DCLK or less than 1080 lines, the rest of the screen displays black.
- (4) The display position does not fit to the screen if a period of DE "High" and the effective data period do not synchronize with each other.



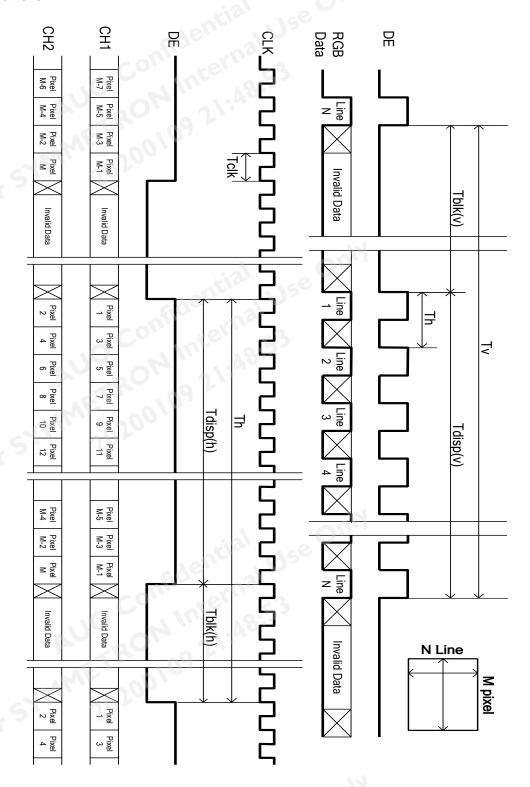5.1.2 Signal Timing Waveform






5.2 Input interface characteristics

5.2.1 LVDS spec

	Parameter	Symbol	2	Value		Unit	Note
	raianietei	Symbol	Min.	Тур.	Max	Offic	Note
	Input Differential Voltage	V _{ID}	200	400	600	mV _{DC}	1
	Differential Input High Threshold Voltage	V _{тн}	+100		+300	mV _{DC}	1
	Differential Input Low Threshold Voltage	V _{TL}	-300		-100	mV _{DC}	1
	Input Common Mode Voltage	VICM	1.1	1.25	1.4	V _{DC}	1
LVDS	Input Channel Pair Skew Margin	tskew (CP)	-500		+500	ps	2
Interface	Receiver Clock : Spread Spectrum Modulation range	Fclk_ss	Fclk -3%	<u>o</u> nli	Fclk +3%	MHz	3
	Receiver Clock : Spread Spectrum Modulation frequency	Fss	30	e	200	KHz	3
	Receiver Data Input Margin Fclk = 85 MHz Fclk = 65 MHz	tRMG	-0.4 -0.5		0.4 0.5	ns	4


Note:

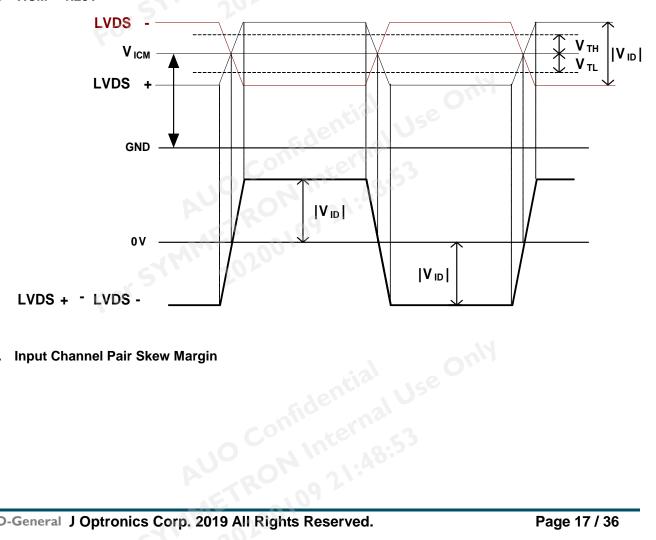1. VICM = 1.25V




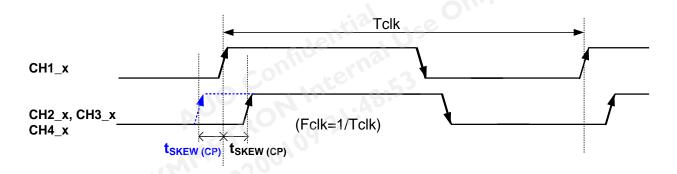2. Input Channel Pair Skew Margin





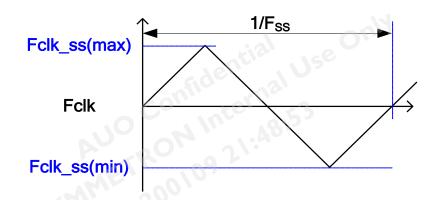
3. LVDS Receiver Clock SSCG (Spread spectrum clock generator) is defined as below figures.



4. Receiver Data Input Margin


Parameter	Cumbal		Rating					
Farameter	Symbol	Min	Min Type		Unit	Note		
Input Clock Frequency	Fclk	Fclk (min)		Fclk (max)	MHz	T=1/Fclk		
Input Data Position0	tRIP1	- tRMG	0	[tRMG]	ns			
Input Data Position1	tRIP0	T/7- tRMG	T/7	T/7+ tRMG	ns			
Input Data Position2	tRIP6	2T/7- tRMG	2T/7	2T/7+ tRMG	ns			
Input Data Position3	tRIP5	3T/7- tRMG	3T/7	3T/7+ tRMG	ns			
Input Data Position4	tRIP4	4T/7- tRMG	4T/7	4T/7+ tRMG	ns			
Input Data Position5	tRIP3	5T/7- tRMG	5T/7	5T/7+ tRMG	ns			
Input Data Position6	tRIP2	6T/7- tRMG	6T/7	6T/7+ tRMG	ns			



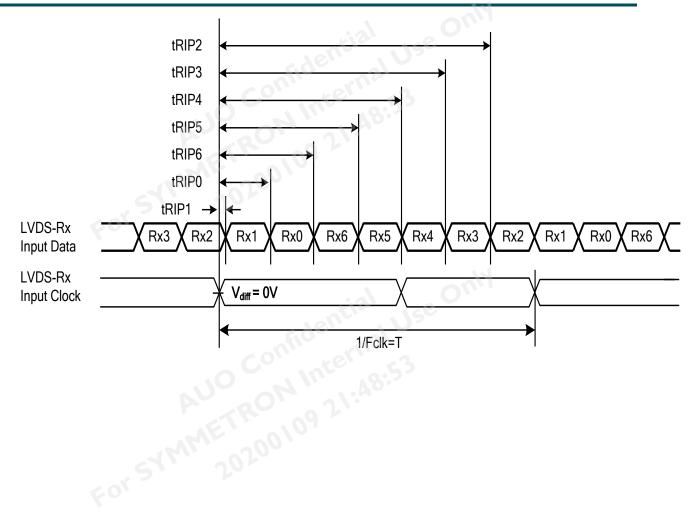



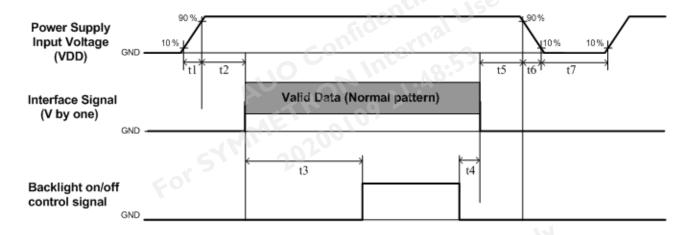5.3 Power Sequence for LCD



Davagastar		Values	150	I Imit
Parameter	Min.	Type.	Max.	Unit
t1	0.4	7 11, 78:2	30	ms
t2	40	2		ms
t3	640	10,		ms
t4	0*1			ms
t5	0			ms
t6			*2	ms
t7	1000			ms
t8	20 ^{*3}	- 	50	ms
t9	0	egen 10		ms

Note:

- (1) t4=0 : concern for residual pattern before BLU turn off.
- (2) t6: voltage of VDD must decay smoothly after power-off. (customer system decide this value)
- (3) When user control signal is N.C. (no connection), opened in Transmitted end, t8 timing spec can be negligible.




6. Backlight Specification

6.1 Electrical specification

	Item	S	ymbol	Condition	Min	Тур	Max	Unit	Note
1	Power Supply Input Voltage	V	/DDB	09 -	22.8	24	25.2	V	-
2	Power Supply Input Current	VI	I _{DDB}	VDDB=24V	3.52	3.81	4.19	Α	1
3	Power Consumption		P _{DDB}	VDDB=24V	84.39	91.54	100.62	Watt	1
4	Inrush Current		Irush	VDDB=24V			17.43	А	2
5	Control signal voltage	V	Hi	VDDB=24V	2		5.5	V	ı
3	Control signal voltage	V _{Signal}	Low	VDDB=24V	0)9	e_	0.8	V	3
6	Control signal current		Signal	VDDB=24V	a	-	1.5	mA	-
7	External PWM Duty ratio (input duty ratio)	D_	EPWM	VDDB=24V	0	-	100	%	4
8	External PWM Frequency	F	EPWM	VDDB=24V	120	1	960	Hz	4
9	DET status signal	DET	HI	VDDB=24V	Оре	en Colle	ctor	V	5
9	DET Status Signal	DET	Lo	VDDB=24V	0	-	0.8	V	5
10	Input Impedance		Rin	VDDB=24V	300			Kohm	-
11	LED lifetime	Ľ	TLED	-	70,000		114	Hr	6

Note 1: Dimming ratio= 100%, (Ta=25±5°C, Turn on for 45minutes)

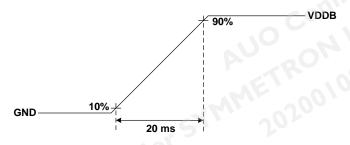Note 2: MAX input current while DB turn on, measurement condition VDDB rising time=20ms(VDDB: 10%~90%)



Note 3: When BLU off (VDDB = 24V, VBLON = 0V), IDDB (max) = 0.1A

Note 4: Less than 5% dimming control is functional well and no backlight shutdown happened

Note 5: Normal: 0~0.8V; Abnormal: Open collector

Note 6: The lifetime (MTTF) is defined as the time which luminance of LED is 50% compared to its original value. [Operating condition: Continuous operating at Ta = 25±2°C, for single LED only]



6.2 Input Pin Assignment

LED DB connector: CI0114M1HRL-NH(CviLux)

Pin	Symbol	Description	Note
1	VDDB	Power Supply Input Voltage	
2	VDDB	Power Supply Input Voltage	
3	VDDB	Power Supply Input Voltage	
4	VDDB	Power Supply Input Voltage	
5	VDDB	Power Supply Input Voltage	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	GND	Ground	
10	GND	Ground	
11	DET	BLU status detection:	1
12	VBLON	BLU On-Off control:	2,3
13	NC NC	NC	4
14	PDIM	External PWM	2, 5

Note1. DET status

NOIC1. D	Li Status						
	DET	BLU status					
	0 ~ 0.8V	Normal					
	Open collector	Abnormal					
Recomm	end pull high R > 10	OK ohm, pull hig	h voltage	VDD =	3.3V		
Note2. ir	nput control signal	threshold volt	age defi	nition			
	Itom		Symbol	Min	Typ	May	Linit

Item	Symbol	Min.	Тур.	Max.	Unit
Input High Threshold Voltage	VIH	2		5.5	V
Input Low Threshold Voltage	VIL	0	-	8.0	V

Note3. VBLON

Mode selection

VBLON	Note
H or OPEN	BL On
L	BL Off

Note4. Please leave this pin unoccupied. It cannot be connected by any signal (Low/GND/High).



Note5. PDIM

PWM Dimming range:

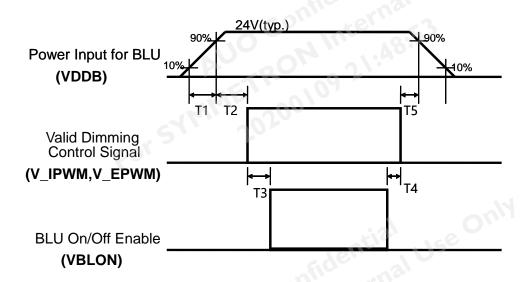


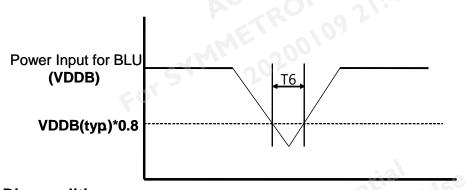
External PWM function dimming ratio 0%~100%, Judge condition as below:

- (1)Backlight module must be lighted ON normally.
- (2) All protection function must work normally.
- (3)Uniformity and flicker could be guaranteed at External PWM function dimming ratio 5%~100%



6.3 Power Sequence for Backlight





Dip condition

Parameter	Min	Тур	Max	Units
T1	20	. 09 1	-	ms *1
T2	250	001-	-	ms
Т3	200			ms
T4	0	-	-	ms
T5	0	-	-	ms
Т6		-	1000	ms ^{*2}

Note:1. T6 describes VDDB dip condition and VDDB couldn't lower than 10% VDDB.




7. Mechanical Characteristics

The contents provide general mechanical characteristics for the model P320HVN07.0. In addition the figures in the next page are detailed mechanical drawing of the LCD.

ı	tem	Dimension	Unit	Note			
	Horizontal	721.2	mm				
Outline Dimension	Vertical	415.65	mm				
	Depth (Dmin)	33.8	mm	Front bezel to Back Bezel			
	Depth (Dmax)	58.5	mm	Front Bezel to Wall Mount			
Weight	5.2	200 Interne	Kg				
For SYMMETRON 21:48.							




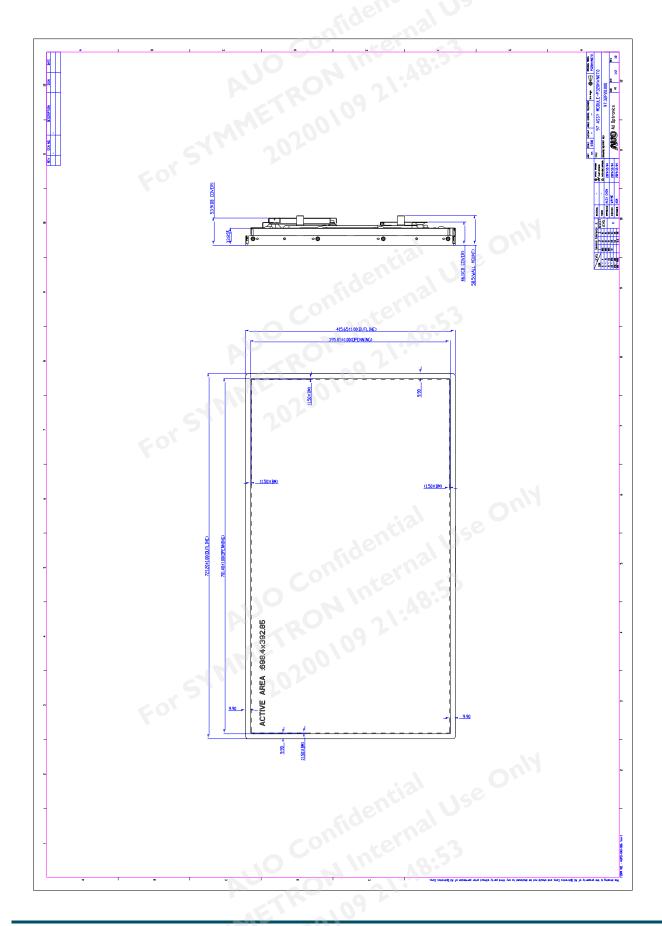Front View





Back View

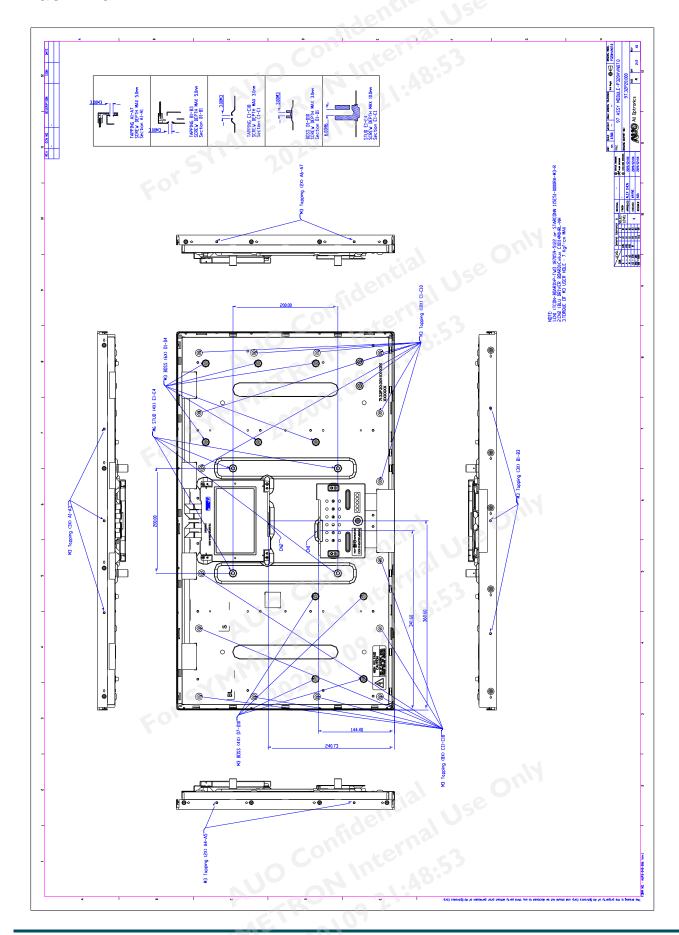



8. Reliability Test Items

Test Item	Q'ty	Condition
High temperature storage test	3	60°С, 500hrs
Low temperature storage test	3	-20°C, 500hrs
High temperature operation test	3	50°C, 500hrs
High temperature and High humidity operation(THB)	3	60℃75%, 500hrs
Low temperature operation test	3	-20°C, 500hrs
Vibration test (With carton)	1(PKG)	Random wave (1.04Grms 2~200Hz) Duration: X,Y,Z 20min per axes
Drop test (With carton)	1(PKG)	Height: 25.4 cm Direction: Only bottom flat twice (ASTMD4169-I)



9. International Standard

9.1 Safety

- rual Use Onl (1) UL 60950-1; Standard for Safety of Information Technology Equipment Including electrical Business Equipment.
- (2) IEC 60950-1; Standard for Safety of International Electrotechnical Commission
- (3) EN 60950-1; European Committee for Electrotechnical Standardization (CENELEC), EUROPEAN STANDARD for Safety of Information Technology Equipment Including Electrical Business Equipment.

9.2 EMC


- (1) ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electrical Equipment in the Range of 9kHz to 40GHz. "American National standards Institute(ANSI), 1992
- (2) C.I.S.P.R "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." International Special committee on Radio Interference.
- (3) EN 55022 "Limits and Methods of Measurement of Radio Interface Characteristics of Information Technology Equipment." European Committee for Electrotechnical Standardization. (CENELEC), Eor Symmerical Use Only 1998

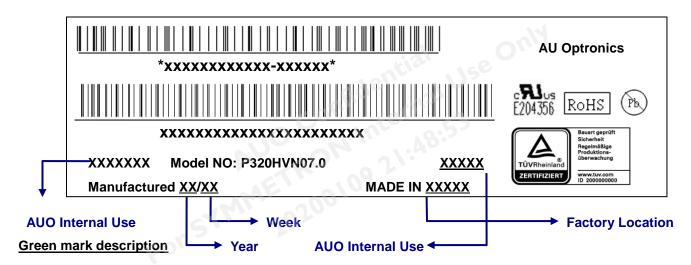


10. Packing

10.1 Definition of Label

A. Panel Label:






- (1) For Pb Free Product, AUO will add (Pb) for identification.
- (2) For RoHs compatible products, AUO will add RoHS for identification.


Note: The green Mark will be present only when the green documents have been ready by AUO internal green team. (definition of green design follows the AUO green design checklist.)

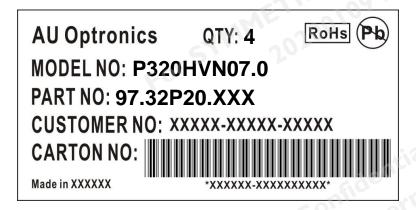B. Carton Label:





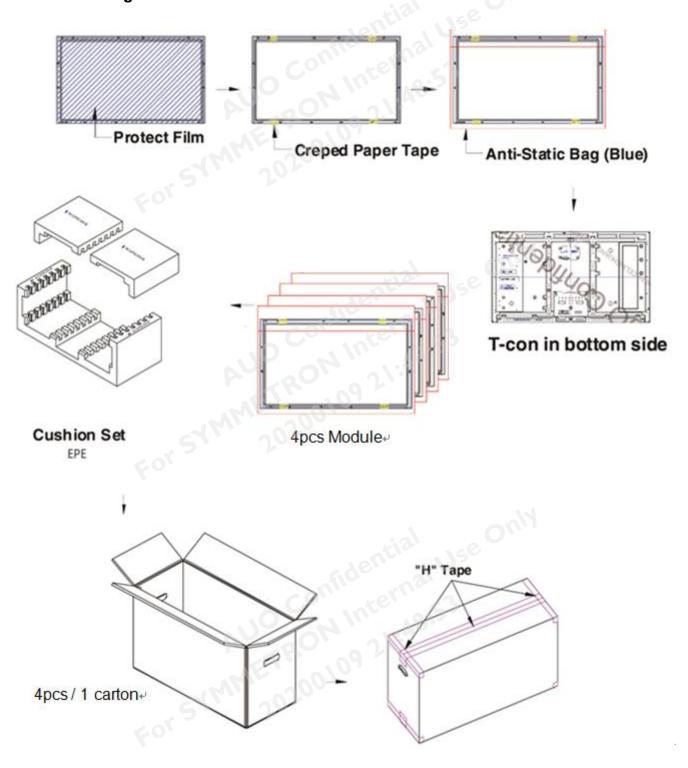
10.2 Packing Methods





10.3 Pallet and Shipment Information

			De alsin er Dama auts			
	Item	Qty. Dimension		Weight (kg)	Packing Remark	
1	Packing Box	4pcs/box	820mm*376mm*537mm	25	Panel 5.2kg	
2	Pallet	1	1150mm*840mm*132mm	15.6		
3	Boxes per Pallet		6 boxes/pallet			
4	Panels per Pallet	24 pcs/pallet				
5	Pallet	24	1150mm*840mm*1206mm	165.6		

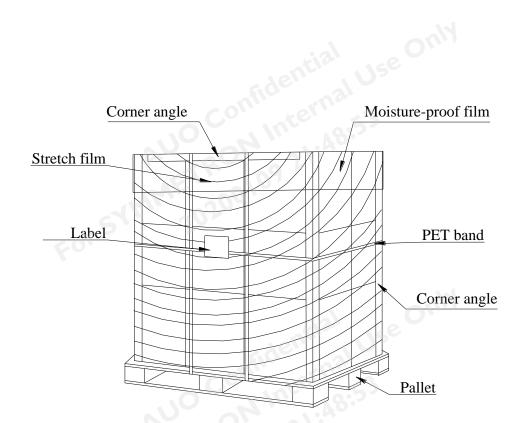



11. Precautions

Please pay attention to the followings when you use this TFT LCD module.

11.1. Mounting Precautions

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer. Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter cause circuit broken by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizer with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front/ rear polarizer. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

11.2. Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage: V=±200mV(Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it may become lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- (6) Module has high frequency circuits. Sufficient suppression to the electromagnetic



interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interface.

(7) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

11.3. Operating Condition for Public Information Display

The device listed in the product specification is designed and manufactured for PID (Public Information Display) application. To optimize module's lifetime and function, below operating usages are required.

- (1) Normal operating condition
 - A. Operating temperature: 20~60°C
 - B. Operating humidity: 10~90%
 - C. Display pattern: dynamic pattern (Real display).Note) Long-term static display would cause image sticking.
- (2) Operation usage to protect against image sticking due to long-term static display.
 - A. Suitable operating time: 24 hours a day
 - B. Liquid Crystal refresh time is required. Cycling display between 5 minutes' information (static) display and 10 seconds' moving image.
 - C. Periodically change background and character (image) color.
 - D. Avoid combination of background and character with large different luminance.
- (3) Periodically adopt one of the following actions after long time display.
 - A. Running the screen saver (motion picture or black pattern)
 - B. Power off the system for a while
- (4) LCD system is required to place in well-ventilated environment. Adapting active cooling system is highly recommended.
- (5) Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions, such as high temperature/ humidity, display stationary patterns, or long operation time etc..., it is strongly recommended to contact AUO for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.

11.4. Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.



11.5. Precautions for Strong Light Exposure

- (1) Strong light exposure causes degradation of polarizer and color filter.
- (2) To keep display function well as a digital signage application, especially the component of TFT is very sensitive to sunlight, it is necessary to set up blocking device protecting panel from radiation of ambient environment.
 rage

11.6. Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

11.7. Handling Precautions for Protection Film

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane.



11.8. Dust Resistance

- (1) AUO module dust test is conducted with marked holes (see Figure 1) sealed to comply with JIS D0207.
- (2) Module users should design set with these holes used/sealed (if not used) or covered by set mechanism to prevent dust from entering. The AUO testing procedure cannot replicate all different real world scenarios, module users should apply set dust resistance solution to meet users' requirement.

