


Part number	<b>LVDS-DF14H-30S-DF13-40DS-300-MSI</b>
Type	LVDS cable
Description	LVDS cable between G190ETN01.2 and MSI 919-98H3-005 , CON1= DF14H-30S CON2= DF13-40DS length = 300 mm
Length	300
Connector 1	DF14H-30S
Connector 2	DF13-40DS



Connector 1 DF14H-30S	Connector 2 DF13-40DS
1 RXin00-	1
2 RXin00+	2
3 RXin01-	3
4 RXin01+	4
5 RXin02-	5 Vcc
6 RXin02+	6 Vcc
7 GND	7
8 RxOCLKIN-	8
9 RxOCLKIN+	9
10 RXin03-	10
11 RXin03+	11
12 RXinE0-	12 GND
13 RXinE0+	13 RXinO1+
14 GND	14 RXinO0+
15 RXinE1-	15 RXinO1-
16 RXinE1+	16 RXinO0-
17 GND	17 GND
18 RXinE2-	18 GND
19 RXinE2+	19 RXinO3+
20 RxECLKIN-	20 RXinO2+
21 RxECLKIN+	21 RXinO3-
22 RXinE3-	22 RXinO2-
23 RXinE3+	23 GND
24 GND	24 GND
25	25 RXinE1+
26	26 RXinE0+
27	27 RXinE1-
28	28 RXinE0-
29 Vcc	29
30 Vcc	30
	31 RXinE3+
	32 RXinE2+
	33 RXinE3-
	34 RXinE2-
	35
	36
	37 RxECLKIN+
	38 RxOCLKIN+
	39 RxECLKIN-
	40 RxOCLKIN-

top view Connector 2 DF13-40DS			
2			1
4			3
6	Vcc	Vcc	5
8			7
10			9
12	GND		11
14	RXin00+	RXin01+	13
16	RXin00-	RXin01-	15
18	GND	GND	17
20	RXin02+	RXin03+	19
22	RXin02-	RXin03-	21
24	GND	GND	23
26	RXinE0+	RXinE1+	25
28	RXinE0-	RXinE1-	27
30			29
32	RXinE2+	RXinE3+	31
34	RXinE2-	RXinE3-	33
36			35
38	RxECLKIN+	RxECLKIN+	37
40	RxOCLKIN-	RxECLKIN-	39

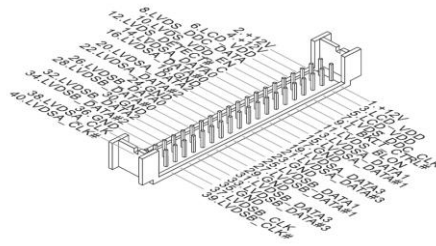