# **Dimensions: [mm]**


	Properties	lest condition	s value	Unit I Ioi.			
W	Impedance @ 100 MHz	Z 100 MHz	1000	Ω ±25%			
2,0	Maximum Impedance	Z <sub>max</sub> 75 MHz	1250	Ω typ.			
	Rated Current 1	$I_{R 1}  \Delta T = 20 \text{ K}$	200	mA max.			
	Rated Current 2	$I_{R2}  \Delta T = 40 \text{ K}$	1300	mA max.			
	DC Resistance	R <sub>DC</sub> @ 20 °C	0.45	Ω max.			
	Туре		Wide Band				
WIDE BAND / HIGH SPEED: $W = 4,2$	Certification:						
HIGH CORRENT. $W = 5,2$	RoHS Approval	Compliant	Compliant [ 2011/65/EU&2015/863 ]				
	REACh Approval	Conform or	declared [ (EC)1907/20	06]			
	Halogen Free	Confo	m [ JEDEC JS709B ]				
Scale - 10:1							
Schematic:							
	General Information:						
	Do not use this part beyond the Rated Current as this will create excessive heat and can harm the component						
	Operating Temperature	-55 up to +125 °C					
	Storage Conditions (in original packaging)	< 40 °C; < 75 % RH					
Moisture Sensitivity Level (MSL)			<b>.)</b> 1				
Test conditions of Electrical				I Properties: +20 °C, 33 % RH if not specified differently			
			PROJECTION METHOD				
		DIN 13U 2708-1M					
RoHS REACH HALOGEN	•	nression					
Würth Elektronik elSos GmbH & Co. KG							
Max-Eyth-Str. 1		7427					
Germany Tel. +49 (0) 79 42 945 - 0	SIZE/TYPE	BUSINESS UNIT	STATUS	PAGE			
WÜRTH ELEKTRONIK Www.we-online.com eiSos@we-online.com	1206	eiSos	Valid	1/6			
	VIDE BAND / HIGH SPEED: W = 4,2 HIGH CURRENT: W = 5,2 Scale - 10:1 Schematic:	2.0       Maximum Impedance         Maximum Impedance         Rated Current 1         Rated Current 2         DC Resistance         Type         WIDE BAND / HIGH SPEED: W = 4.2         HIGH CURRENT: W = 5.2         Scale - 10:1         Schematic:         General Information:         Do not use this part beyond the Rated         Operating Temperature         Storage Conditions (in original packaging)         Moisture Sensitivity Level (MSL)         Test conditions of Electrical Pro         With Electrocoder         Maximum Impedance         Media         Operating Temperature         Storage Conditions of Electrical Pro         Media         Maximum Impedance         Maximum Impedance         Media         Maximum Impedance         Book         Maximum Impedance         Index         Mission Index         Maximum Impedance         Rescale - 10:1	W       Impedance @ 100 MHz       Z       100 MHz         Maximum Impedance       Z <sub>max</sub> 75 MHz         Number of the second state o	W         Impedance @ 100 MHz         Z         100 MHz         120           Maximum Impedance         Z <sub>max</sub> 75 MHz         1250           Rated Current 1         H <sub>1</sub> :1         ΔT = 20 K         200           Rated Current 1         H <sub>1</sub> :1         ΔT = 20 K         200           Rated Current 1         H <sub>1</sub> :1         ΔT = 20 K         200           Bated Current 1         H <sub>2</sub> :1         ΔT = 40 K         1300           DC Resistance         P <sub>100</sub> 40 20 °C         0.45           Type         Wide Band         Complant [2011/65/EU82015/86           Rated Current 2         H <sub>2</sub> :0         Complant [2011/65/EU82015/86           Rate Approval         Complant [2011/65/EU82015/86           Scale - 10:1         Scale - 10:1           Schematic:         On four use this part beyond the Rated Current as this will create excessive heat and component           Operating Temperature         -55 up to +125 °C           Storage Conditions (in original scale - 55 up to +125 °C           Storage Conditions (in Griginal conditions of Electrical Properties: +20 °C, 33 % RH if not specified differed for the Conditions of Electrical Properties: +20 °C, 33 % RH if not specified differed for the Conditions of Electrical Properties: +20 °C, 33 % RH if not specified differed for the Conditions of Electrical Properties: +20 °C, 33 % RH if not specified differed for the Con			

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety restriction. Quipment of were leactrical cruicity expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use, before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require injury and reliability reliability transportation signal, disaster prevention, medical, public information network etc... Wurth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in the require high area reliability evaluation checks for safety must be performed on every electronic component which is used in the reliability of reliability standard and reliability standard and

# **Recommended Land Pattern: [mm]**

**Electrical Properties:** 


# Typical Impedance Characteristics:

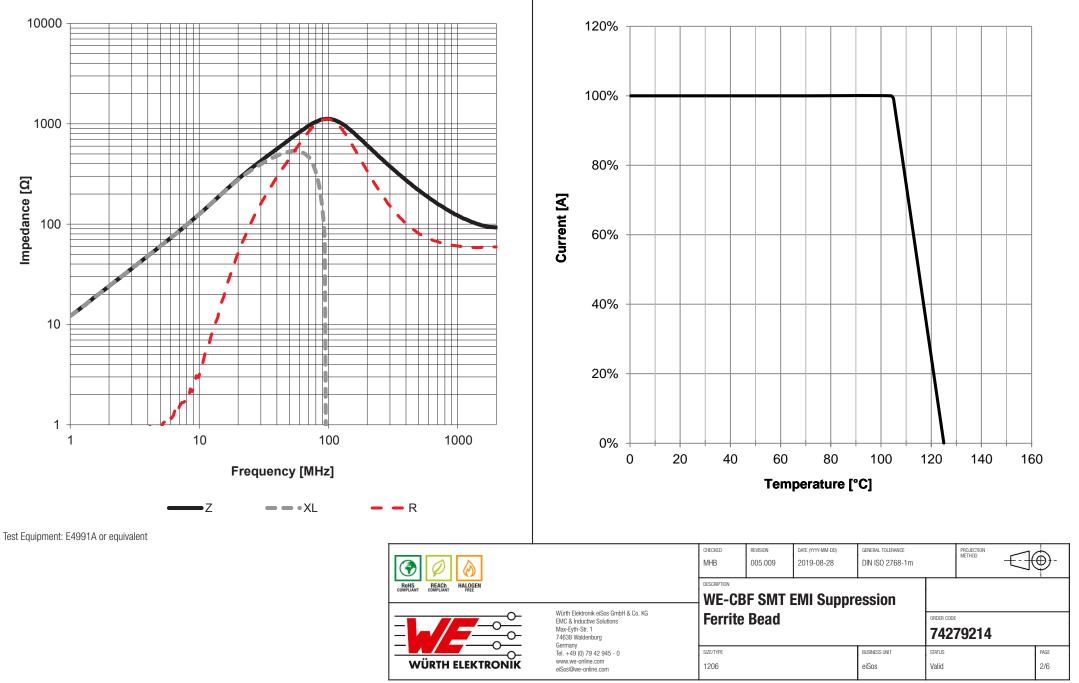

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information intended for use in equivalent is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be information network etc.. Wurth Elektronik elSos GmbH & Co KG must be information intended to use is electronic component which is used in electrical circuits there adjust high standard is especially caused in the electronic component which is used in electrical circuits there are electrical circuits th

## **Derating Curve:**

# Packaging Specification - Tape and Reel: [mm]

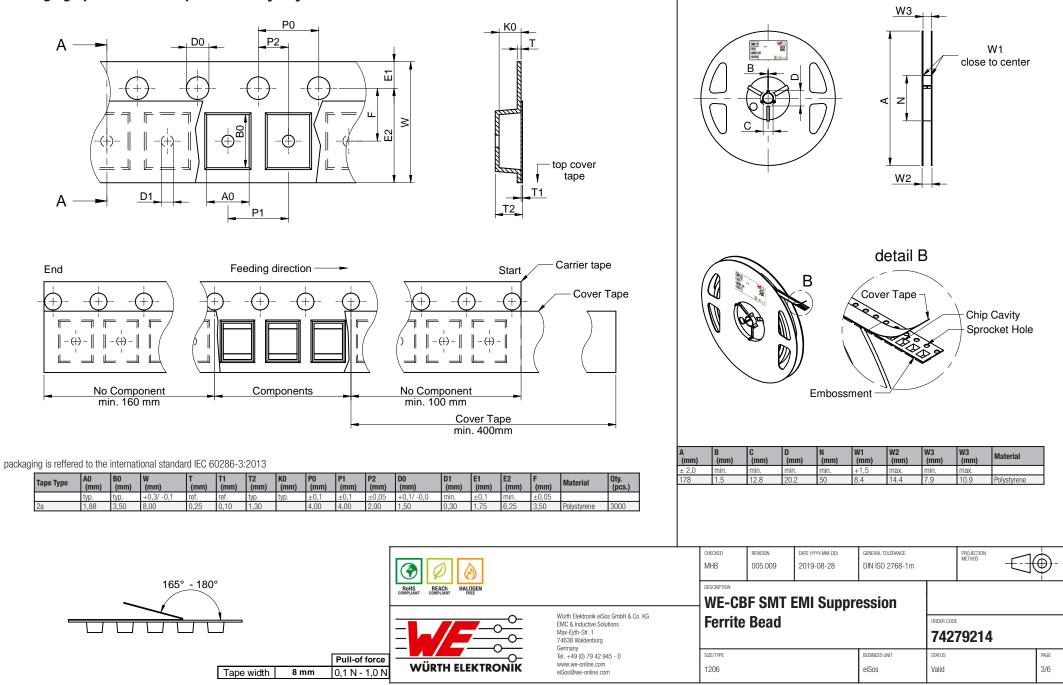

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Wurth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in effectival crustel severation (automotive control, train control, ship control), train control, ship control, train control, ship cont

# **Classification Reflow Profile for SMT components:**



# **Classification Reflow Soldering Profile:**

Profile Feature		Value
Preheat Temperature Min	T <sub>s min</sub>	150 °C
Preheat Temperature Max	T <sub>s max</sub>	200 °C
Preheat Time $t_s$ from $T_{s min}$ to $T_{s max}$	t <sub>s</sub>	60 - 120 seconds
Ramp-up Rate (T <sub>L</sub> to T <sub>P</sub> )		3 °C/ second max.
Liquidous Temperature	TL	217 °C
Time $t_L$ maintained above $T_L$	tL	60 - 150 seconds
Peak package body temperature	Т <sub>р</sub>	see table below
Time within 5°C of actual peak temperaure	t <sub>p</sub>	20 - 30 seconds
Ramp-down Rate (T <sub>L</sub> to T <sub>P</sub> )		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.

refer to IPC/ JEDEC J-STD-020E

# Package Classification Reflow Temperature:

Properties	Volume mm <sup>3</sup> <350	Volume mm <sup>3</sup> 350-2000	Volume mm <sup>3</sup> >2000
PB-Free Assembly   Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly   Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly   Package Thickness $\geq$ 2.5 mm	250 °C	245 °C	245 °C

refer to IPC/ JEDEC J-STD-020E

.		Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com	SIZE/TYPE 1206			BUSINESS UNIT eiSos	status Valid		1	PAGE 4/6
Würth Elektronik elSce GmbH & Co. KG EMC & Inductive Solutions Max Eyth Str. 1 74633 Waldenburg Germany		Ferrite	Bead			ORDER CODE	79214			
ROHS COMPLIANT COMPLIANT HALOGEN		WE-CB	SF SMT	EMI Suppre	ession					
			CHECKED	REVISION 005.009	DATE (YYYY-MM-DD) 2019-08-28	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		€-

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

# **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-CBF of Würth Elektronik eiSos GmbH Co. KG:

#### **General:**

- This electronic component was designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any
  equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control,
  ship control), transportation signal, disaster prevention, medical, public information network, etc. where higher safety and reliability are
  especially required and/or if there is the possibility of direct damage or human injury.
- · Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth
  Elektronik does not warrant any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and
  sustainability over time.
- The customer is responsible for the functionality of their own products. All technical specifications for standard products also apply to customer specific products.

## **Product specific:**

## Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- Wave soldering is allowed for components bigger than 0805 after evaluation and approval.
- All other soldering methods are at the customers' own risk.

## **Cleaning and Washing:**

Washing agents used during the production to clean the customer application may damage or change the characteristics of the wire
insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.

## Potting:

If the product is potted in the costumer application, the potting material may shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components. We recommend a
manual inspection after potting to avoid these effects.

## **Storage Conditions:**

- A storage of Würth Electronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.

#### Handling:

• Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

		CHECKED MHB	REVISION 005.009	DATE (YYYY-MM-DD) 2019-08-28	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	3@-
		WE-CBF SMT EMI Suppression						
		Ferrite	Bead			ORDER CODE	79214	
	elinany () 79 42 945 - 0 www.we-online.com elSos@we-online.com	SIZE/TYPE 1206			BUSINESS UNIT eiSos	status Valid		page 5/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential tracium signal, advantine, transportation (automotive control, train control, ship control), train control, ship control, train control, train control, train control, ship control, train control, ship control, train control, trai

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

## **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

## 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

## 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

## 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

## 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

## 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

## 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

## 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

		CHECKED MHB	REVISION 005.009	DATE (YYYY-MM-DD) 2019-08-28	GENERAL TOLERANCE DIN ISO 2768-1m	-	PROJECTION METHOD	<b>(</b> )-
COMPLIANT COMPLIANT ""PREX"			WE-CBF SMT EMI Suppression					
	Würth Elektronik eiSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany				ORDER CODE	79214		
	Tel. +49 (0) 79 42 945 - 0 www.we-online.com etSos@we-online.com	SIZE/TYPE 1206			BUSINESS UNIT eiSos	status Valid		PAGE 6/6

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed on every electronic component which is used in entential submit and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be information intervork etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usege before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electrical circuits that require high state the require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to every electrical circuits that require high state the require high state to every electrical circuits that require high state to