

# SPECIFICATIONS

Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 100MΩ Min  
 Withstanding Voltage: 500V AC/minute  
 Material:Nylon 6T,UL94V-0

# ORDER INFORMATION

5 W 1 2 5 0 R 0 - 1 X X X X W X U A 0 1

Pitch 1.25mm

1:Single Row

No. of contacts per row

T0:Tin Plated  
G0:Gold Plated

W:White

X:Box









RoHS

B:Bag



AMTEK 糧德  
2020.11.24  
Released DCC

Circuit No.	Dimensions				
	A	B	C	D	E
02P	---	4.25	3.05	3.65	---
03P	2.50	5.50	4.30	4.90	---
04P	3.75	6.75	5.55	6.15	2.50
05P	5.00	8.00	6.80	7.40	3.75
06P	6.25	9.25	8.05	8.65	5.00
07P	7.50	10.50	9.30	9.90	6.25
08P	8.75	11.75	10.55	11.15	7.50
09P	10.00	13.00	11.80	12.40	8.75
10P	11.25	14.25	13.05	13.65	10.00
11P	12.50	15.50	14.30	14.90	11.25
12P	13.75	16.75	15.55	16.15	12.50
13P	15.00	18.00	16.80	17.40	13.75
14P	16.25	19.25	18.05	18.65	15.00
15P	17.50	20.50	19.30	19.90	16.25
16P	18.75	21.75	20.55	21.15	17.50
17P	20.00	23.00	21.80	22.40	18.75
18P	21.25	24.25	23.05	23.65	20.00

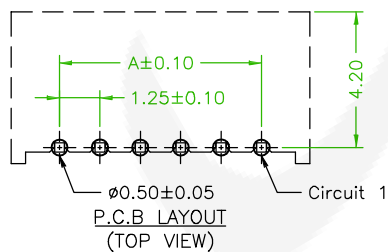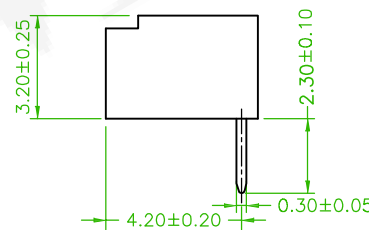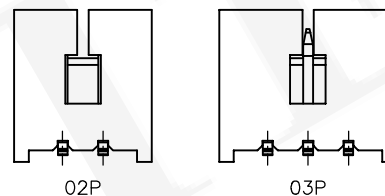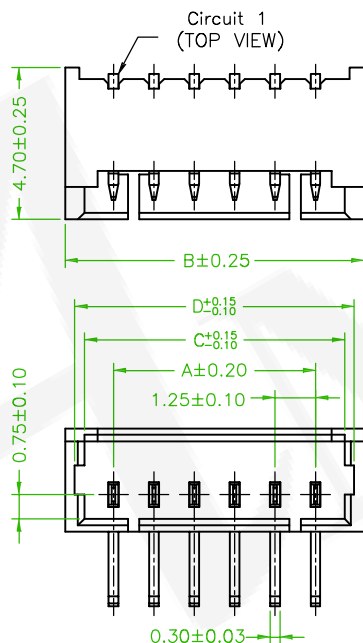

Old Part No.:1250R-XXW-U

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.25mm WAFER RIGHT ANGLE			頁數 Page	1/1
	品號 PART NO.	5W1250R0-1XXXXWXUA01			繪圖 DRAWN	Mia 2015/09/04
	圖號 DRAWING NO.	GW090-BN373	版本 REV.	C	核對 CHECKED	John 2015/09/04
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/04
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Add the Package option	Benson	2020/11/24
△x1	Revised the Drawing	Jeff	2016/10/23