



| | | | | | |
|------|------------|---------|------|-------|------|
| Ver. | modify NO. | Details | Area | P.I.C | Date |
| | | | | | |
| | | | | | |


TOP VIEW

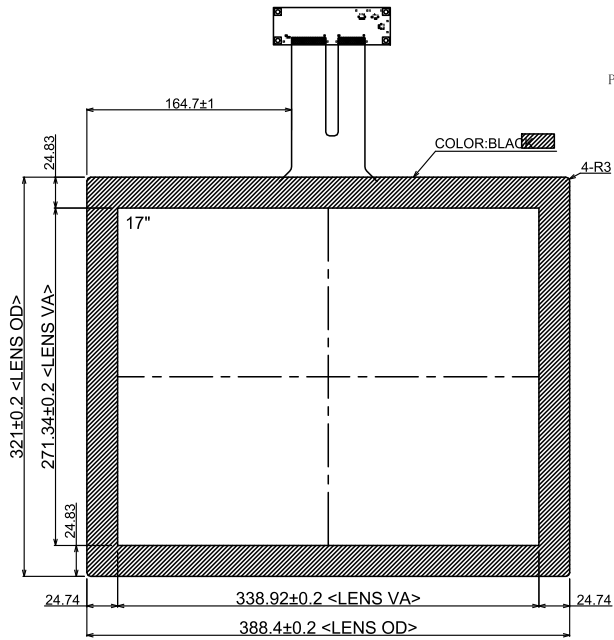



SIDE VIEW

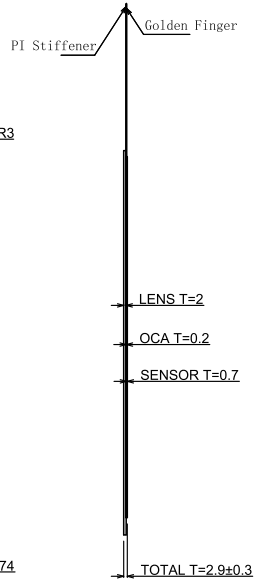

BOTTOM VIEW

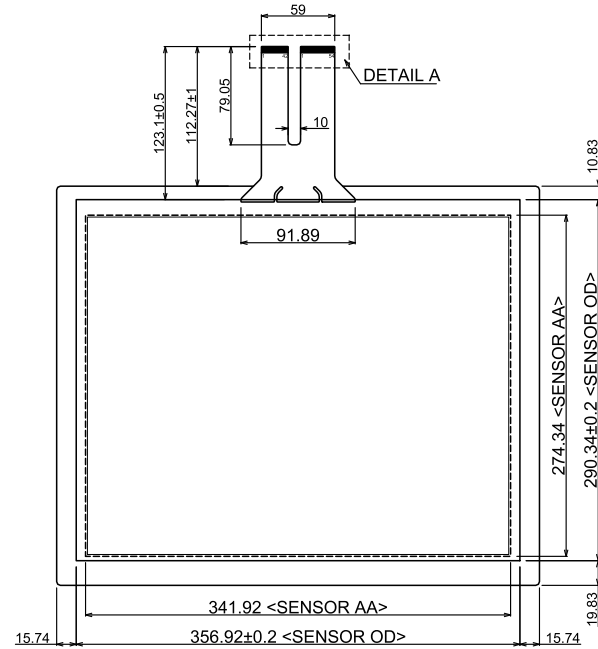

CONTROLLER
SC 2:1

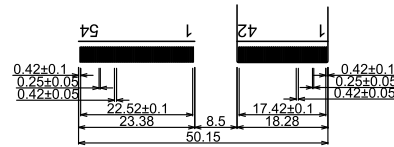

DETAIL A
SC 4:1

USB PIN ASSIGNMENT

| | |
|---|------|
| 1 | VBUS |
| 2 | DN |
| 3 | DP |
| 4 | GND |

Technical Datasheet:

1. Structure: Cover Glass+Glass Sensor
2. Controller IC: ILI2510, COB (ILI2322 for future Replacement)
3. Operating Humidity: 45~85%RH
4. Light transmission: 85%
5. Surface Hardness: ≤6H
6. Operating Temperature: -20°C~+70°C
7. Storage Temperature: -30°C~+80°C
8. Unamrked Tolerance: ±0.2mm
9. All material used conform to RoHS standards

| | | | |
|------------------|--|-------------------------------------|------------------|
| Part No. | SNT-GG-TPB-17-ILI (SNT-ITO-TPB-17-ILI) | | |
| Product Name: | 17inch Touch Panel | Drawing No. | GG170I210525S01 |
| | | Project Code. | GG170IS01 |
| Business Unit: | SNT-BTP | Period Mark | View Angle |
| | | A | Ratio |
| Workmanship: | Tina. Xin | BOM Code | 1.11.170.01.0221 |
| Standardization: | Link.Chen | Product Series | BTP-GG |
| Released by: | Rocky.Liu | Page 1 | Total 1 Page |
| | | 思诺泰科创电子(苏州)有限公司 SINOTRONICS INC. | |