

Features

- Zero reverse recovery current
- Zero forward recovery voltage
- Temperature independent switching behavior
- High temperature operation
- High frequency operation

V_{RRM}	1200V
$I_F (T_C = 151^\circ\text{C})$	20A
Q_c	103nC

Benefits


- Unipolar rectifier
- Substantially reduced switching losses
- No thermal run-away with parallel devices
- Reduced heat sink requirements

Applications

- SMPS, PFC
- Solar application, UPS, EV/HEV
- Motor drives, Wind turbine, Rail traction



TO-220AC



Inner Circuit



G = GPT
5 = Gen5
S = SiC Schottky Diode
120 = Voltage Rating 1200V
20 = Current Rating 20A
A = TO-220AC
DDDDDD = Traceable Code





Maximum Ratings (at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	V_{RRM}	1200	V
Surge Peak Reverse Voltage	V_{RSM}	1200	V
Continuous Forward Current $T_c = 25^\circ\text{C}$ $T_c = 135^\circ\text{C}$ $T_c = 151^\circ\text{C}$	I_F	57.4 27.3 20	A
Repetitive Peak Forward Surge Current $T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$, Half Sine Pulse	I_{FRM}	100	A
Non-Repetitive Forward Surge Current $T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$, Half Sine Pulse	I_{FSM}	230	A
i^2t Value $T_c = 25^\circ\text{C}$, $t_p = 10\text{ms}$, Half Sine Pulse	$\int i^2 dt$	264.5	A^2s
Power Dissipation $T_c = 25^\circ\text{C}$ $T_c = 110^\circ\text{C}$	P_{tot}	250 108	W
Operating Junction Range	T_j	-55 to +175	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to +175	$^\circ\text{C}$
Mounting Torque, M3 Screw	M	1	Nm

Electrical Characteristics (at $T_J = 25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Test Condition	Value			Unit
			min.	typ.	max.	
DC Blocking Voltage	V_{DC}		1200	-	-	V
Forward Voltage	V_F	$I_F = 20\text{A}$ $T_J = 25^\circ\text{C}$	-	1.45	1.7	V
		$T_J = 175^\circ\text{C}$	-	1.98	2.5	
Reverse Current	I_R	$V_R = 1200\text{V}$ $T_J = 25^\circ\text{C}$	-	7.5	50	μA
		$T_J = 175^\circ\text{C}$	-	41	100	
Total Capacitance	C	$f = 1\text{MHz}$ $V_R = 0\text{V}$	-	1594	-	pF
		$V_R = 400\text{V}$	-	100	-	
		$V_R = 800\text{V}$	-	81	-	
Total Capacitive Charge	Q_C	$V_R = 800\text{V}$ $T_J = 25^\circ\text{C}$	-	103	-	nC
Capacitance Stored Energy	E_C	$V_R = 800\text{V}$	-	51	-	μJ

Thermal Characteristics

Parameter	Symbol	Test Condition	Value			Unit
			min.	typ.	max.	
Thermal Resistance, junction-case	$R_{th(j-c)}$		-	0.6	-	$^\circ\text{C/W}$



Typical Characteristics Curves

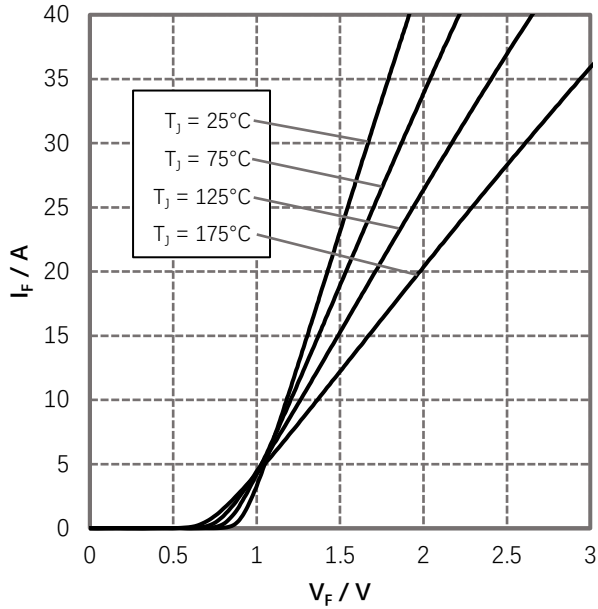


Figure 1. Forward Characteristics

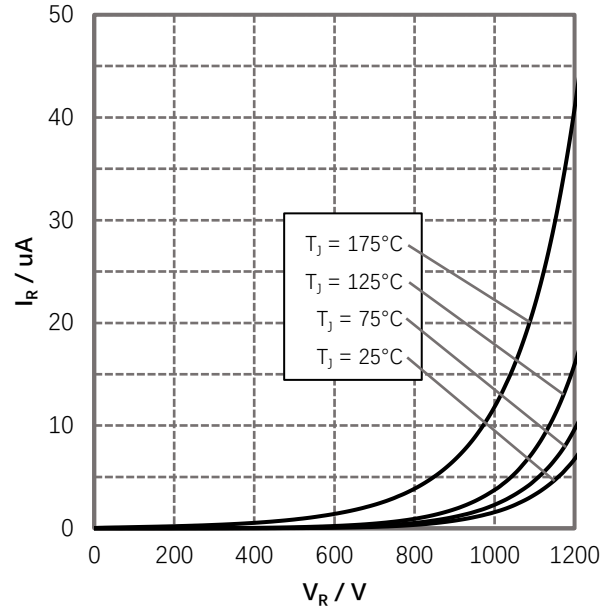


Figure 2. Reverse Characteristics

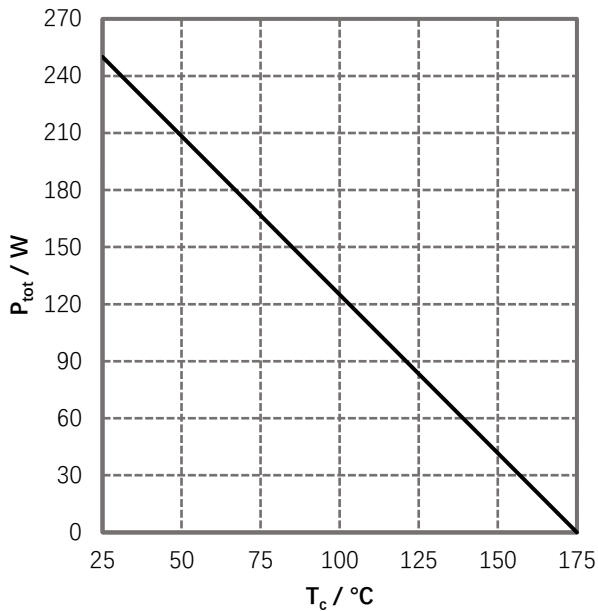


Figure 3. Power Derating

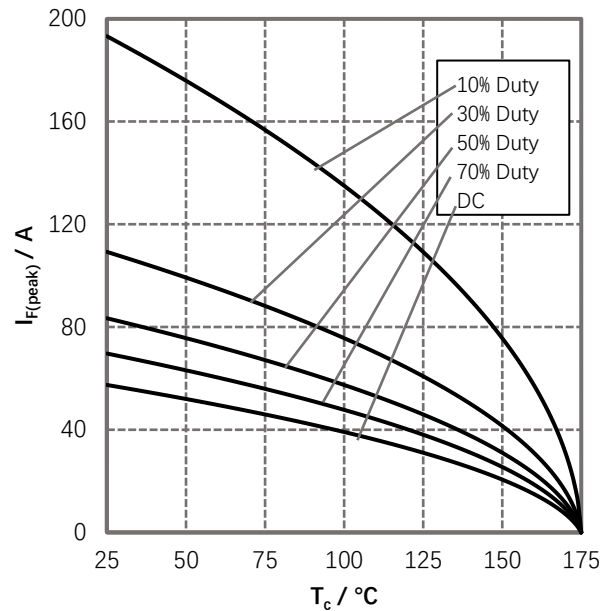


Figure 4. Current Derating



Typical Characteristics Curves

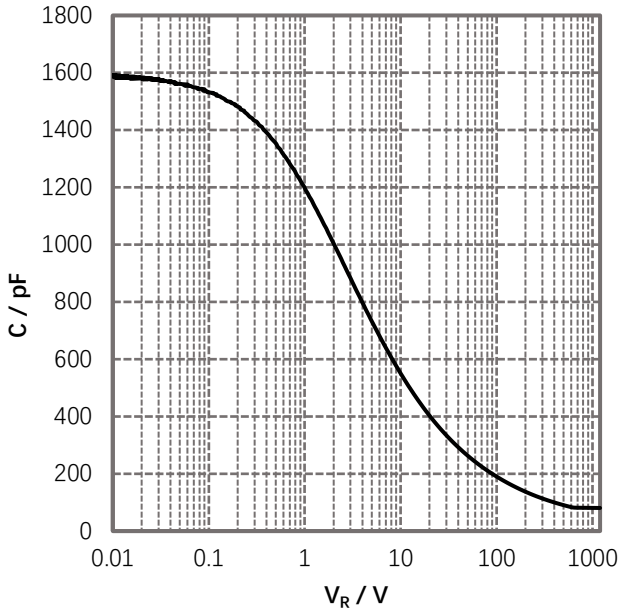


Figure 5. Capacitance vs. Reverse Voltage

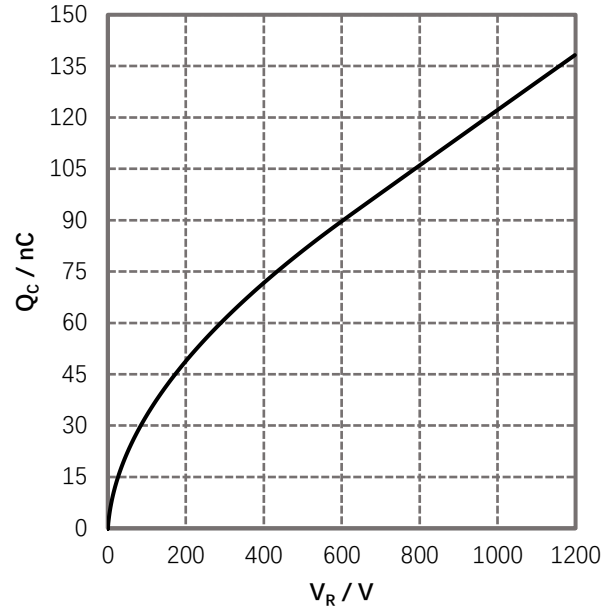


Figure 6. Reverse Charge vs. Reverse Voltage

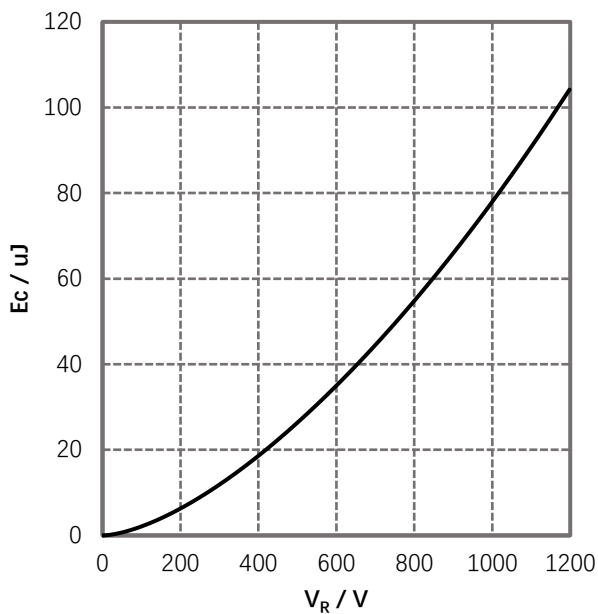


Figure 7. Capacitance Stored Energy


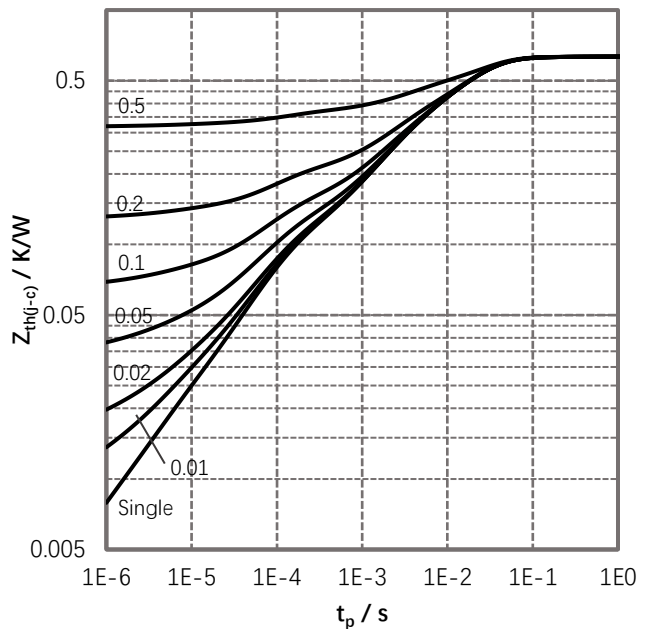


Figure 8. Transient Thermal Impedance



Package Dimensions

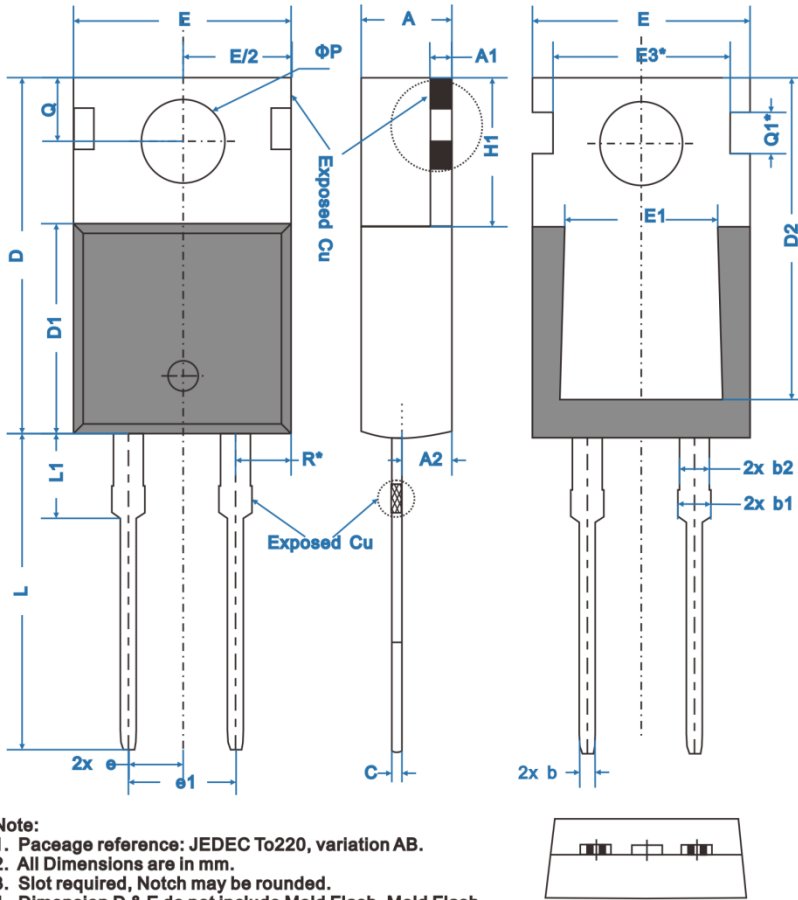

Unit: mm

Symbol	Dimensions			Notes
	Min	NOM	Max	
A	4.24	4.44	4.64	
A1	1.15	1.27	1.40	
A2	2.30	2.48	2.70	
b	0.70	0.80	0.90	
b1	1.20	1.55	1.75	
b2	1.20	1.45	1.70	
c	0.40	0.50	0.60	
D	14.70	15.37	16.00	4
D1	8.82	8.92	9.02	
D2	12.63	12.73	12.83	5
E	9.96	10.16	10.36	4,5
E1	6.86	7.77	8.89	5
E3*	8.70 Ref.			
e	2.54 BSC			
e1	5.08 BSC			
H1	6.30	6.45	6.60	5,6
L	13.47	13.72	13.97	
L1	3.60	3.80	4.00	
ΦP	3.75	3.80	4.00	
Q	2.60	2.80	3.00	
Q1*	1.73 Ref.			
R*	1.82 Ref.			

Note:

1. Package reference: JEDEC To220, variation AB.
2. All Dimensions are in mm.
3. Slot required, Notch may be rounded.
4. Dimension D & E do not include Mold Flash. Mold Flash shall not exceed 0.127 per side. These dimension are measured at the outermost extreme of the Plastic Body.
5. Thermal Pad contour optional within dimension E, H1, D2 & E1.
6. Dimension E2 & H1 define A zone where Stamping and Singulation Irregularities are allowed.
7. "*" is reference.

Ordering Information

Part Number	Marking	Package	Packaging Mode
G5S12020A	G5S12020A	TO-220AC	50pcs/Tube

Notes

- Global Power Technology reserves the right to change or modify any of the products and their inherent physical and technical specifications without prior notice.
- The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics.

Related Links

- Global Power Technology Website: <http://www.globalpowertech.cn/>
- GPT online store is now open! you can place an order directly online, buy it easily, and send it directly from the factory! For more detailed product, price information and coupon activities, please log in to GPT online store: <http://sc.globalpowertech.cn/>

