

HF167F

SOLAR RELAY



File No.: E133481



File No.: R50360703



File No.: CQC17002164558



Features

- 90A switching capability
100A loading current capability
- Applicable to solar photovoltaic inverter
- Contact gap:3.0 mm,4.0mm(764 Type)
- Low coil holding voltage contributes to saving energy of equipment
- UL insulation system: Class F

CONTACT DATA

Contact gap	3mm	4mm(764 Type)
Contact arrangement	1A	
Contact resistance(initial)	10mΩ max.(6VDC 20A)	
Contact material	AgSnO ₂ , AgNi	
Contact rating(Res. load)	Making 30A carrying 100A breaking 30A 1000VAC	
Max. switching voltage	1000VAC	
Max. switching current	90A	
Max. switching power	30000VA	
Mechanical endurance	1 x 10 ⁶ OPS	
Electrical endurance	a.3 x 10 ⁴ OPS (Making 30A, carrying 100A, breaking 30A, 400VAC, Resistive load, at 85°C, 1s on 9s off) b.1 x 10 ³ OPS (90A, 320VAC,Resistive load, at 85°C, 1s on 9s off) c.3 x 10 ⁴ OPS (Making 30A, carrying 100A, breaking 30A, 1000VAC, Resistive load, at 85°C, 1s on 9s off)	3 x 10 ⁴ OPS (Making 30A, carrying 100A, breaking 30A, 1000VAC, Resistive load, at 85°C, 1s on 9s off)

COIL

Coil power	Approx. 1.92W
Holding voltage	40% to 100% U _N (at 23°C) 50% to 60%U _N (at 85°C)

Notes: 1)The coil holding voltage is the voltage applied to coil 200ms after the rated voltage.
2)To avoid overheating and burning, the coil can not be consistently applied to with voltage larger than maximum holding voltage.

COIL DATA at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC max. ¹⁾	Drop-out Voltage VDC min. ¹⁾	Max. Voltage VDC ²⁾	Coil Resistance Ω
6	4.2	0.6	6.6	18.8 x (1±10%)
9	6.3	0.9	9.9	42.2 x (1±10%)
12	8.4	1.2	13.2	75 x (1±10%)
24	16.8	2.4	26.4	300 x (1±10%)

Notes: 1)The data shown above are initial values.
2)*Maximun voltage refers to the maximum voltage which relay coil could endure in a short period of time.

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between open contacts	2000VAC 1min
	Between coil & contacts	5000VAC 1min
Surge Voltage (Between coil & Main contacts)	10kV (1.2/50μs)	
Operate time (at rated. volt.)	30ms max.	
Release time (at rated. volt.)	10ms max.	
Temperature rise	70K max. (Contact load current 100A, Applied voltage of coil 100% rated voltage for 100ms holding voltage of coil 50% to 60% rated voltage, at 85°C)	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance*	10Hz to 55Hz 1.0mm DA	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C (Apply holding voltage to coil)	
Termination ²⁾	PCB	
Unit weight	Approx. 100g	
Construction	Flux proofed	

Notes: The data shown above are initial values.



HONGFA RELAY

ISO9001, IATF16949, ISO14001, ISO45001, IECQ QC 080000, ISO/IEC 27001 CERTIFIED

2023 Rev. 2.00

SAFETY APPROVAL RATINGS

UL/CUL	AgNi	HF167F...HF	90A 320VAC at 85°C General use 60A 320VAC at 85°C General use 40A 277VAC at 85°C General use Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HF(764)	Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
	AgSnO ₂	HF167F...HTF	90A 320VAC at 85°C General use 40A 277VAC at 85°C Resistive TV-15 120VAC at 85°C Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HTF(764)	Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
TÜV	AgNi	HF167F...HF	90A 320VAC at 85°C Resistive 40A 277VAC at 85°C General use Making 30A, carrying 100A, breaking 30A, 400VAC, 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HF(764)	Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
	AgSnO ₂	HF167F...HTF	Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HTF(764)	Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
CQC	AgNi	HF167F...HF	90A 320VAC at 85°C Resistive 60A 320VAC at 85°C Resistive 40A 277VAC at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HF(764)	Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
	AgSnO ₂	HF167F...HTF	90A 320VAC at 85°C Resistive 60A 320VAC at 85°C Resistive 40A 277VAC at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive
		HF167F...HTF(764)	Making 30A, carrying 100A, breaking 30A, 400VAC, at 85°C Resistive Making 30A, carrying 100A, breaking 30A, 1000VAC, at 85°C Resistive

Notes: 1) All values unspecified are at room temperature.

2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

Type	HF167F/	12	-H	T	F	(XXX)
Coil voltage	6, 9, 12, 24VDC					
Contact arrangement	H:1 Form A					
Contact material ¹⁾	T: AgSnO ₂		Nil: AgNi			
Insulation standard	F: Class F					
Special code ²⁾	XXX: Customer special requirement		Nil: Standard			

Notes: 1) When there is surge current in the load, it is recommended to use AgSnO₂ contact material and confirm it in actual use.

2) The customer special requirement express as special code after evaluating by Hongfa.


3) Water clearing or surface process is not suggested after the flux-proofed relays are assembled on PCB.

4) Please avoid using the relay in an environment containing organic silicon, otherwise the entry of organic silicon into the relay may acceleration contact failure. If there are harmful substances and elements such as water vapor, H₂S, SO₂, NO₂, Cl, P, etc. In the use of environmental gases, it may lead to increased contact resistance and poor contact during the use of relays. In the above situations, please control the materials or use plastic sealed type and arrange relevant tests to confirm.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm


Outline Dimensions

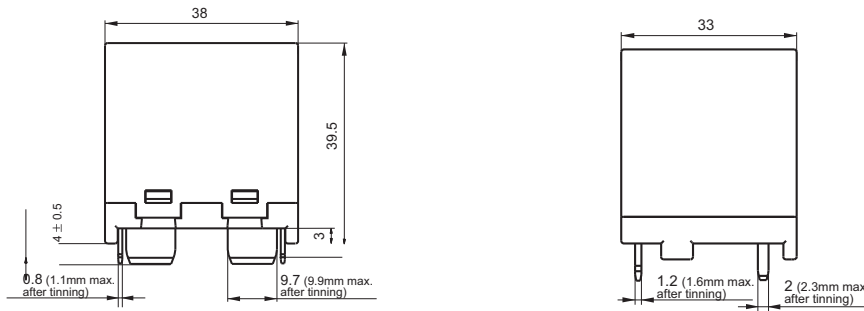

PCB Layout (Bottom view)



Wiring Diagram (Bottom view)



Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.

2) The tolerance without indicating for PCB layout is always ± 0.1 mm.

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.