

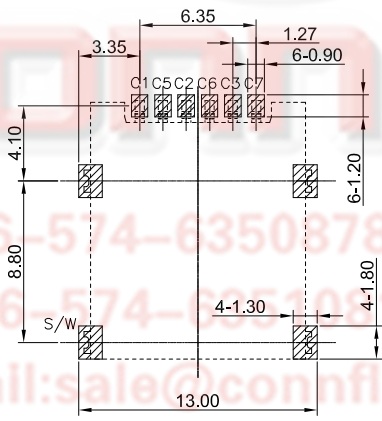
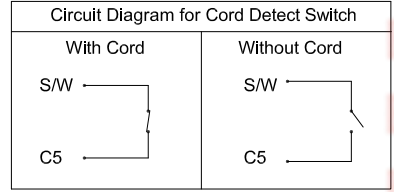



The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of this document in any format or manner. CONNPLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	1	2	3	4	5	6	7	8
Qty								
DC	1							
ED	1							
IE	1							
ISO	1							
PD	1							
R&D	1							
SD	1							
QA	1							
QC	1							
QE	1							

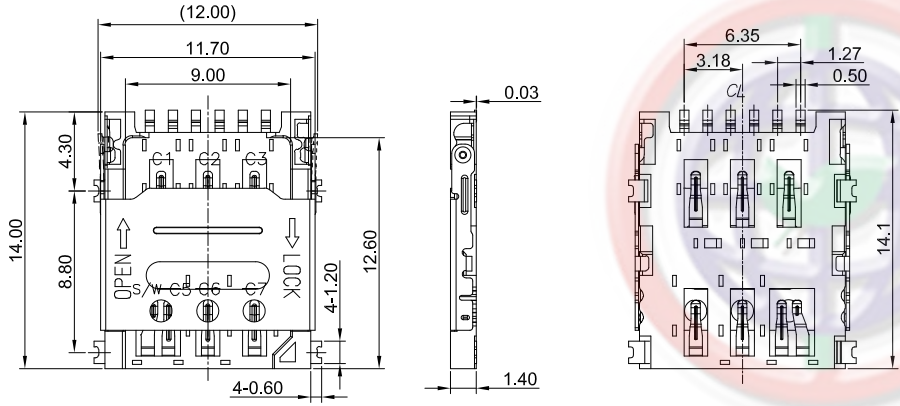

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	N/A
C5	GND
P6	VPP
P7	I/O
S/W	Switch Pin



Notes:

- Material:**
 - Housing: High Temp., UL 94V-0 Color of Black.
 - Contacts: Copper Alloy.
 - Shell: Stainless Steel.
- Finish:**
 - Contact Area: Gold Over Nickel
 - Solder Area: Matte Tin.
- Specifications:**
 - Temperature Rated: -30°C TO +85°C
 - Contact Resistance: 100mΩ Max.
 - Insulation Resistance: 100MΩ Min.
 - Withstanding Voltage : 100V AC.
 - Current Rating : 0.5A.
- Product Number Code:**

DS1138-17 - XX X X X X X X

- Packing Type
- R: Tape On Reel
- Shell Plating
- S: Stainless
- Housing Color
- B: Black
- Contact Plating
- 0: Selective gold flash
- 4: Selective 3u" gold
- Mounting Type
- S: SMT type
- Connector Type
- S: Socket
- NO. Of Contacts
- 06:6Pin

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	NANO SIM CARD 6P SMT
UNITS	mm		Hinged Type H=1.4mm
SHEET SIZE	A4	SERIES	DS1138-17 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1138-17-XXXXXXX-A		

晨翔电子有限公司
CONNPLY CONNPLY ELECTRONIC CO. LTD